

Lecture 4: Neural Networks and Backpropagation

Announcements

Cloud credits for projects: we are in the process of securing them and will announce them as soon as we can.

Assignment 1 due Fri 4/19 at 11:59pm

Administrative: Project Proposal

Due Mon 4/22

TA expertise are posted on the webpage.

(http://cs231n.stanford.edu/office_hours.html)

Administrative: Live Q&A

For students who are watching the lecture online live:

- We are hosting a live Q&A session on Ed
- Questions will be responded to by TAs as much as possible.
- See the Live Lecture Q&A megathread pinned on Ed for more information

Administrative: Discussion Section

Discussion section tomorrow (led by Lucas Leanza):

Backpropagation

Recap


- We have some dataset of (x, y)
- We have a score function:
- We have a loss function:

$$s = f(x; W) \stackrel{\text{e.g.}}{=} Wx$$


$$L_i = -\log\left(\frac{e^{s_{y_i}}}{\sum_j e^{s_j}}\right) \text{ Softmax}$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \text{ SVM}$$

$$L = \frac{1}{N} \sum_{i=1}^N L_i + R(W) \text{ Full loss}$$

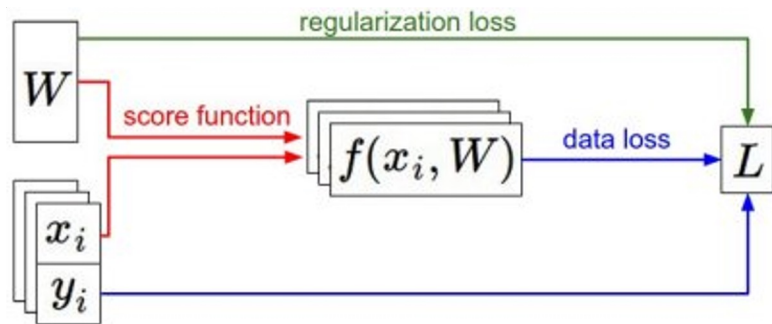

Finding the best W: Optimize with Gradient Descent

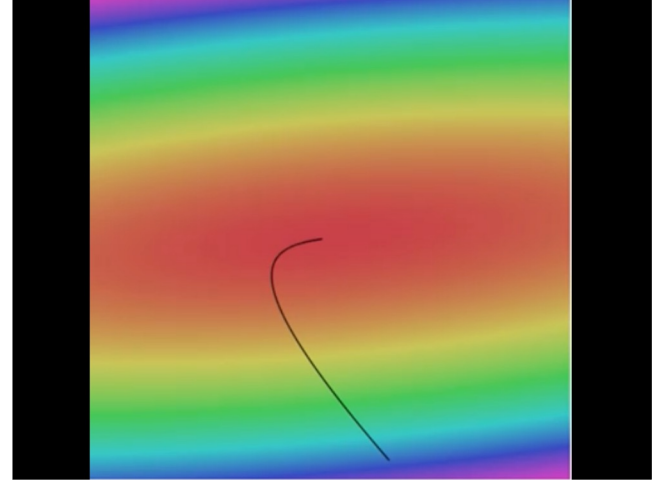

```
# Vanilla Gradient Descent
```

```
while True:
```

```
    weights_grad = evaluate_gradient(loss_fun, data, weights)
```

```
    weights += - step_size * weights_grad # perform parameter update
```

[Landscape image](#) is [CC0.1.0](#) public domain

[Walking man image.js](#) [CC0.1.0](#) public domain

Gradient descent

$$\frac{df(x)}{dx} = \lim_{h \rightarrow 0} \frac{f(x+h) - f(x)}{h}$$

Numerical gradient: slow :(, approximate :(, easy to write :)
Analytic gradient: fast :), exact :), error-prone :(

In practice: Derive analytic gradient, check your implementation with numerical gradient

Stochastic Gradient Descent (SGD)

$$L(W) = \frac{1}{N} \sum_{i=1}^N L_i(x_i, y_i, W) + \lambda R(W)$$

$$\nabla_W L(W) = \frac{1}{N} \sum_{i=1}^N \nabla_W L_i(x_i, y_i, W) + \lambda \nabla_W R(W)$$

Full sum expensive
when N is large!

Approximate sum using
a minibatch of examples
32 / 64 / 128 common

```
# Vanilla Minibatch Gradient Descent
```


```
while True:
```

```
    data_batch = sample_training_data(data, 256) # sample 256 examples
```

```
    weights_grad = evaluate_gradient(loss_fun, data_batch, weights)
```


```
    weights += - step_size * weights_grad # perform parameter update
```

Last time: fancy optimizers

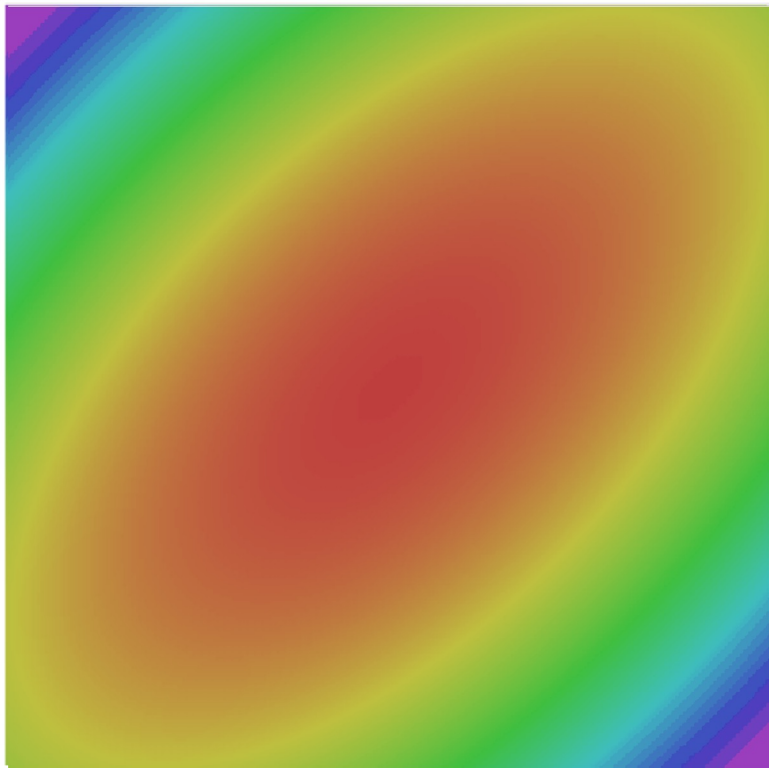

- SGD
- SGD+Momentum
- RMSProp
- Adam

Last time: learning rate scheduling

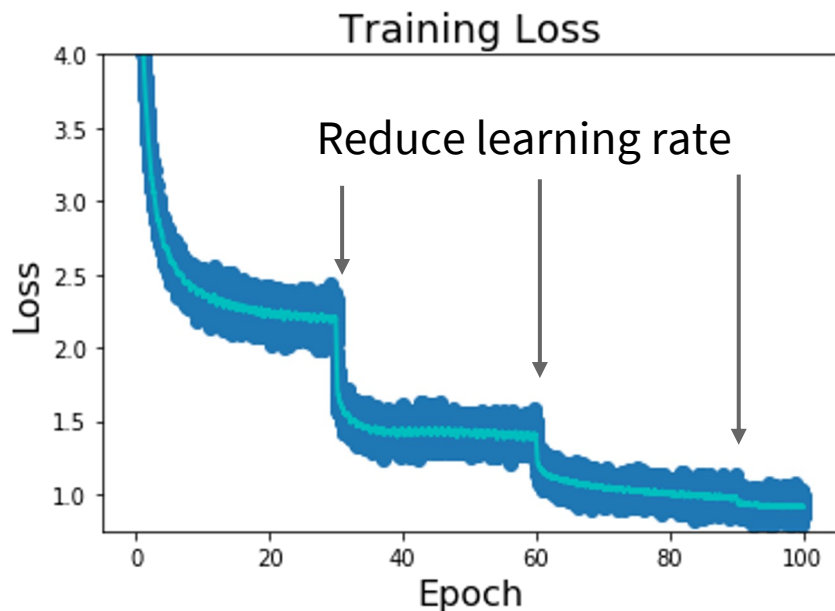

Step: Reduce learning rate at a few fixed points.
E.g. for ResNets, multiply LR by 0.1 after epochs 30, 60, and 90.

Cosine: $\alpha_t = \frac{1}{2}\alpha_0 (1 + \cos(t\pi/T))$

Linear: $\alpha_t = \alpha_0(1 - t/T)$

Inverse sqrt: $\alpha_t = \alpha_0/\sqrt{t}$

α_0 : Initial learning rate

α_t : Learning rate at epoch t

T : Total number of epochs

Today:

Deep Learning

DALL-E 2



“Teddy bears working on new AI research on the moon in the 1980s.”





“Rabbits attending a college seminar on human anatomy.”



“A wise cat meditating in the Himalayas searching for enlightenment.”

Image source: Sam Altman, <https://openai.com/dall-e-2/>, <https://twitter.com/sama/status/1511724264629678084>

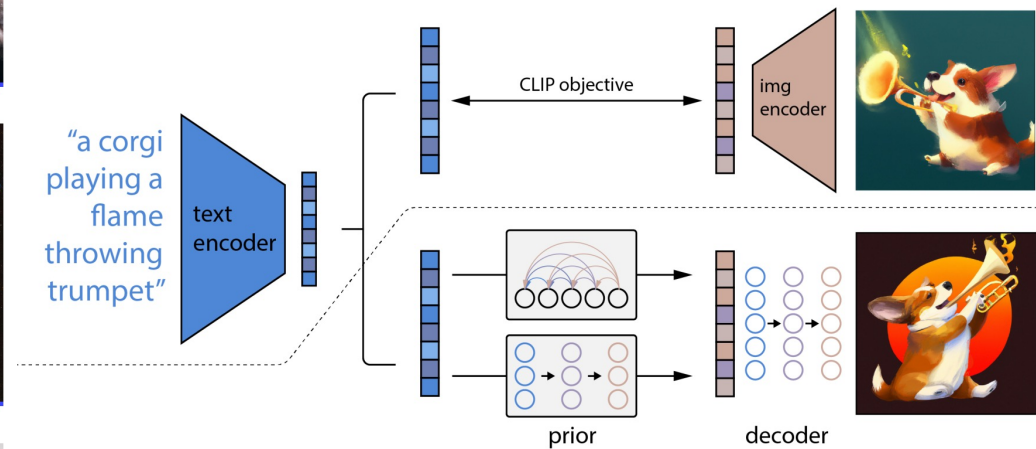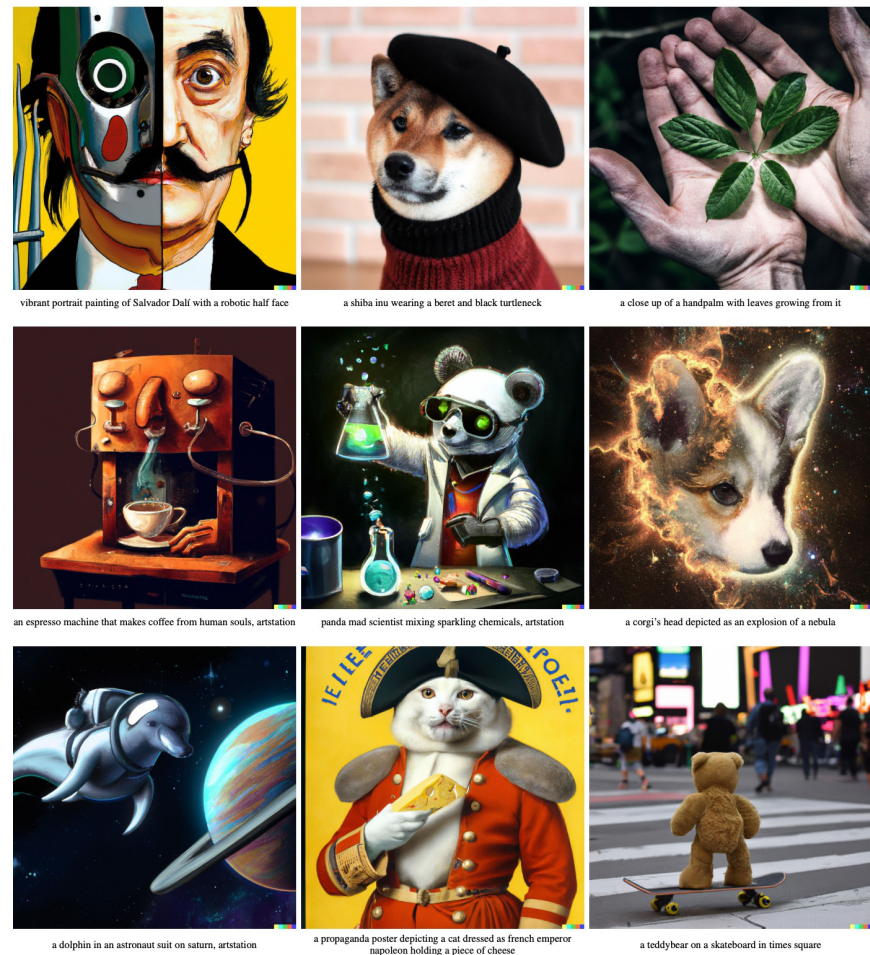

Ramesh et al., Hierarchical Text-Conditional Image Generation with CLIP Latents, 2022.

DALL-E 3

In a fantastical setting, a highly detailed furry humanoid skunk with piercing eyes confidently poses in a medium shot, wearing an animal hide jacket. The artist has masterfully rendered the character in digital art, capturing the intricate details of fur and clothing texture.



Betker, James, et al. "Improving image generation with better captions." *Computer Science*. <https://cdn.openai.com/papers/dall-e-3.pdf> (2023).

DALL-E 3

An illustration from a graphic novel. A bustling city street under the shine of a full moon. The sidewalks bustling with pedestrians enjoying the nightlife. At the corner stall, a young woman with fiery red hair, dressed in a signature velvet cloak, is haggling with the grumpy old vendor. The grumpy vendor, a tall, sophisticated man wearing a sharp suit, who sports a noteworthy mustache is animatedly conversing on his steampunk telephone.

The sidewalks bustling with **pedestrians enjoying the nightlife**.

A bustling city street under the shine of a **full moon**.



At the corner stall, a **young woman** with fiery red hair, dressed in a signature velvet cloak, is **haggling with the grumpy old vendor**.

The grumpy vendor, a **tall, sophisticated man**, is wearing a sharp suit, sports a **noteworthy moustache** and is animatedly conversing on his **steampunk telephone**.

Betker, James, et al. "Improving image generation with better captions." *Computer Science*. <https://cdn.openai.com/papers/dall-e-3.pdf> (2023).

GPT-4

User What is unusual about this image?



Source: [Barnorama](#)

GPT-4 The unusual thing about this image is that a man is ironing clothes on an ironing board attached to the roof of a moving taxi.

User Can you explain this meme?

Sometimes I just look at pictures of the earth from space and I marvel at how beautiful it all is.



GPT-4 This meme is a joke that combines two unrelated things: pictures of the earth from space and chicken nuggets. The text of the meme suggests that the image below is a beautiful picture of the earth from space. However, the image is actually of chicken nuggets arranged to vaguely resemble a map of the world. The humor in this meme comes from the unexpected juxtaposition of the text and the image. The text sets up an expectation of a majestic image of the earth, but the image is actually something mundane and silly.

Image source: <https://openai.com/research/gpt-4>

Segment Anything Model (SAM)

300-400 masks



400-500 masks



>500 masks





Sora

- Animating Images
(generated by DALL-E)
- Video-to-video editing



A Shiba Inu dog wearing a beret and black turtleneck.



put the video in space with a rainbow road




change the video setting to be different than a mountain? perhaps joshua tree

<https://openai.com/research/video-generation-models-as-world-simulators>

Sora

- More compute

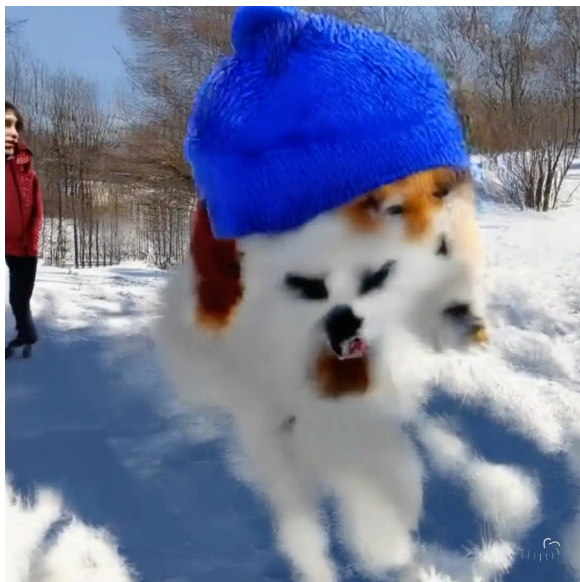

Base Compute



4x Compute



32x Compute

<https://openai.com/research/video-generation-models-as-world-simulators>

Neural Networks

Neural networks: the original linear classifier

(Before) Linear score function: $f = Wx$

$$x \in \mathbb{R}^D, W \in \mathbb{R}^{C \times D}$$

Neural networks: 2 layers

(Before) Linear score function:

$$f = Wx$$


(Now) 2-layer Neural Network

$$f = W_2 \max(0, W_1 x)$$

$$x \in \mathbb{R}^D, W_1 \in \mathbb{R}^{H \times D}, W_2 \in \mathbb{R}^{C \times H}$$


(In practice we will usually add a learnable bias at each layer as well)

Why do we want non-linearity?

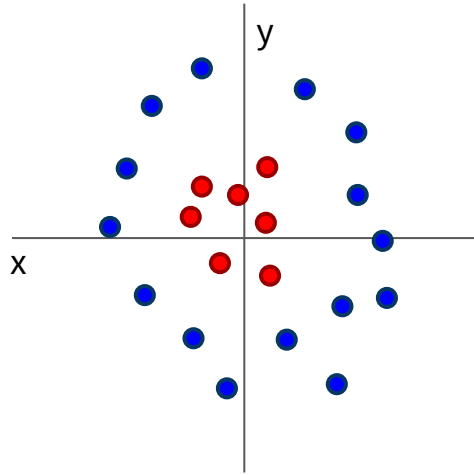


Cannot separate red and blue points with linear classifier

Why do we want non-linearity?

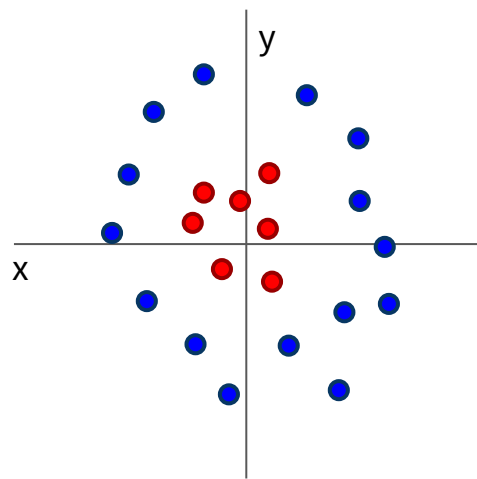

Cannot separate red and blue points with linear classifier

$$f(x, y) = (r(x, y), \theta(x, y))$$

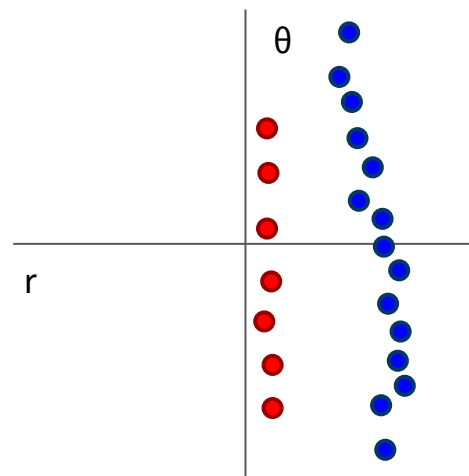

After applying feature transform, points can be separated by linear classifier

Neural networks: also called fully connected network

(Before) Linear score function: $f = Wx$

(Now) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

$$x \in \mathbb{R}^D, W_1 \in \mathbb{R}^{H \times D}, W_2 \in \mathbb{R}^{C \times H}$$

“Neural Network” is a very broad term; these are more accurately called “fully-connected networks” or sometimes “multi-layer perceptrons” (MLP)

(In practice we will usually add a learnable bias at each layer as well)

Neural networks: 3 layers

(Before) Linear score function: $f = Wx$

(Now) 2-layer Neural Network
or 3-layer Neural Network $f = W_2 \max(0, W_1 x)$

$$f = W_3 \max(0, W_2 \max(0, W_1 x))$$


$$x \in \mathbb{R}^D, W_1 \in \mathbb{R}^{H_1 \times D}, W_2 \in \mathbb{R}^{H_2 \times H_1}, W_3 \in \mathbb{R}^{C \times H_2}$$

(In practice we will usually add a learnable bias at each layer as well)

Neural networks: hierarchical computation

(Before) Linear score function: $f = Wx$

(Now) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$


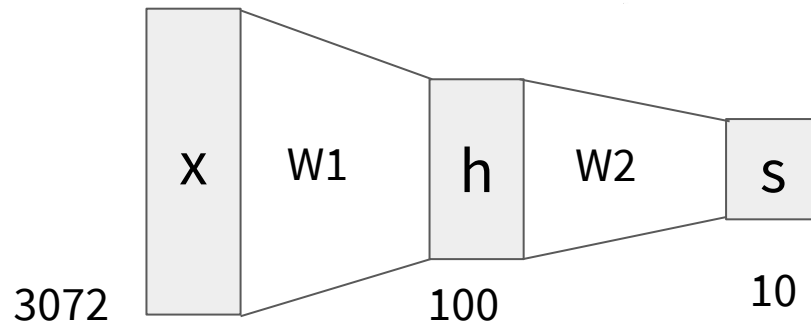


$$x \in \mathbb{R}^D, W_1 \in \mathbb{R}^{H \times D}, W_2 \in \mathbb{R}^{C \times H}$$

Neural networks: learning 100s of templates

(Before) Linear score function: $f = Wx$

(Now) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

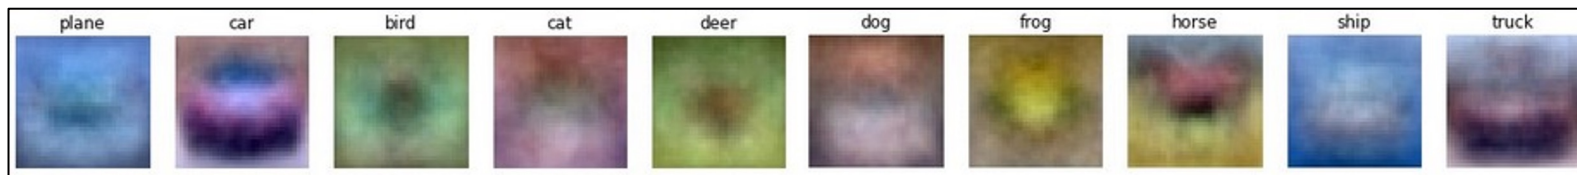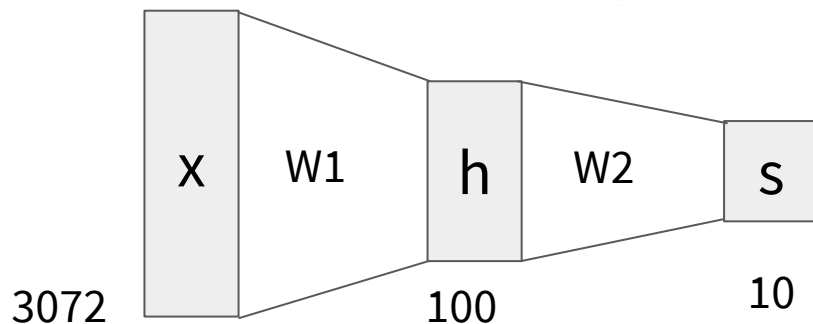

Learn 100 templates instead of 10.

Share templates between classes

Neural networks: why is max operator important?

(Before) Linear score function: $f = Wx$

(Now) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

The function $\max(0, z)$ is called the activation function.

Q: What if we try to build a neural network without one?

$$f = W_2 W_1 x$$

Neural networks: why is max operator important?

(Before) Linear score function: $f = Wx$

(Now) 2-layer Neural Network $f = W_2 \max(0, W_1 x)$

The function $\max(0, z)$ is called the activation function.

Q: What if we try to build a neural network without one?


$$f = W_2 W_1 x \quad W_3 = W_2 W_1 \in \mathbb{R}^{C \times H}, f = W_3 x$$

A: We end up with a linear classifier again!

Activation functions


Sigmoid

$$\sigma(x) = \frac{1}{1+e^{-x}}$$




tanh

$\tanh(x)$




ReLU

$\max(0, x)$



ReLU is a good default choice for most problems

Leaky ReLU
 $\max(0.1x, x)$




Maxout


$\max(w_1^T x + b_1, w_2^T x + b_2)$

ELU

$$\begin{cases} x & x \geq 0 \\ \alpha(e^x - 1) & x < 0 \end{cases}$$




Neural networks: Architectures

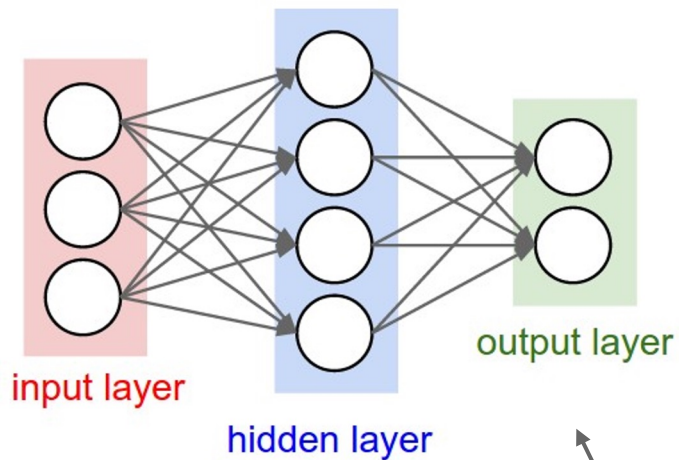


“2-layer Neural Net”, or
“1-hidden-layer Neural Net”

“Fully-connected” layers

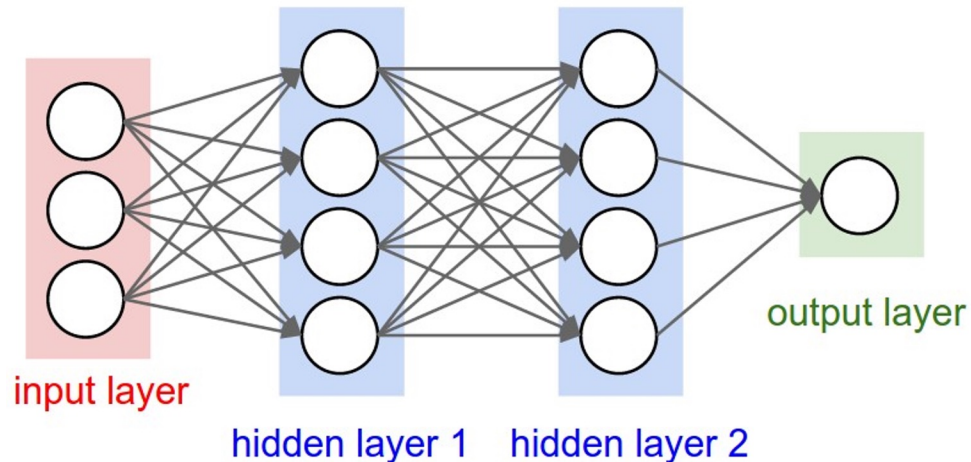

“3-layer Neural Net”, or
“2-hidden-layer Neural Net”

Example feed-forward computation of a neural network

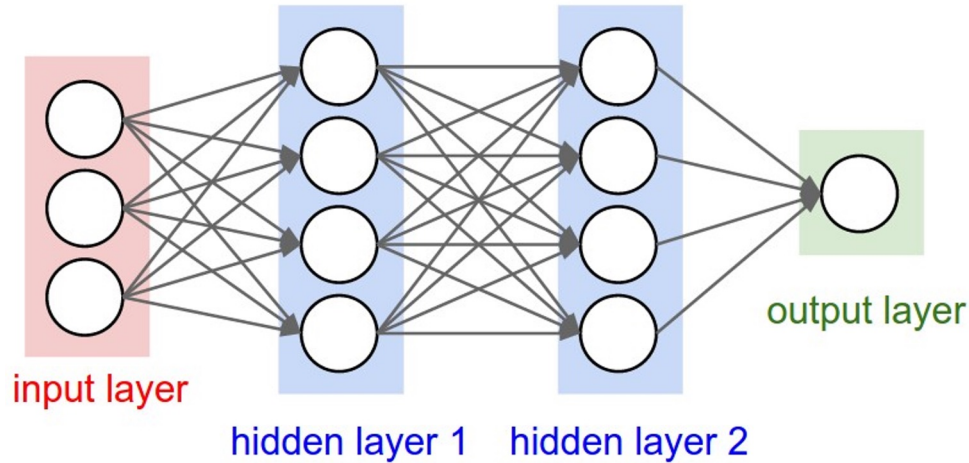

```
# forward-pass of a 3-layer neural network:
```

```
f = lambda x: 1.0/(1.0 + np.exp(-x)) # activation function (use sigmoid)
x = np.random.randn(3, 1) # random input vector of three numbers (3x1)
h1 = f(np.dot(W1, x) + b1) # calculate first hidden layer activations (4x1)
h2 = f(np.dot(W2, h1) + b2) # calculate second hidden layer activations (4x1)
out = np.dot(W3, h2) + b3 # output neuron (1x1)
```

Full implementation of training a 2-layer Neural Network needs ~20 lines:

```
1 import numpy as np
2 from numpy.random import randn
3
4 N, D_in, H, D_out = 64, 1000, 100, 10
5 x, y = randn(N, D_in), randn(N, D_out)
6 w1, w2 = randn(D_in, H), randn(H, D_out)
7
8 for t in range(2000):
9     h = 1 / (1 + np.exp(-x.dot(w1)))
10    y_pred = h.dot(w2)
11    loss = np.square(y_pred - y).sum()
12    print(t, loss)
13
14    grad_y_pred = 2.0 * (y_pred - y)
15    grad_w2 = h.T.dot(grad_y_pred)
16    grad_h = grad_y_pred.dot(w2.T)
17    grad_w1 = x.T.dot(grad_h * h * (1 - h))
18
19    w1 -= 1e-4 * grad_w1
20    w2 -= 1e-4 * grad_w2
```


Full implementation of training a 2-layer Neural Network needs ~20 lines:

```
1 import numpy as np
2 from numpy.random import randn
3
4 N, D_in, H, D_out = 64, 1000, 100, 10
5 x, y = randn(N, D_in), randn(N, D_out)
6 w1, w2 = randn(D_in, H), randn(H, D_out)
7
8 for t in range(2000):
9     h = 1 / (1 + np.exp(-x.dot(w1)))
10    y_pred = h.dot(w2)
11    loss = np.square(y_pred - y).sum()
12    print(t, loss)
13
14    grad_y_pred = 2.0 * (y_pred - y)
15    grad_w2 = h.T.dot(grad_y_pred)
16    grad_h = grad_y_pred.dot(w2.T)
17    grad_w1 = x.T.dot(grad_h * h * (1 - h))
18
19    w1 -= 1e-4 * grad_w1
20    w2 -= 1e-4 * grad_w2
```

Define the network

Full implementation of training a 2-layer Neural Network needs ~20 lines:

```
1 import numpy as np
2 from numpy.random import randn
3
4 N, D_in, H, D_out = 64, 1000, 100, 10
5 x, y = randn(N, D_in), randn(N, D_out)
6 w1, w2 = randn(D_in, H), randn(H, D_out)
7
8 for t in range(2000):
9     h = 1 / (1 + np.exp(-x.dot(w1)))
10    y_pred = h.dot(w2)
11    loss = np.square(y_pred - y).sum()
12    print(t, loss)
13
14    grad_y_pred = 2.0 * (y_pred - y)
15    grad_w2 = h.T.dot(grad_y_pred)
16    grad_h = grad_y_pred.dot(w2.T)
17    grad_w1 = x.T.dot(grad_h * h * (1 - h))
18
19    w1 -= 1e-4 * grad_w1
20    w2 -= 1e-4 * grad_w2
```

Define the network

Forward pass

Full implementation of training a 2-layer Neural Network needs ~20 lines:

```
1 import numpy as np
2 from numpy.random import randn
3
4 N, D_in, H, D_out = 64, 1000, 100, 10
5 x, y = randn(N, D_in), randn(N, D_out)
6 w1, w2 = randn(D_in, H), randn(H, D_out)
7
8 for t in range(2000):
9     h = 1 / (1 + np.exp(-x.dot(w1)))
10    y_pred = h.dot(w2)
11    loss = np.square(y_pred - y).sum()
12    print(t, loss)
13
14    grad_y_pred = 2.0 * (y_pred - y)
15    grad_w2 = h.T.dot(grad_y_pred)
16    grad_h = grad_y_pred.dot(w2.T)
17    grad_w1 = x.T.dot(grad_h * h * (1 - h))
18
19    w1 -= 1e-4 * grad_w1
20    w2 -= 1e-4 * grad_w2
```

Define the network

Forward pass

Calculate the analytical gradients

Full implementation of training a 2-layer Neural Network needs ~20 lines:

```
1 import numpy as np
2 from numpy.random import randn
3
4 N, D_in, H, D_out = 64, 1000, 100, 10
5 x, y = randn(N, D_in), randn(N, D_out)
6 w1, w2 = randn(D_in, H), randn(H, D_out)
7
8 for t in range(2000):
9     h = 1 / (1 + np.exp(-x.dot(w1)))
10    y_pred = h.dot(w2)
11    loss = np.square(y_pred - y).sum()
12    print(t, loss)
13
14    grad_y_pred = 2.0 * (y_pred - y)
15    grad_w2 = h.T.dot(grad_y_pred)
16    grad_h = grad_y_pred.dot(w2.T)
17    grad_w1 = x.T.dot(grad_h * h * (1 - h))
18
19    w1 -= 1e-4 * grad_w1
20    w2 -= 1e-4 * grad_w2
```


Define the network

Forward pass

Calculate the analytical gradients

Gradient descent


Setting the number of layers and their sizes

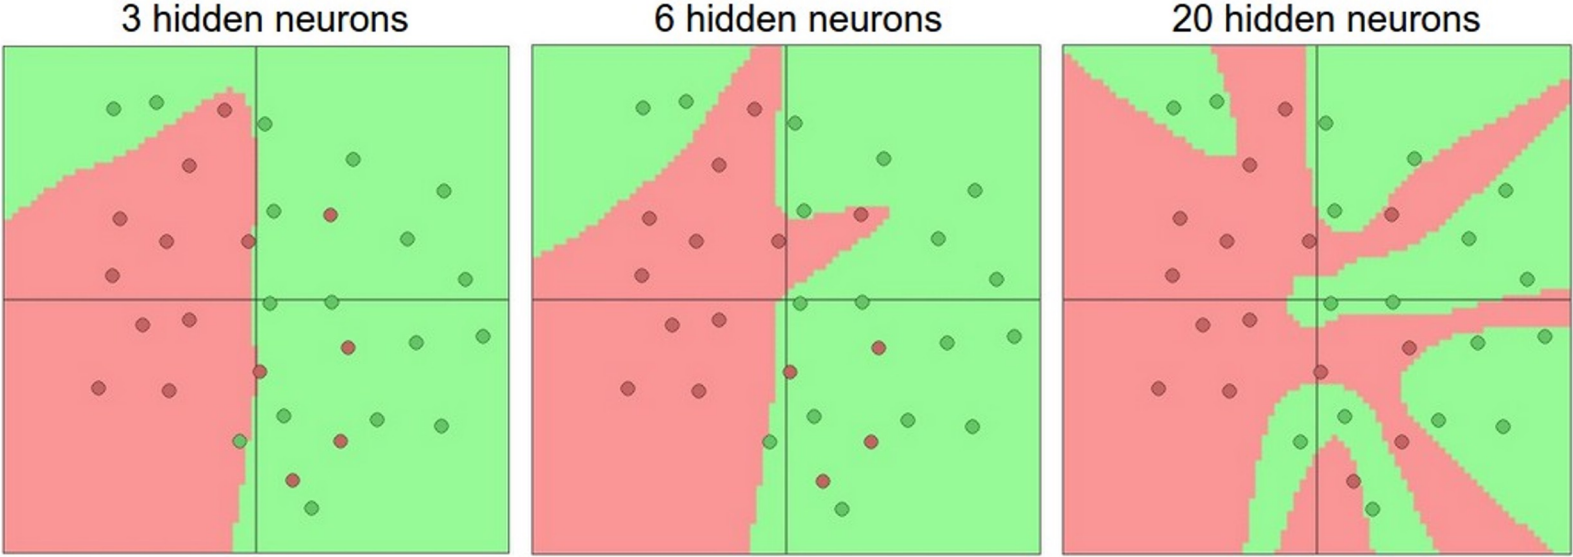


↑
more neurons = more capacity

Do not use size of neural network as a regularizer. Use stronger regularization instead:

$\lambda = 0.001$

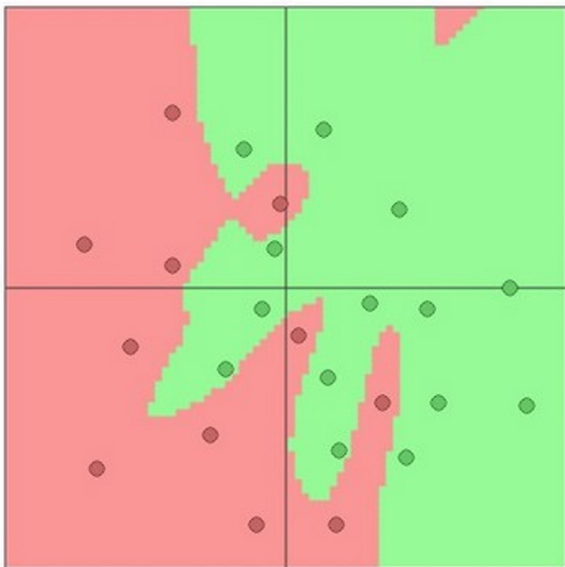

$\lambda = 0.01$

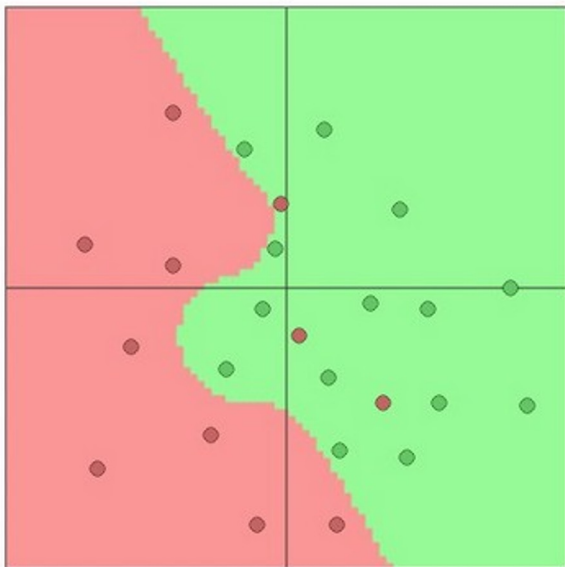

$\lambda = 0.1$



(Web demo with ConvNetJS:

<http://cs.stanford.edu/people/karpathy/convnetjs/demo/classify2d.html>)


TensorFlow Play Ground: <https://playground.tensorflow.org/>

$$L(W) = \frac{1}{N} \sum_{i=1}^N L_i(f(x_i, W), y_i) + \lambda R(W)$$



[This image](#) by [Fotis Bobolas](#) is licensed under [CC-BY 2.0](#)


Impulses carried toward cell body

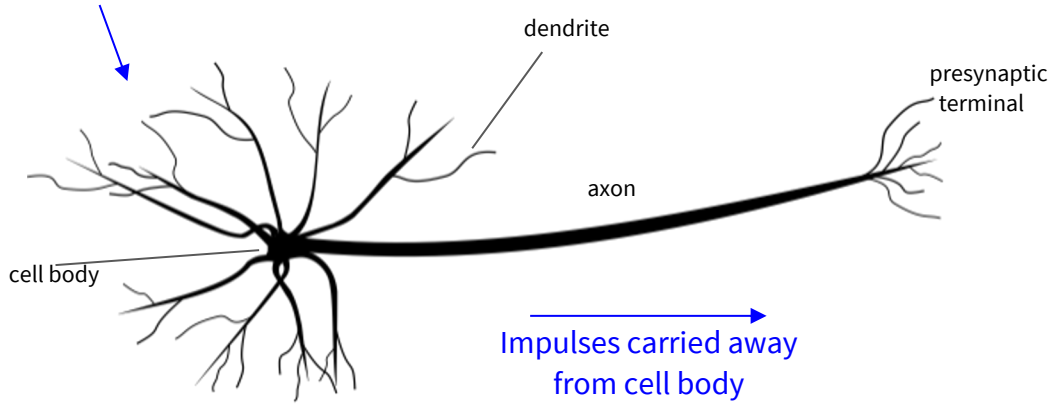

Impulses carried away
from cell body


[This image](#) by Felipe Perucho
is licensed under [CC-BY 3.0](#)

Impulses carried toward cell body

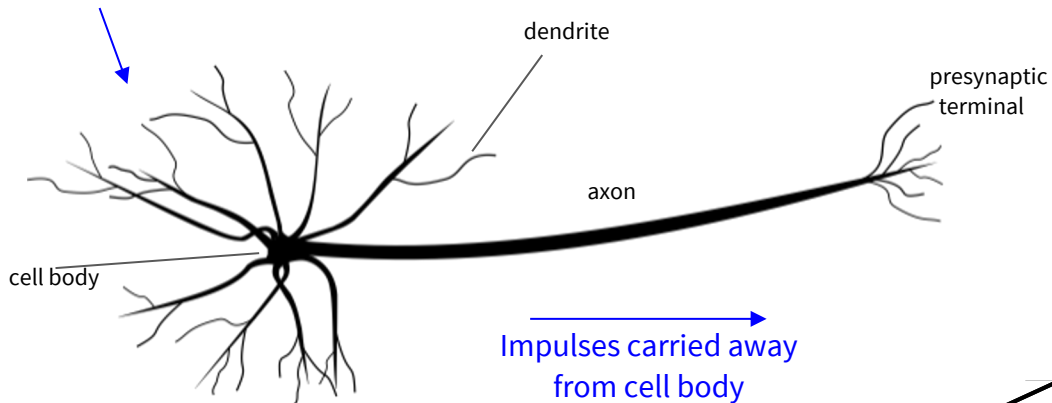


Impulses carried away from cell body


This image by Felipe Perucho is licensed under [CC-BY 3.0](https://creativecommons.org/licenses/by/3.0/)

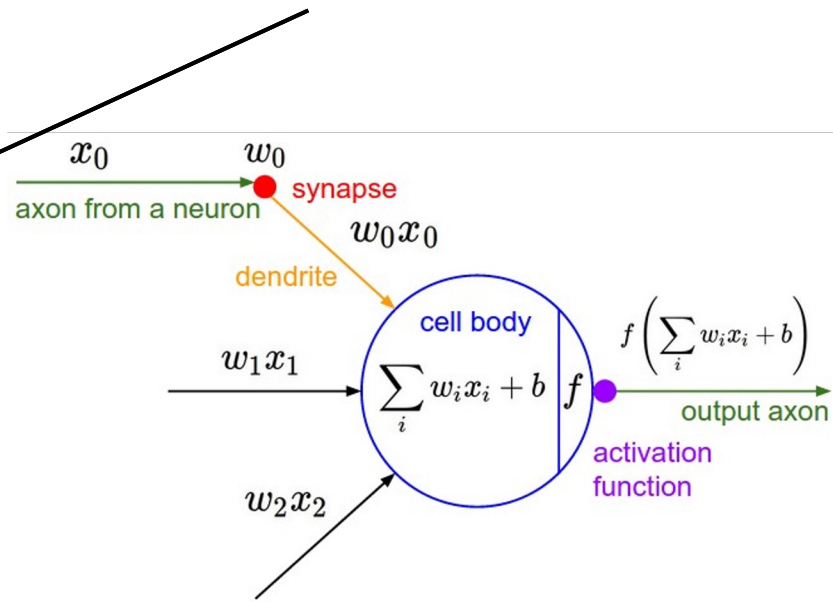

Impulses carried toward cell body

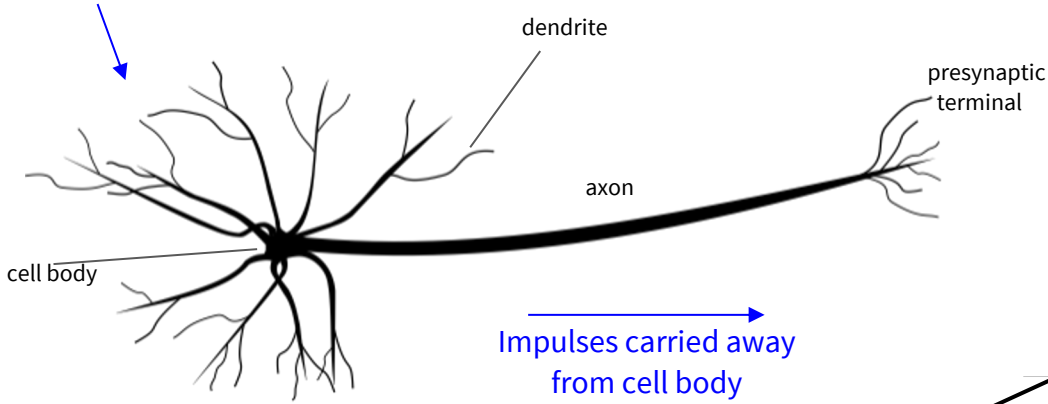


This image by Felipe Perucho is licensed under [CC-BY 3.0](https://creativecommons.org/licenses/by/3.0/)

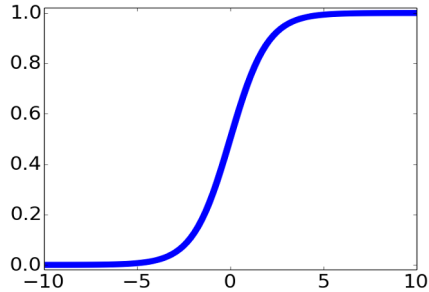


sigmoid activation function

$$\frac{1}{1 + e^{-x}}$$

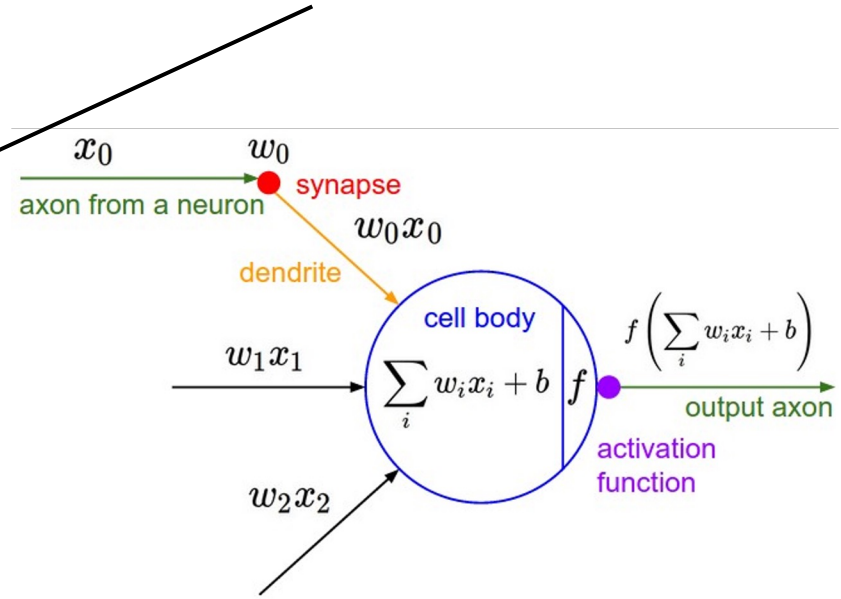


Biological Neurons: Complex connectivity patterns

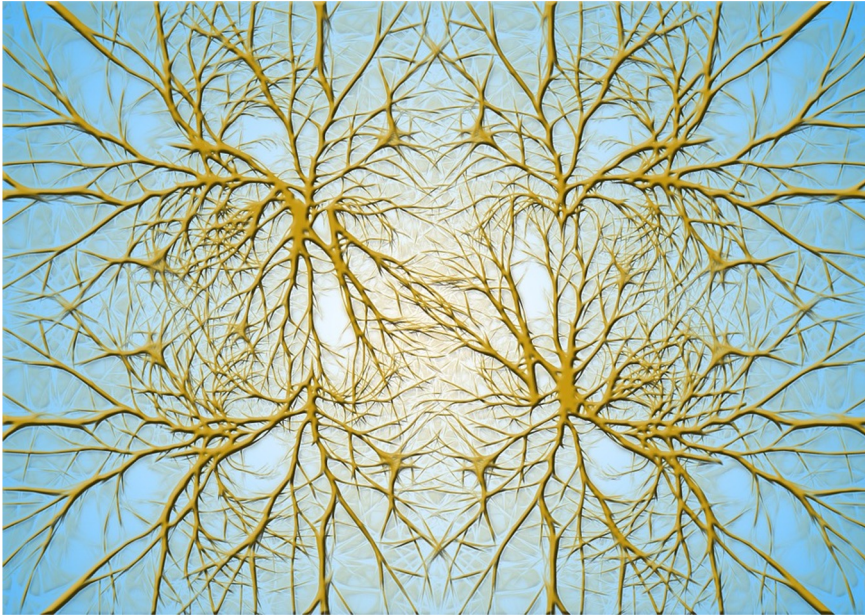


[This image is CC0 Public Domain](#)

Neurons in a neural network: Organized into regular layers for computational efficiency

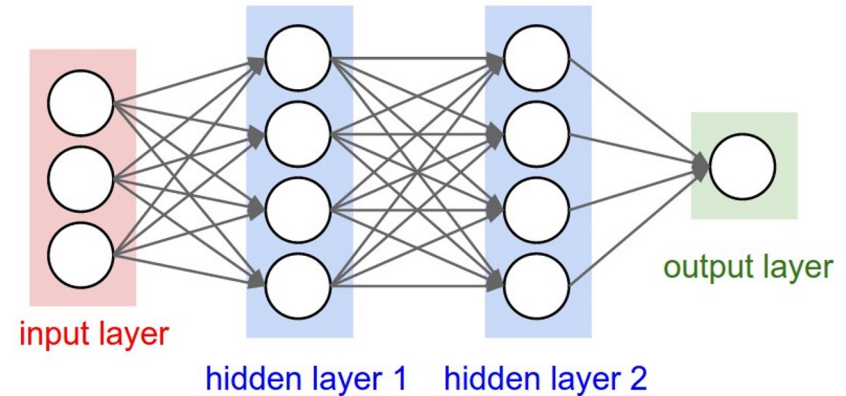


Biological Neurons: Complex connectivity patterns

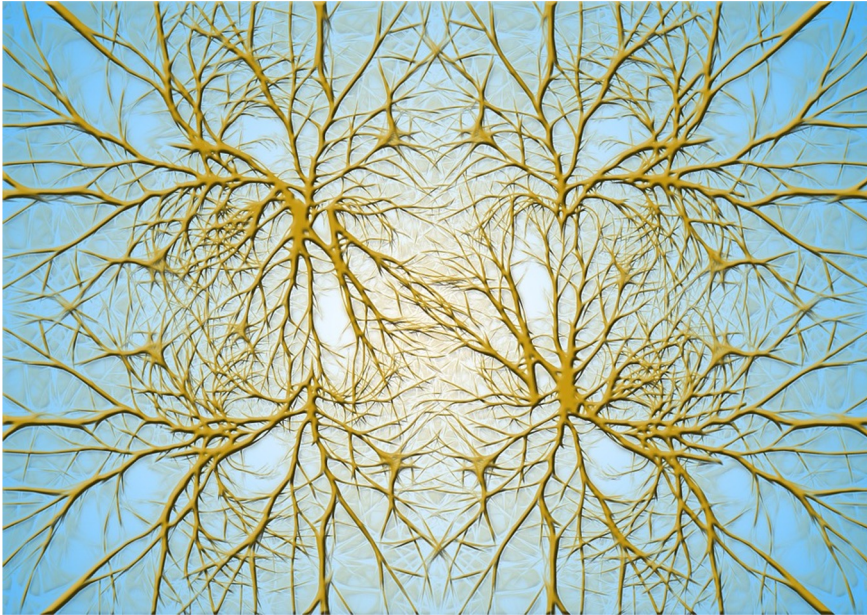

[This image is CC0 Public Domain](#)

But neural networks with random connections can work too!

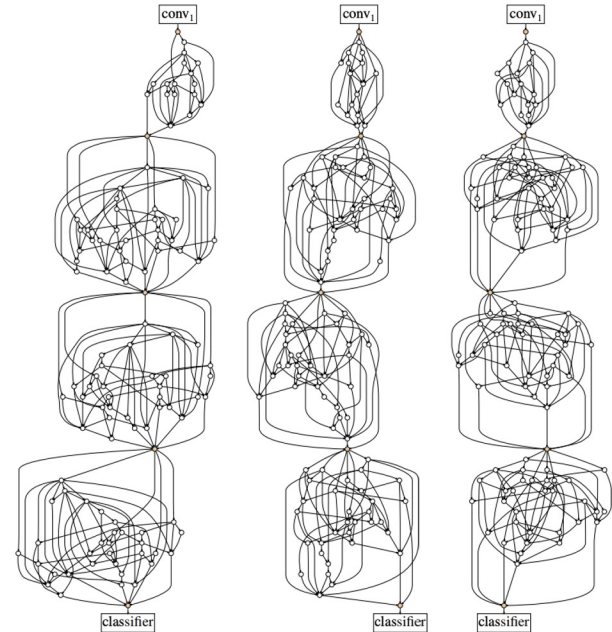

Xie et al, "Exploring Randomly Wired Neural Networks for Image Recognition", IEEE/CVF International Conference on Computer Vision 2019

Be very careful with your brain analogies!

Biological Neurons:

- Many different types
- Dendrites can perform complex non-linear computations
- Synapses are not a single weight but a complex non-linear dynamical system

[Dendritic Computation. London and Hausser]

Plugging in neural networks with loss functions

$$s = f(x; W_1, W_2) = W_2 \max(0, W_1 x) \quad \text{Nonlinear score function}$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \quad \text{SVM Loss on predictions}$$

$$R(W) = \sum_k W_k^2 \quad \text{Regularization}$$

$$L = \frac{1}{N} \sum_{i=1}^N L_i + \lambda R(W_1) + \lambda R(W_2) \quad \text{Total loss: data loss + regularization}$$

Problem: How to compute gradients?

$$s = f(x; W_1, W_2) = W_2 \max(0, W_1 x) \quad \text{Nonlinear score function}$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \quad \text{SVM Loss on predictions}$$

$$R(W) = \sum_k W_k^2 \quad \text{Regularization}$$

$$L = \frac{1}{N} \sum_{i=1}^N L_i + \lambda R(W_1) + \lambda R(W_2) \quad \text{Total loss: data loss + regularization}$$

If we can compute $\frac{\partial L}{\partial W_1}$, $\frac{\partial L}{\partial W_2}$, we can learn W_1 and W_2

(Bad) Idea: Derive $\nabla_W L$ on paper

$$s = f(x; W) = Wx$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

$$= \sum_{j \neq y_i} \max(0, W_{j,:} \cdot x + W_{y_i,:} \cdot x + 1)$$

$$L = \frac{1}{N} \sum_{i=1}^N L_i + \lambda \sum_k W_k^2$$

$$= \frac{1}{N} \sum_{i=1}^N \sum_{j \neq y_i} \max(0, W_{j,:} \cdot x + W_{y_i,:} \cdot x + 1) + \lambda \sum_k W_k^2$$


$$\nabla_W L = \nabla_W \left(\frac{1}{N} \sum_{i=1}^N \sum_{j \neq y_i} \max(0, W_{j,:} \cdot x + W_{y_i,:} \cdot x + 1) + \lambda \sum_k W_k^2 \right)$$

Problem: Very tedious: Lots of matrix calculus, need lots of paper

Problem: What if we want to change loss? E.g. use softmax instead of SVM? Need to re-derive from scratch = (

Problem: Not feasible for very complex models!

Better Idea: Computational graphs + Backpropagation

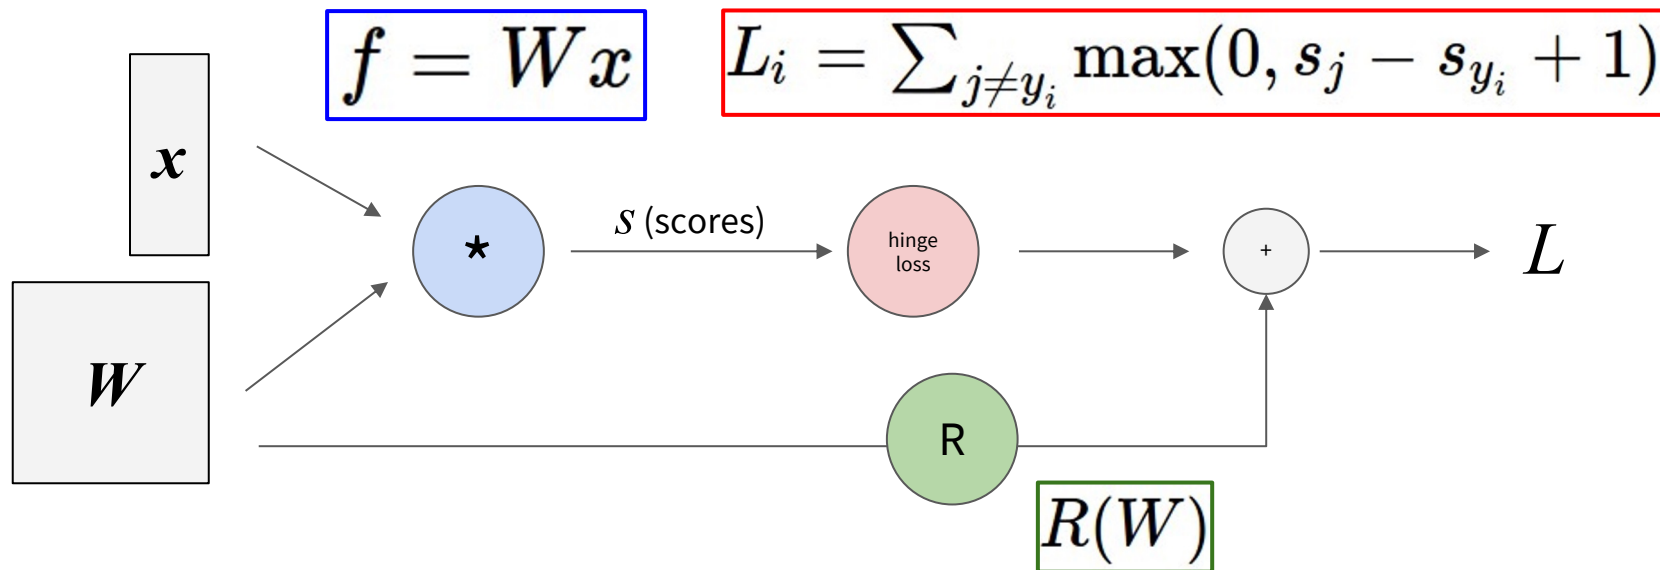

Convolutional network (AlexNet)

input image

weights

loss

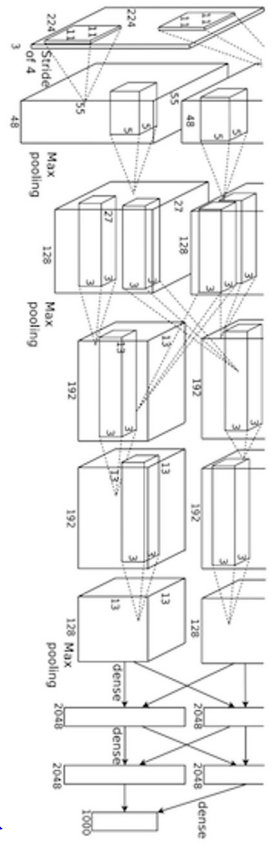


Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

Really complex neural networks!!

input image

loss

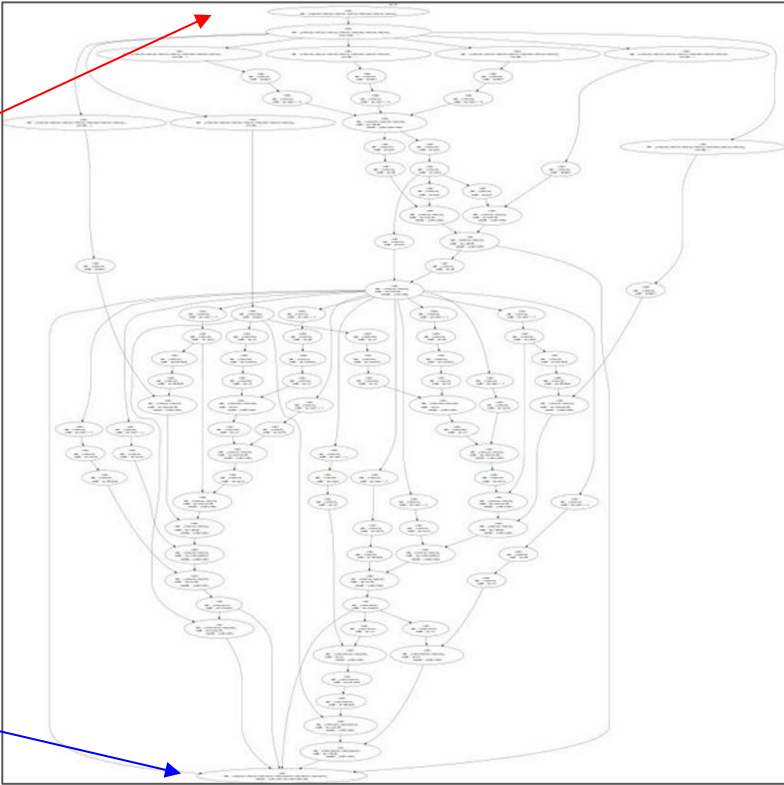


Figure reproduced with permission from a [Twitter post](#) by Andrej Karpathy.

Neural Turing Machine

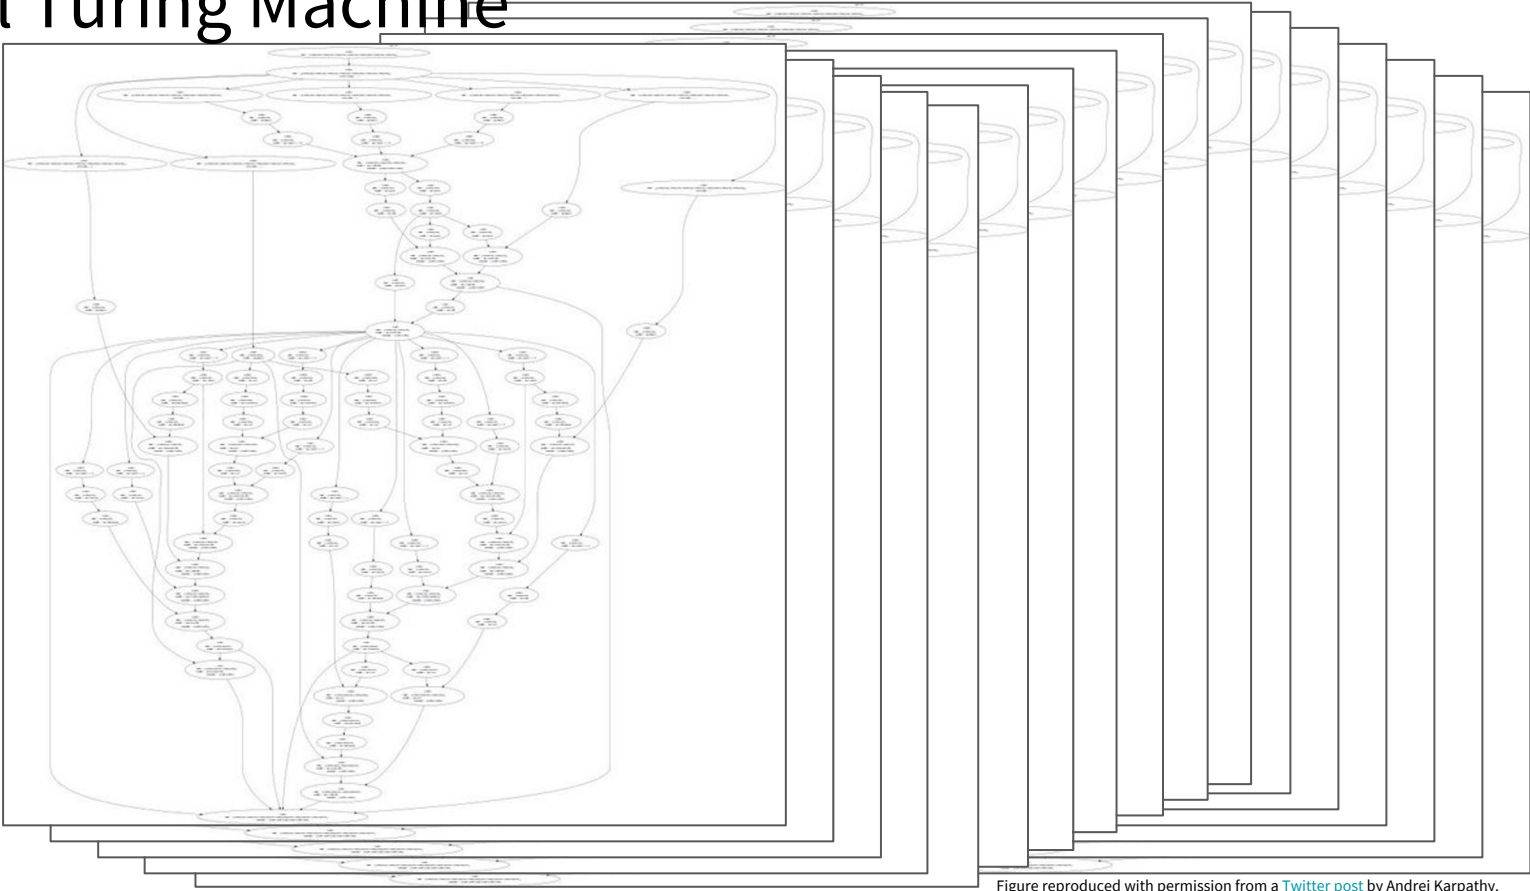


Figure reproduced with permission from a [Twitter post](#) by Andrej Karpathy.


Solution: Backpropagation

Backpropagation: a simple example

$$\underline{f(x, y, z) = (x + y)z}$$

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

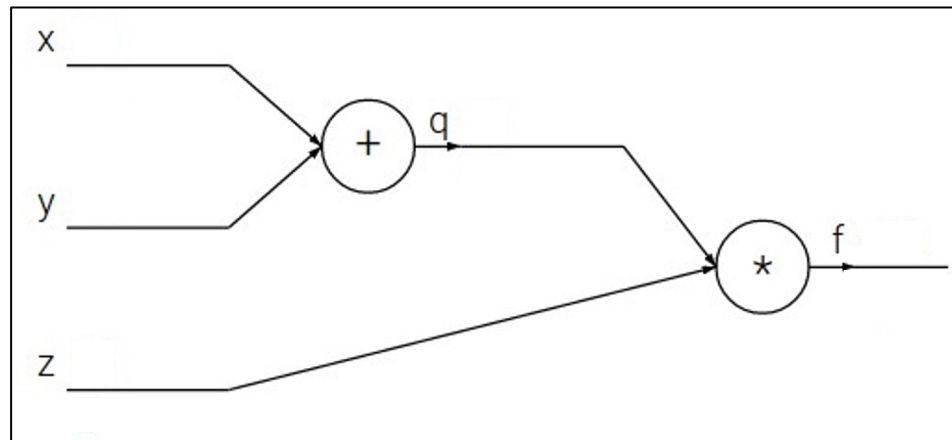

Backpropagation: a simple example

$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

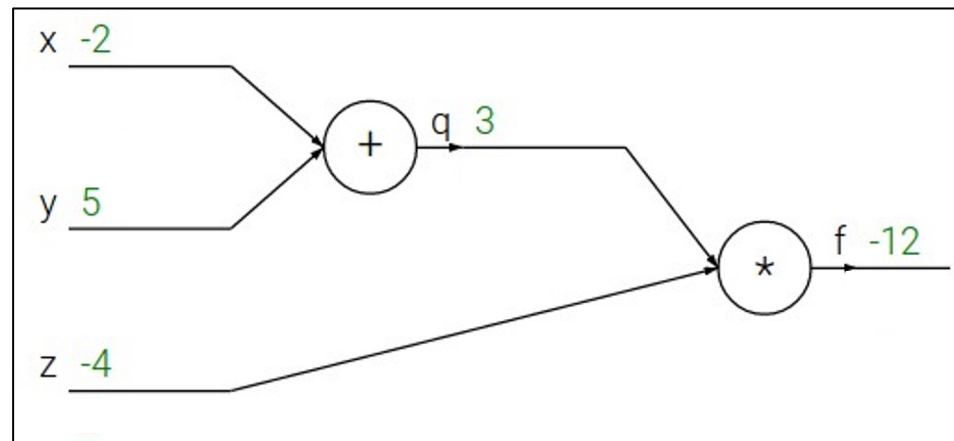


Backpropagation: a simple example

$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

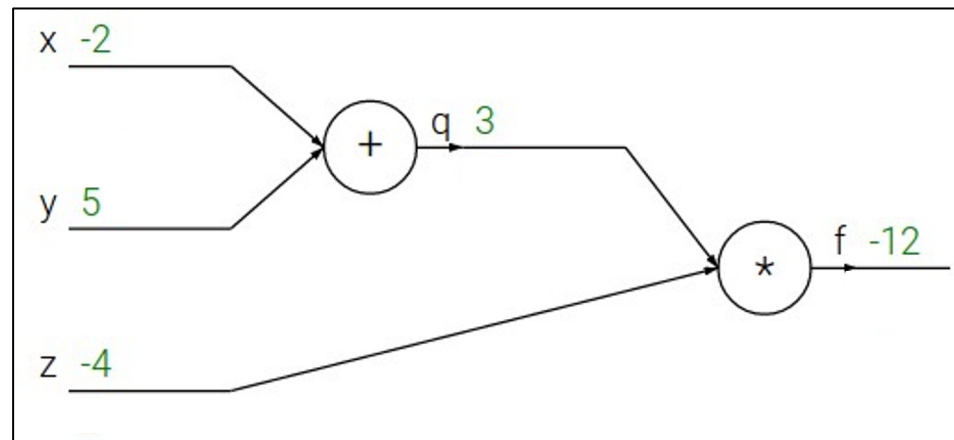


Backpropagation: a simple example

$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

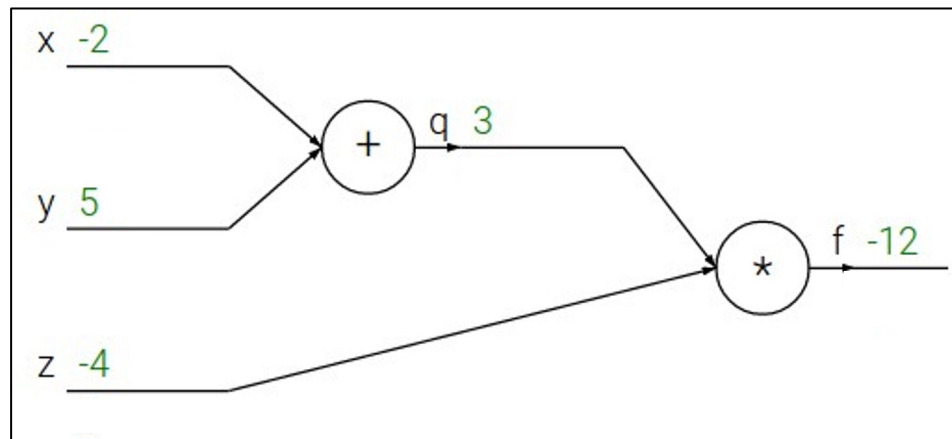

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

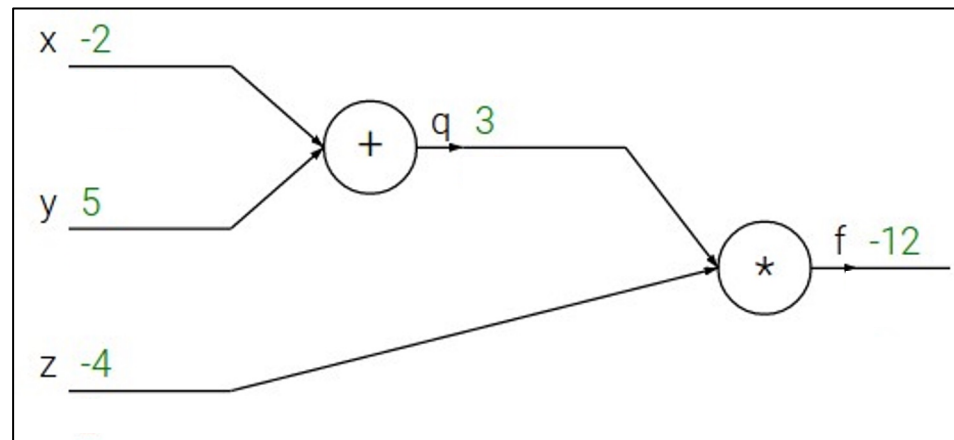

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

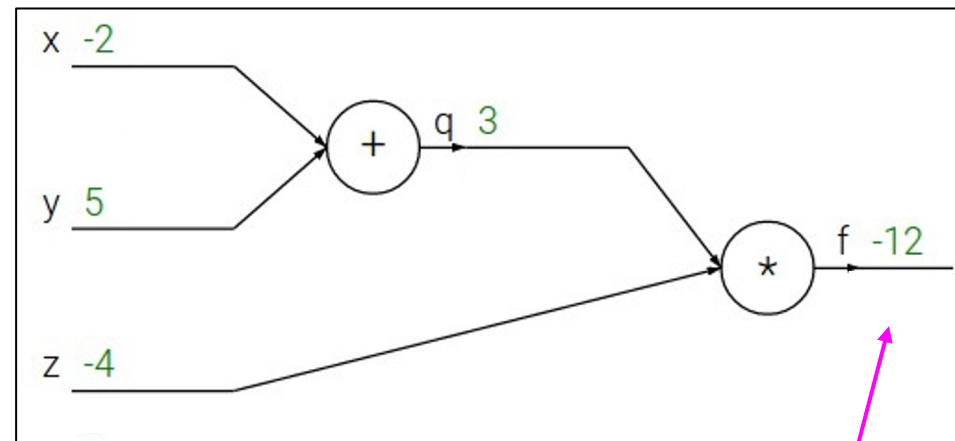

$$\frac{\partial f}{\partial f}$$

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

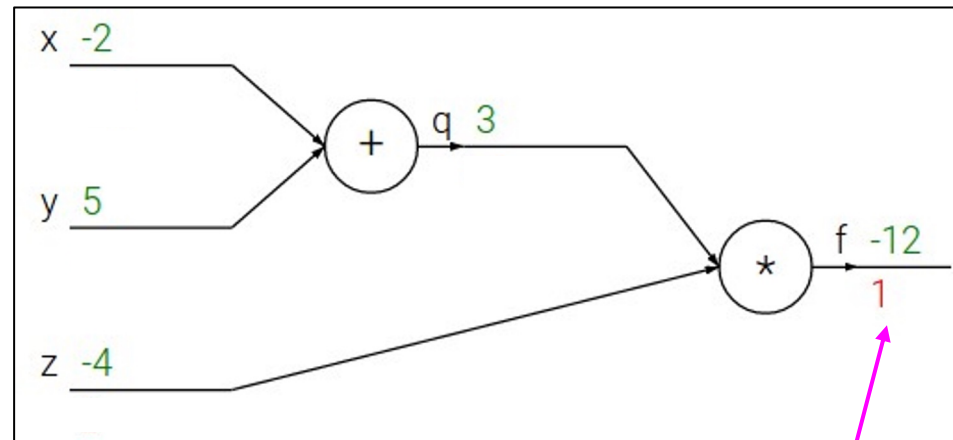

$$\frac{\partial f}{\partial f}$$

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

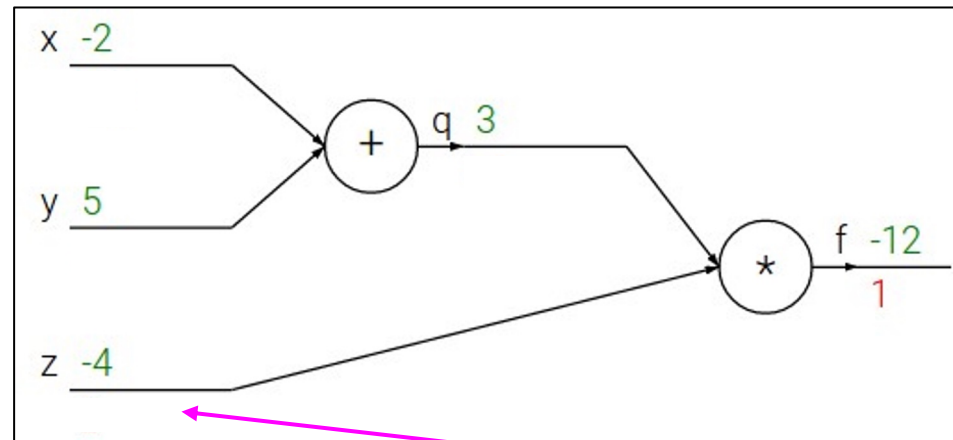

$$\frac{\partial f}{\partial z}$$

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

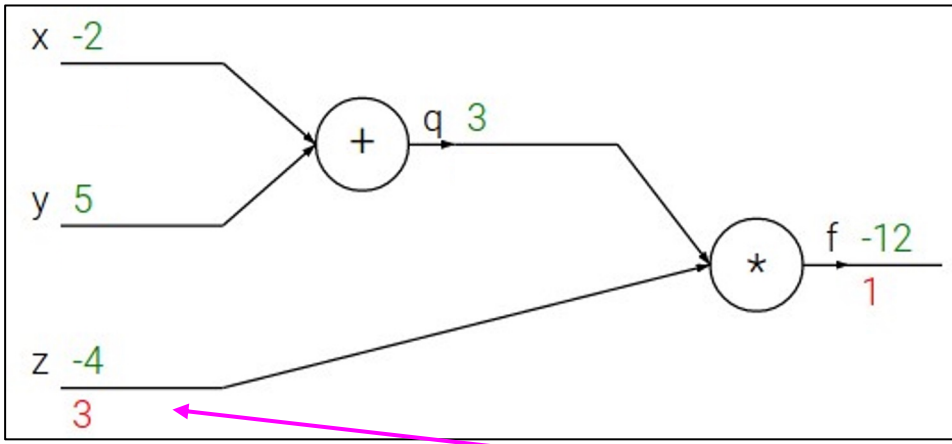

$$\frac{\partial f}{\partial z}$$

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

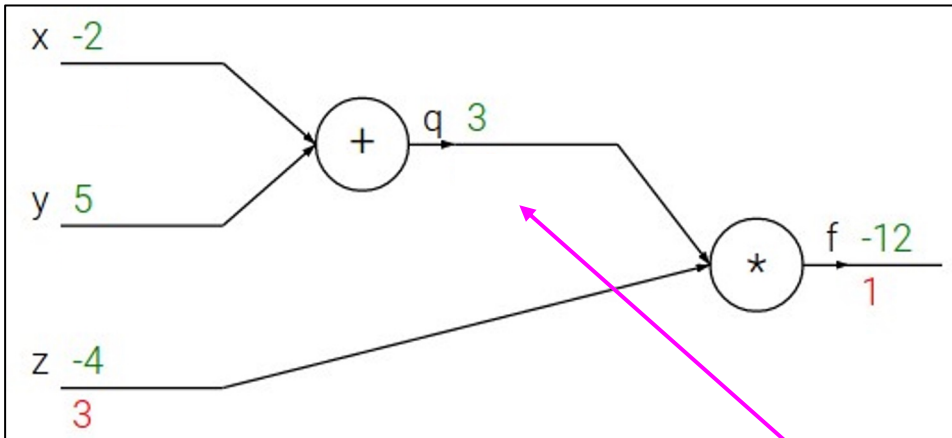

$$\frac{\partial f}{\partial q}$$

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

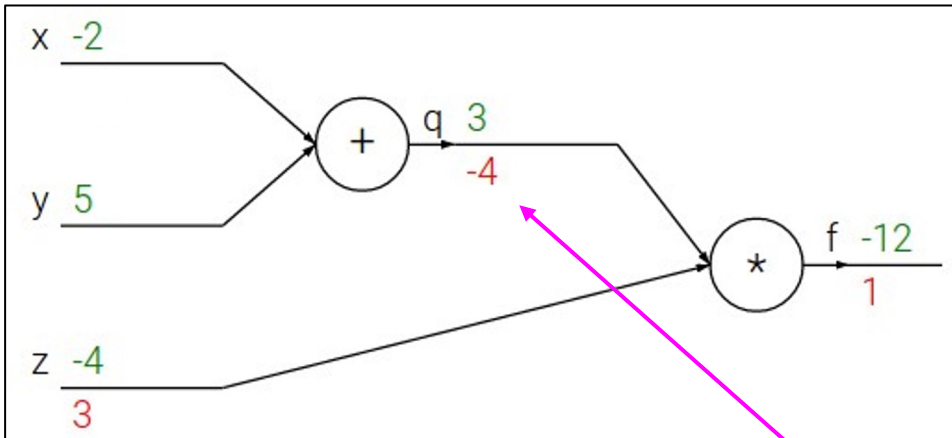

$$\frac{\partial f}{\partial q}$$

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

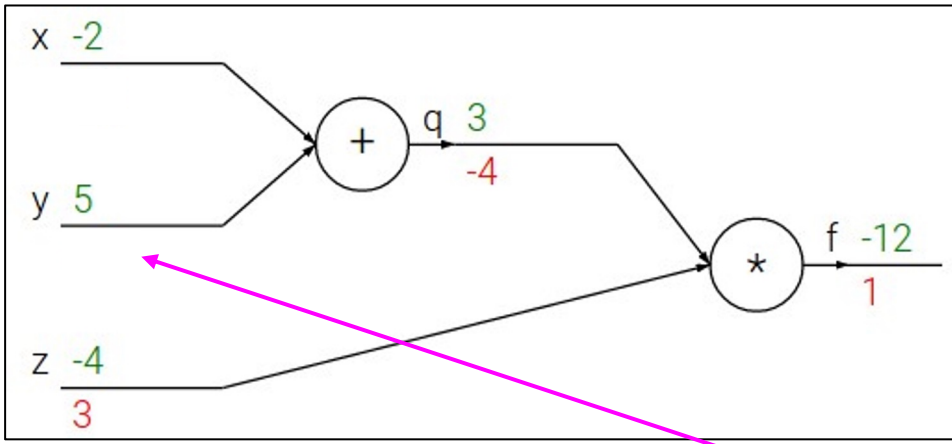

$$\frac{\partial f}{\partial y}$$

Chain rule:

$$\frac{\partial f}{\partial y} = \frac{\partial f}{\partial q} \frac{\partial q}{\partial y}$$

Upstream gradient Local gradient

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

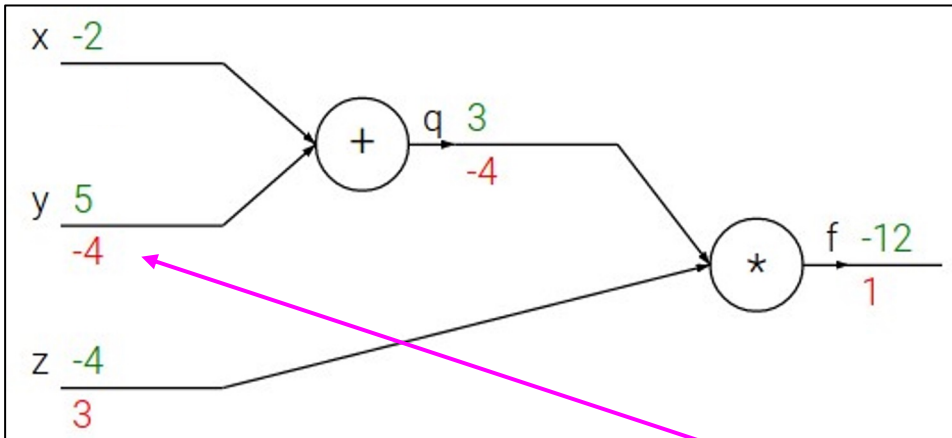

$$\frac{\partial f}{\partial y}$$

Chain rule:

$$\frac{\partial f}{\partial y} = \frac{\partial f}{\partial q} \frac{\partial q}{\partial y}$$

Upstream gradient Local gradient

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

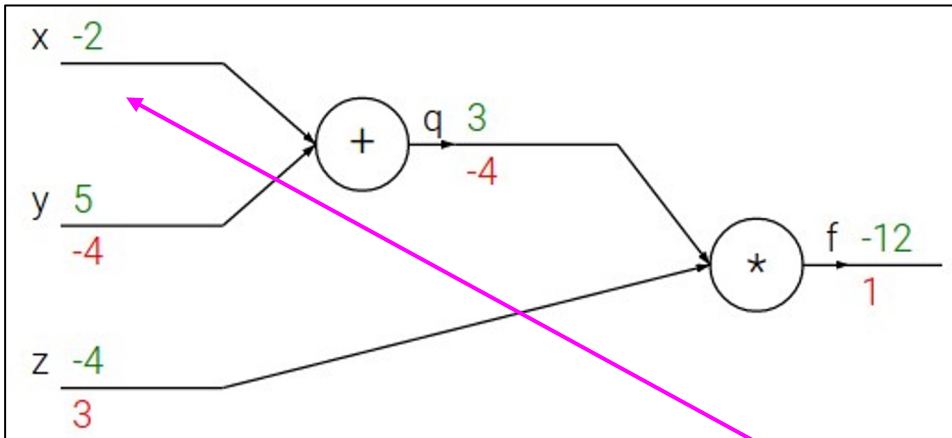

$$\frac{\partial f}{\partial x}$$

Chain rule:

$$\frac{\partial f}{\partial x} = \frac{\partial f}{\partial q} \frac{\partial q}{\partial x}$$

Upstream gradient Local gradient

Backpropagation: a simple example


$$f(x, y, z) = (x + y)z$$

e.g. $x = -2, y = 5, z = -4$

$$q = x + y \quad \frac{\partial q}{\partial x} = 1, \frac{\partial q}{\partial y} = 1$$

$$f = qz \quad \frac{\partial f}{\partial q} = z, \frac{\partial f}{\partial z} = q$$

Want: $\frac{\partial f}{\partial x}, \frac{\partial f}{\partial y}, \frac{\partial f}{\partial z}$

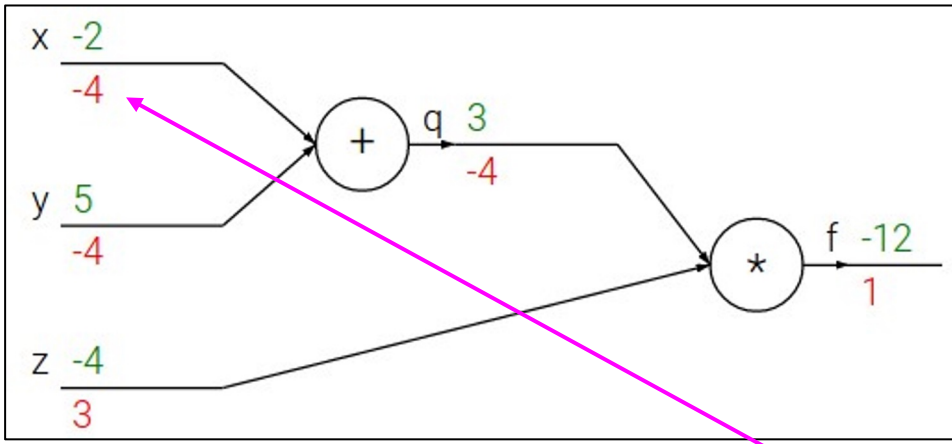



$$\frac{\partial f}{\partial x}$$


Chain rule:


$$\frac{\partial f}{\partial x} = \frac{\partial f}{\partial q} \frac{\partial q}{\partial x}$$


Upstream gradient Local gradient

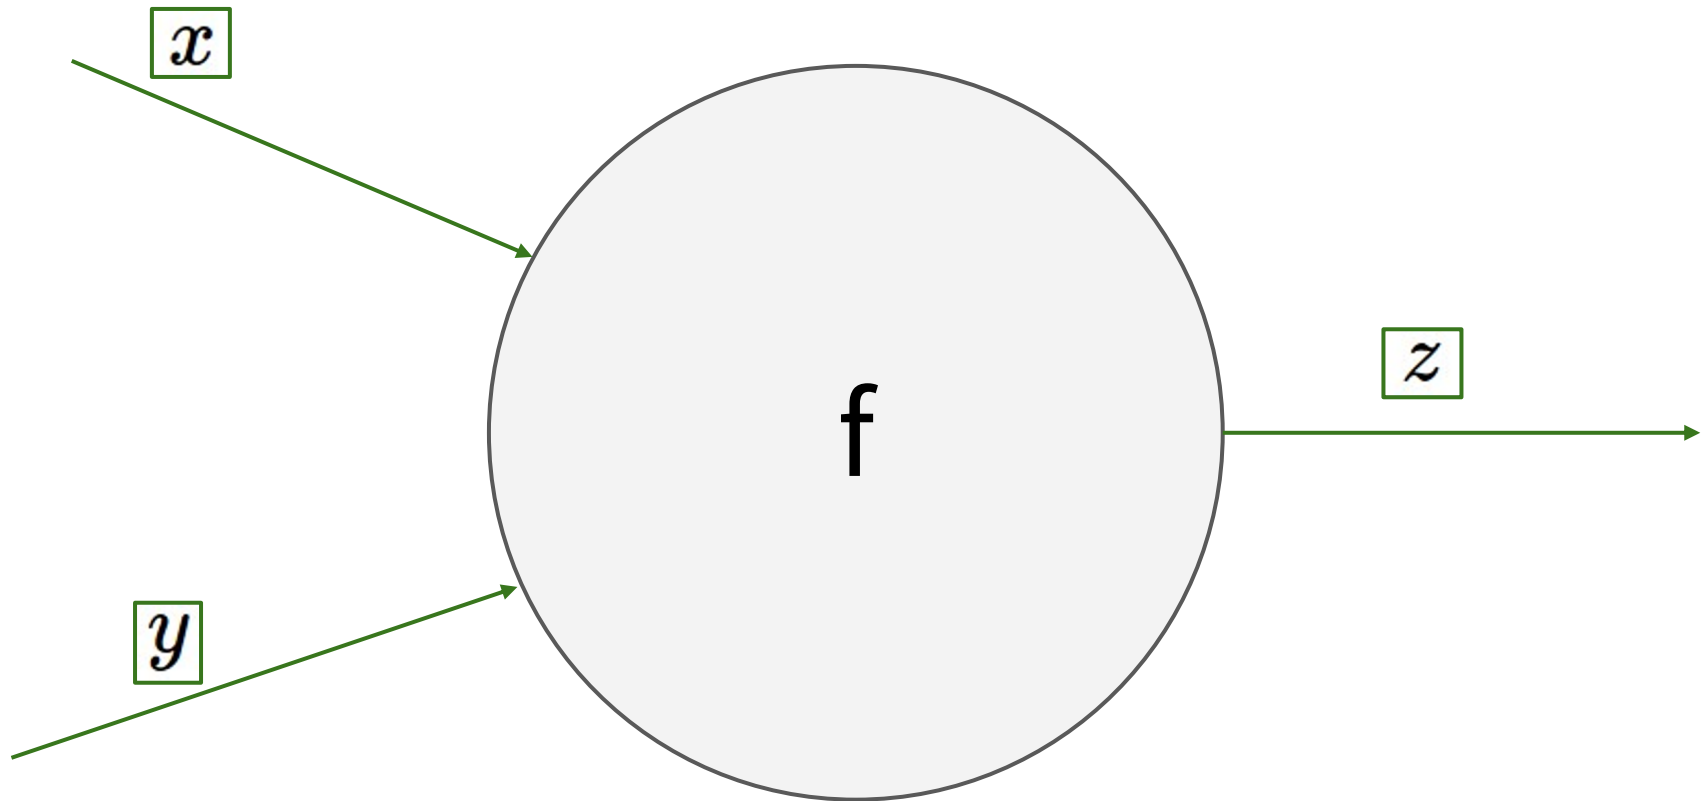


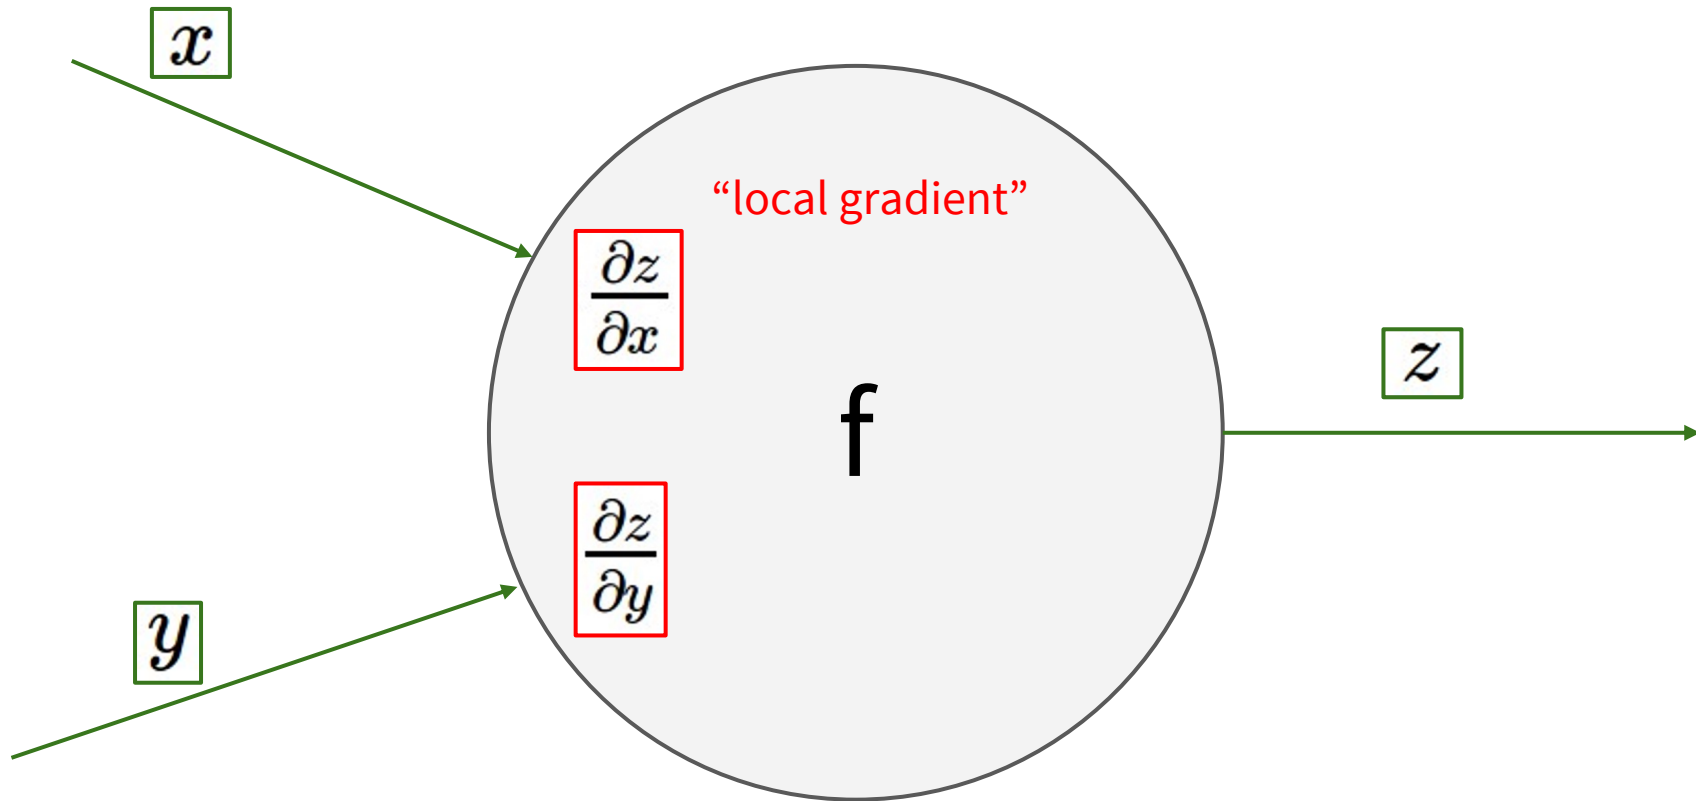

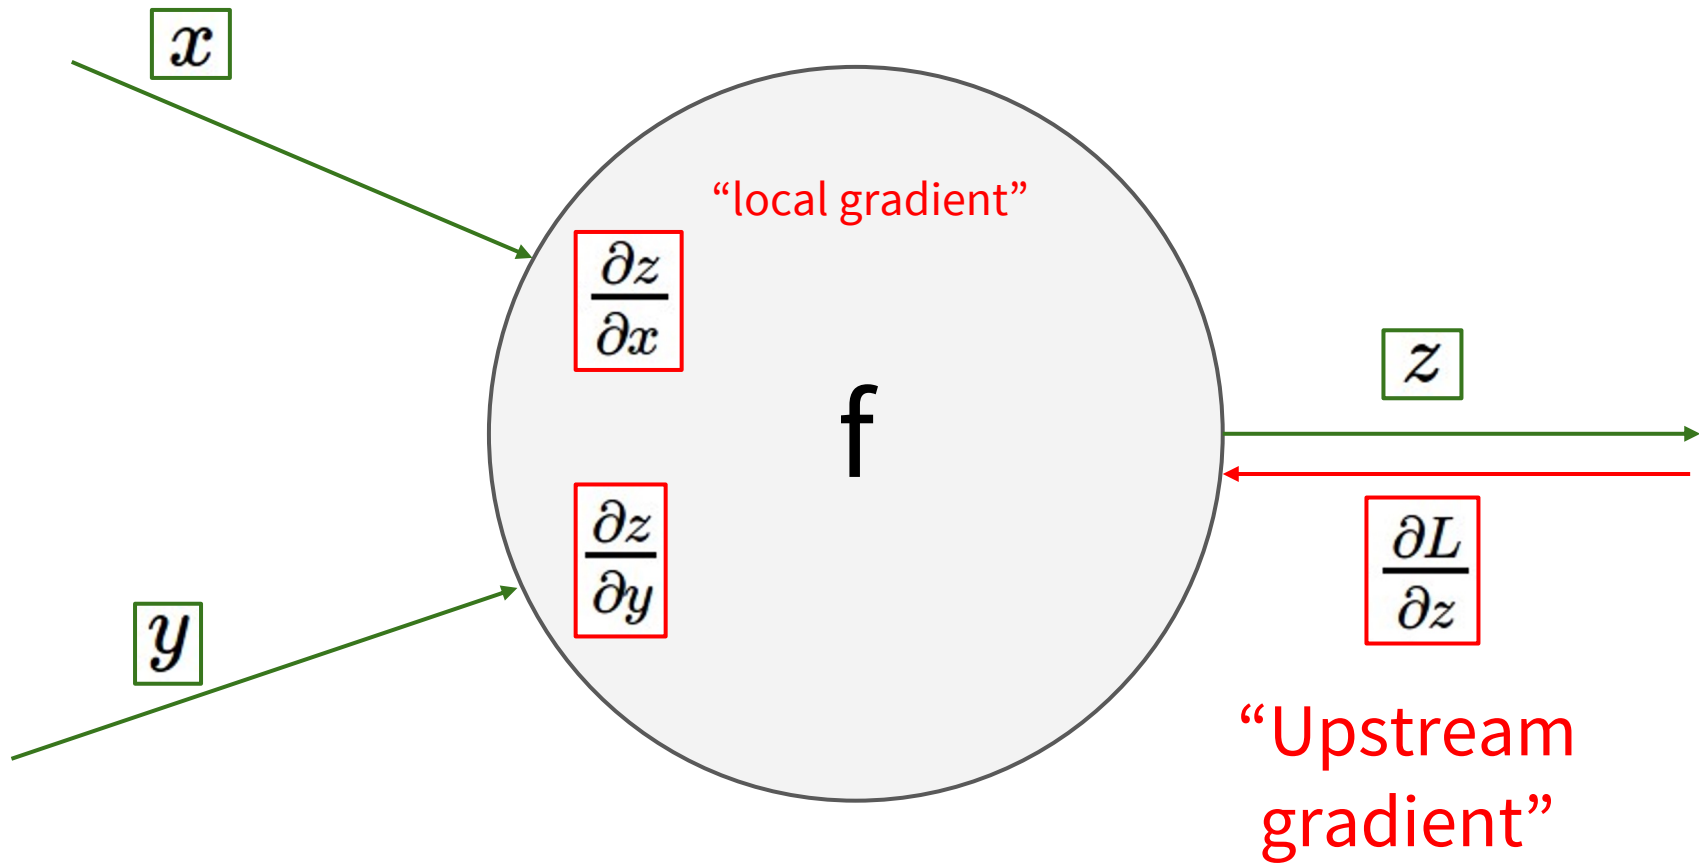

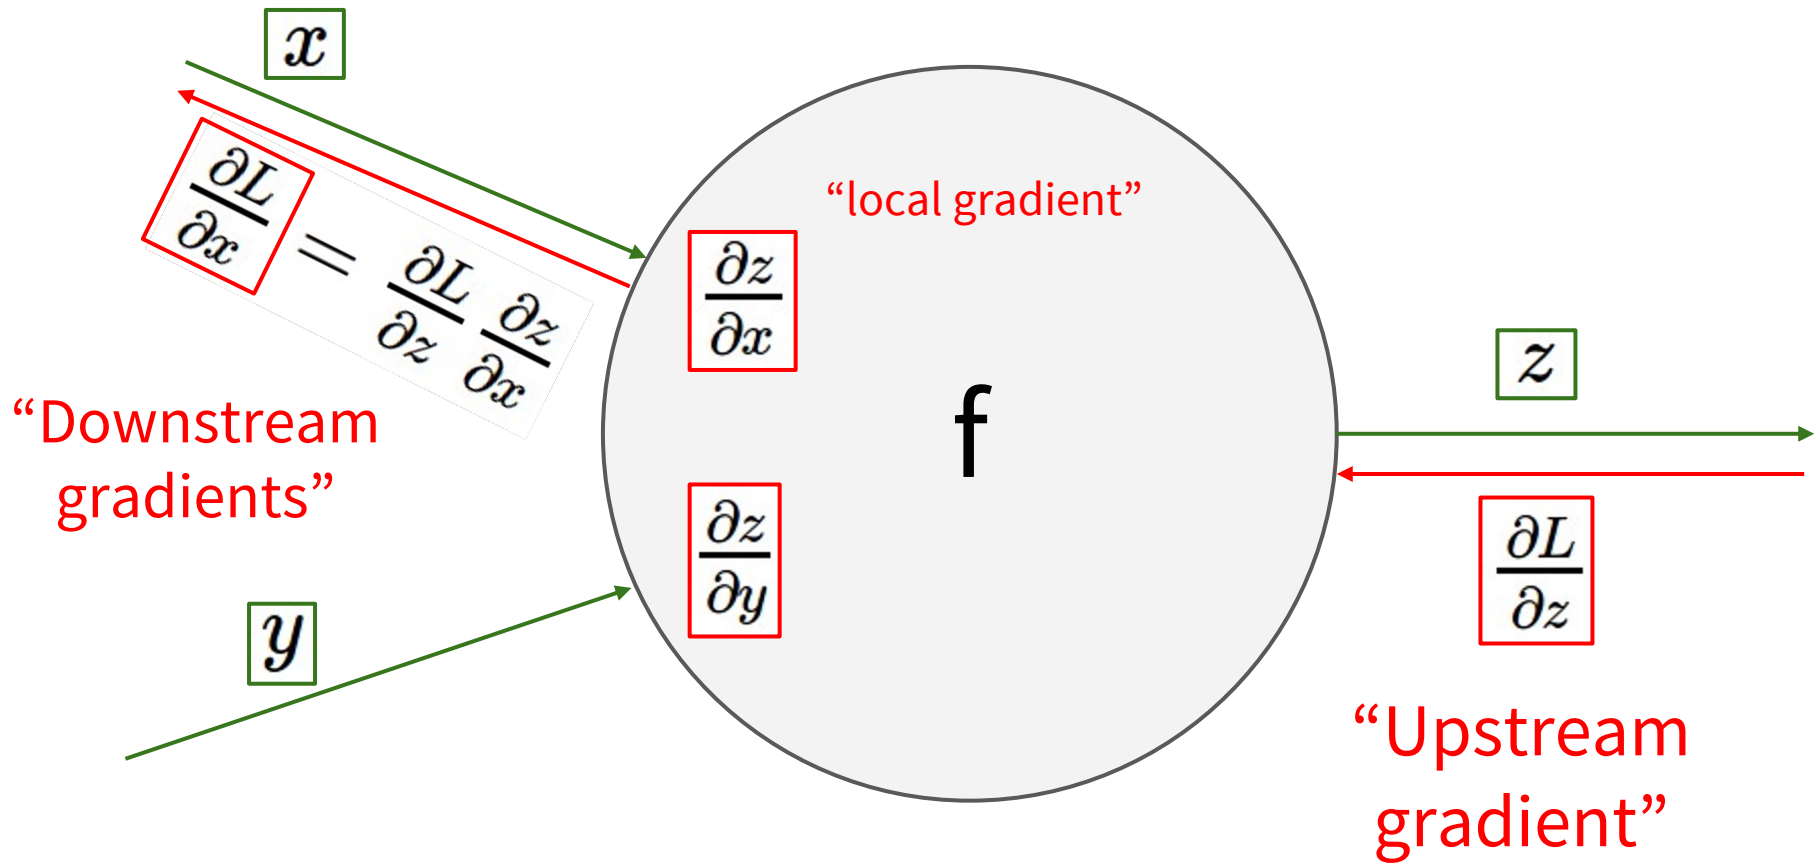


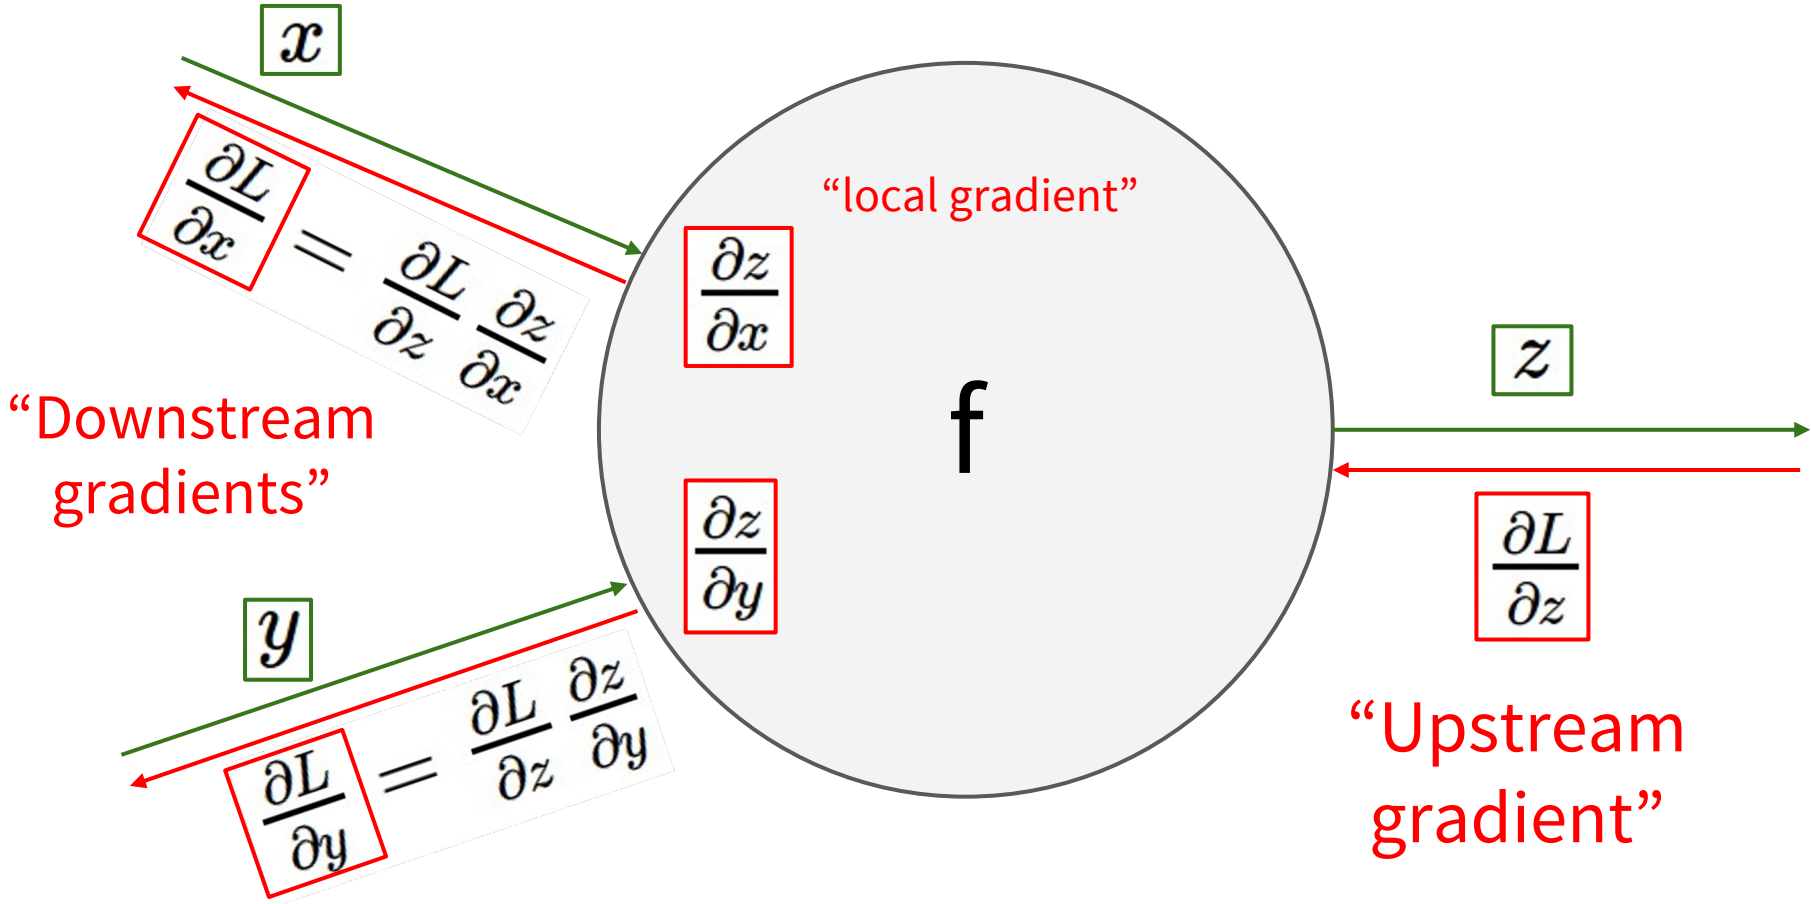

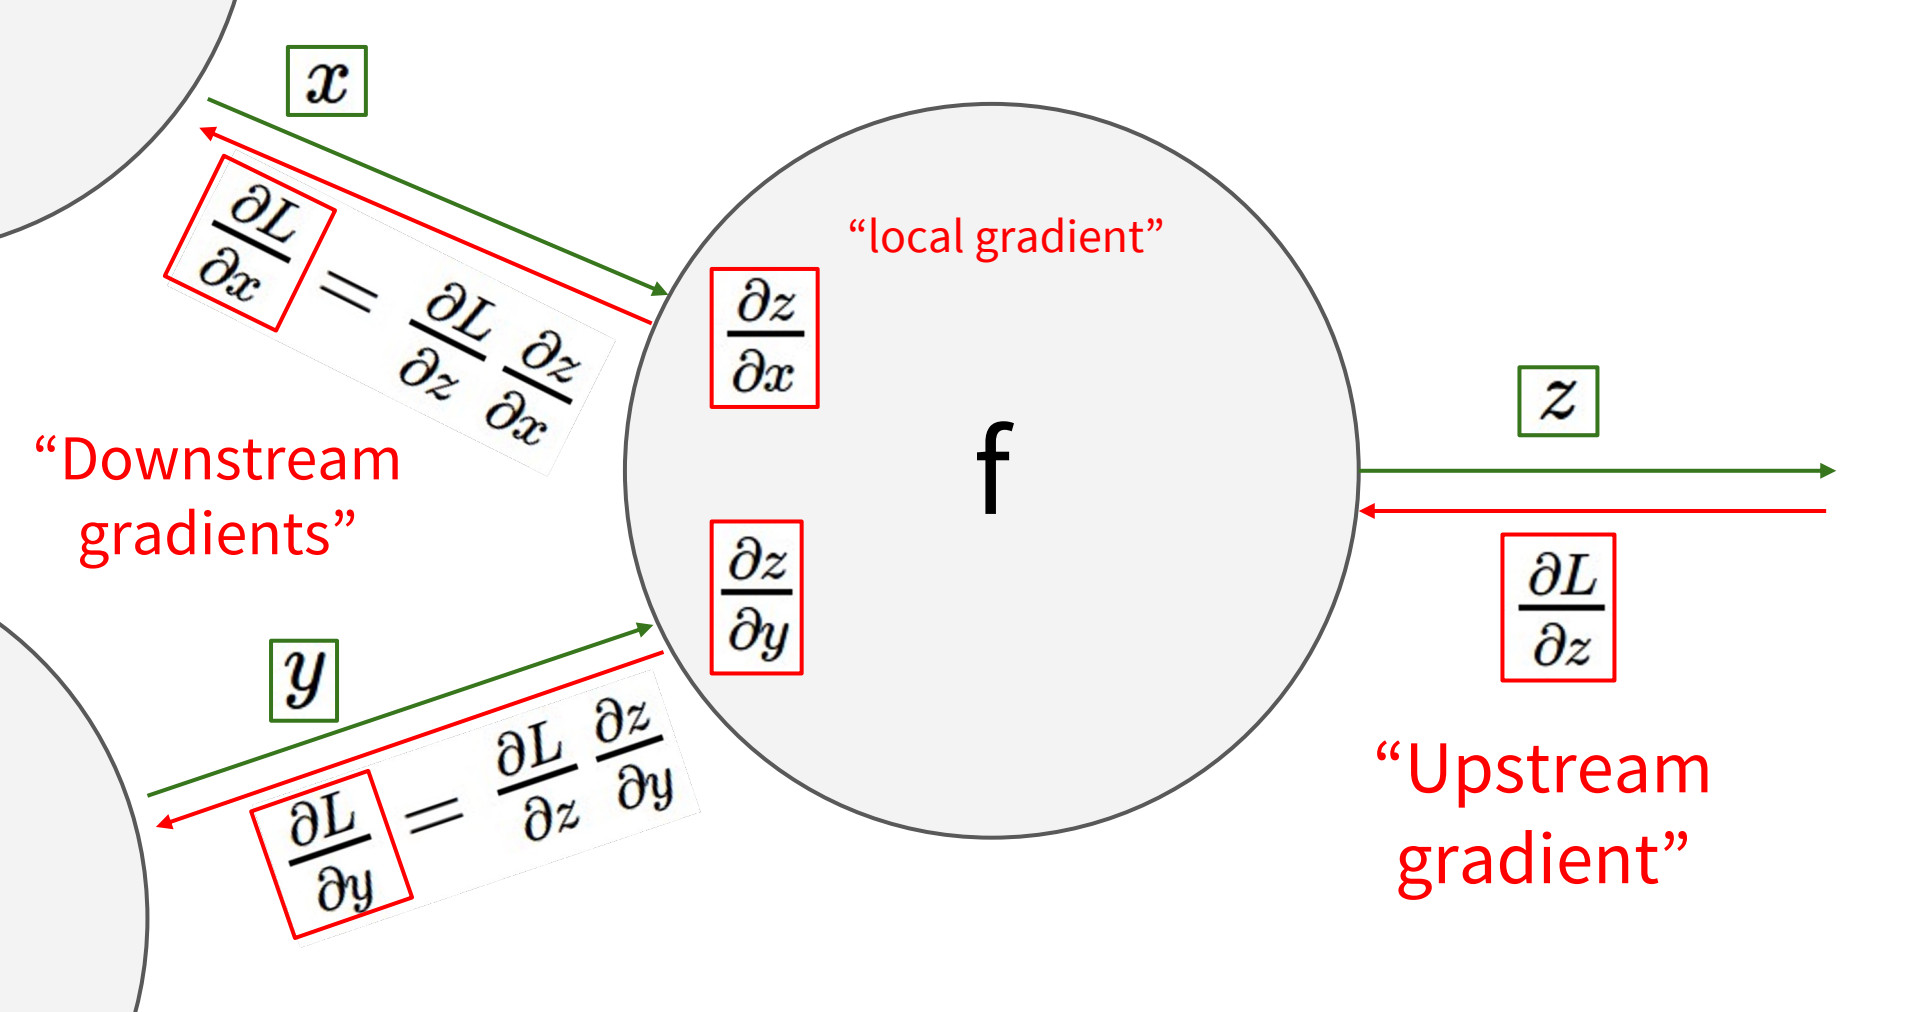


Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

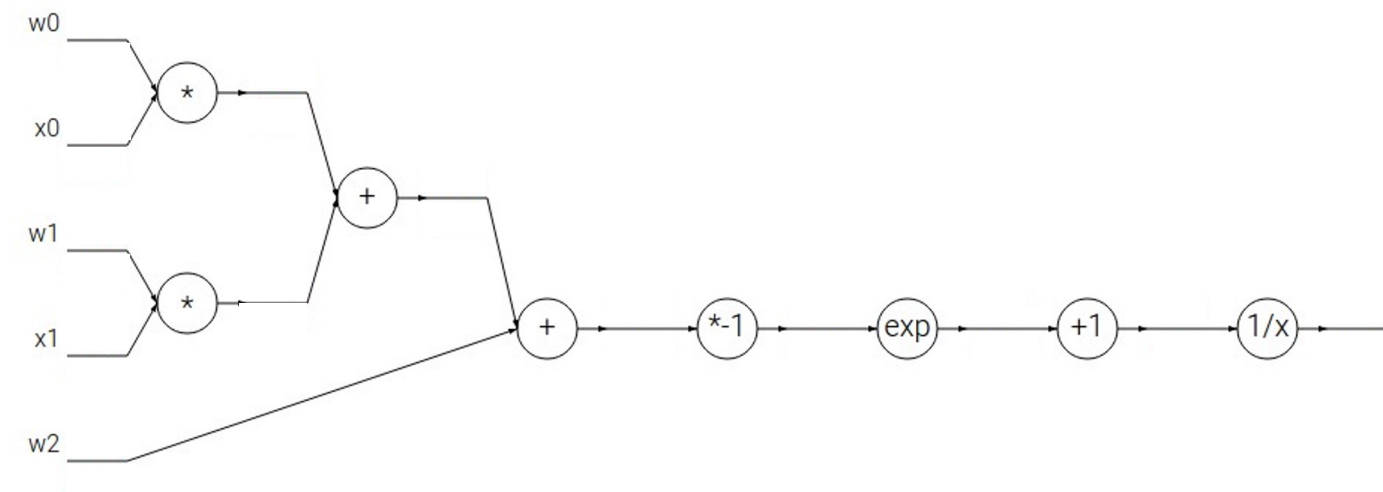


Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

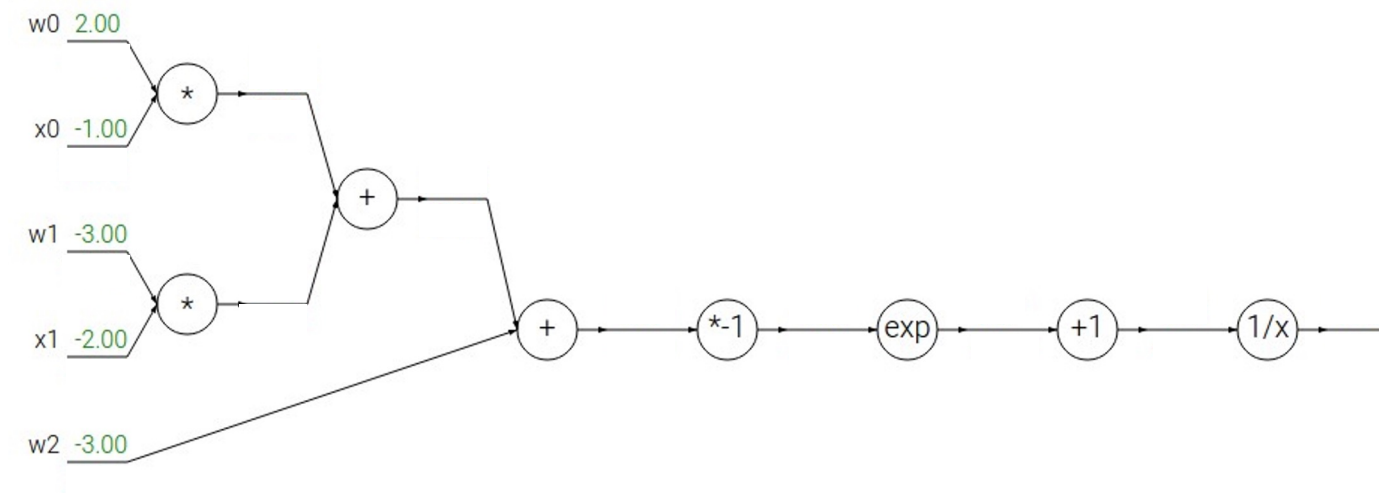


Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

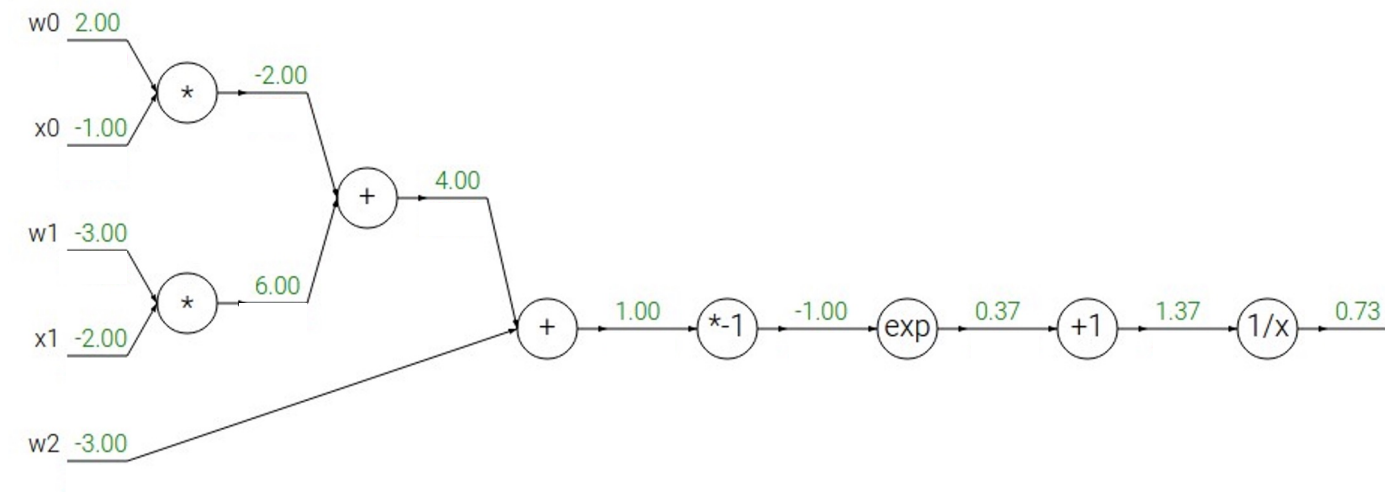

Another example:


$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

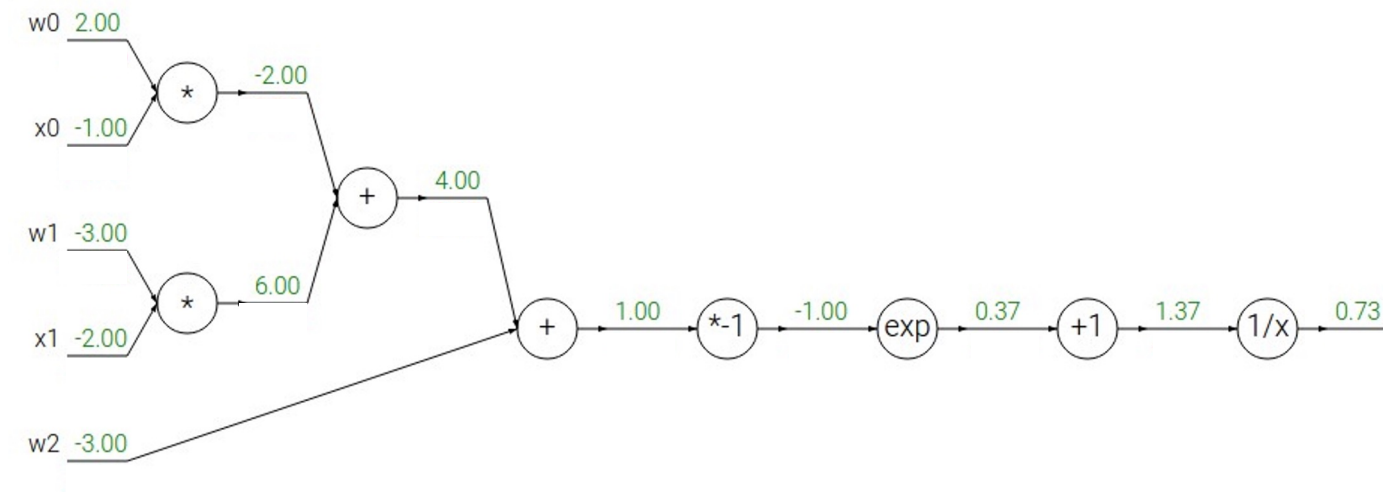

$f(x) = e^x$	\rightarrow	$\frac{df}{dx} = e^x$		$f(x) = \frac{1}{x}$	\rightarrow	$\frac{df}{dx} = -1/x^2$
$f_a(x) = ax$	\rightarrow	$\frac{df}{dx} = a$		$f_c(x) = c + x$	\rightarrow	$\frac{df}{dx} = 1$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

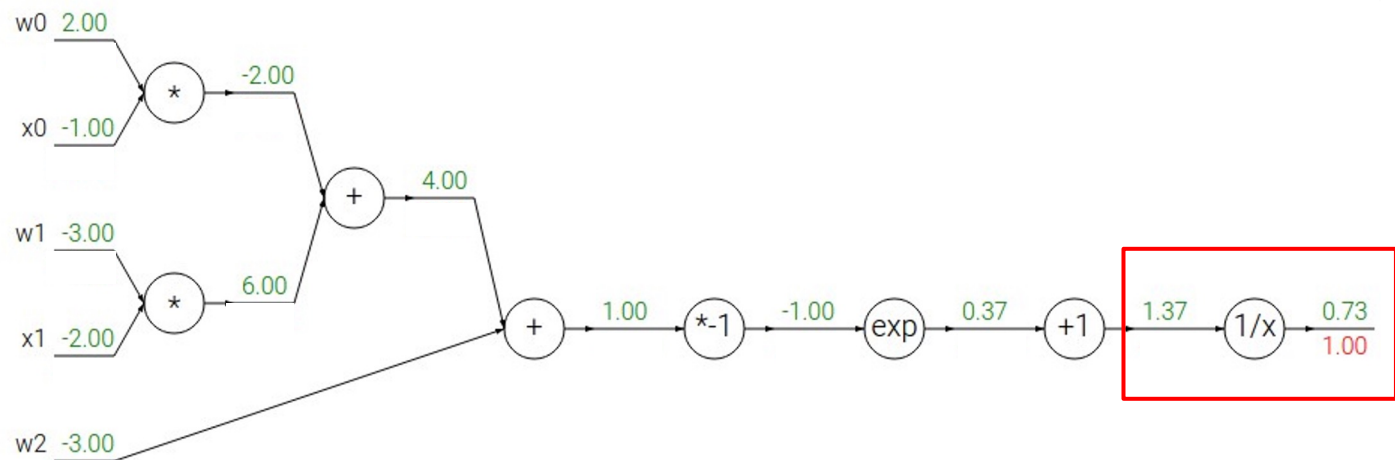

$$f(x) = e^x$$

→

$$\frac{df}{dx} = e^x$$

$$f_a(x) = ax$$

→

$$\frac{df}{dx} = a$$

$$f(x) = \frac{1}{x}$$

→

$$\frac{df}{dx} = -1/x^2$$


$$f_c(x) = c + x$$

→

$$\frac{df}{dx} = 1$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

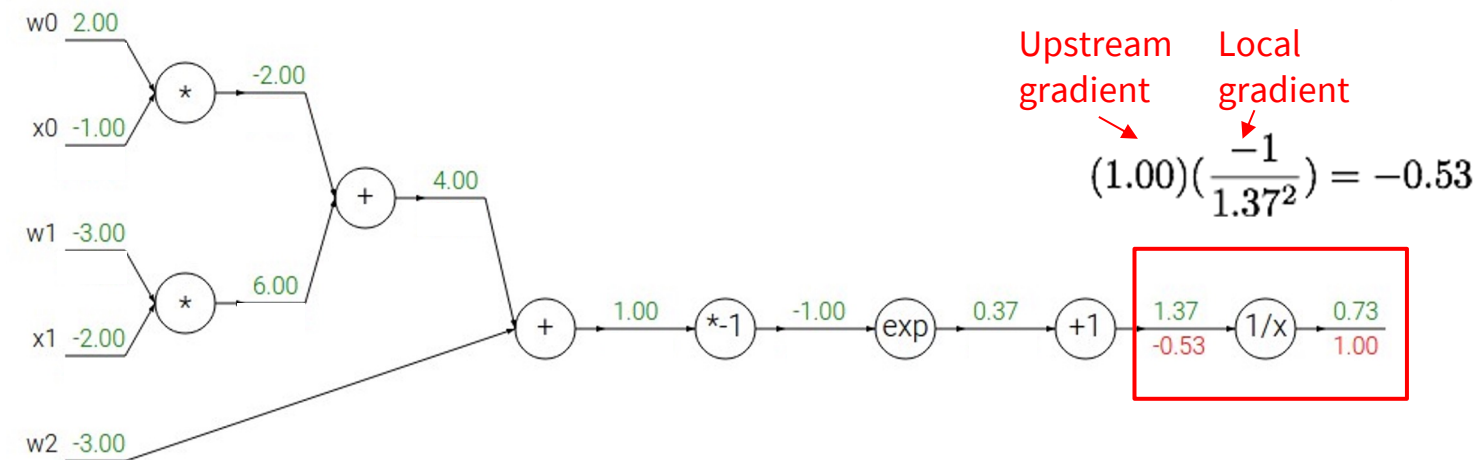

$$f(x) = e^x$$

→

$$\frac{df}{dx} = e^x$$

$$f_a(x) = ax$$

→

$$\frac{df}{dx} = a$$

$$f(x) = \frac{1}{x}$$

→

$$\frac{df}{dx} = -1/x^2$$


$$f_c(x) = c + x$$

→

$$\frac{df}{dx} = 1$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

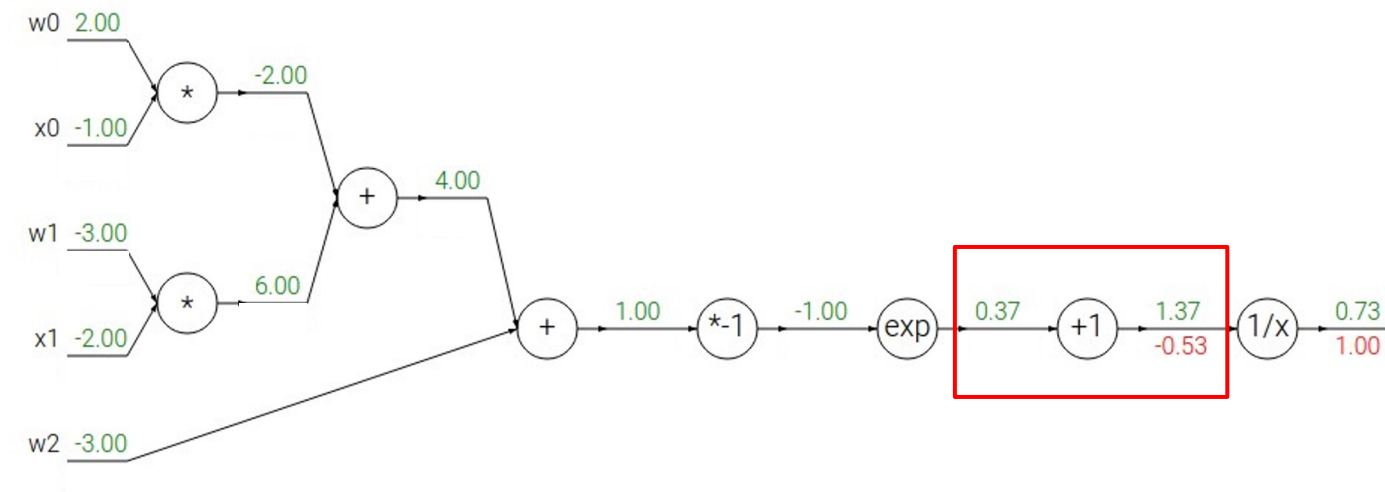

$$f(x) = e^x \quad \rightarrow \quad \frac{df}{dx} = e^x$$


$$f_a(x) = ax \quad \rightarrow \quad \frac{df}{dx} = a$$

$$f(x) = \frac{1}{x} \quad \rightarrow \quad \frac{df}{dx} = -1/x^2$$

$$f_c(x) = c + x \quad \rightarrow \quad \frac{df}{dx} = 1$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

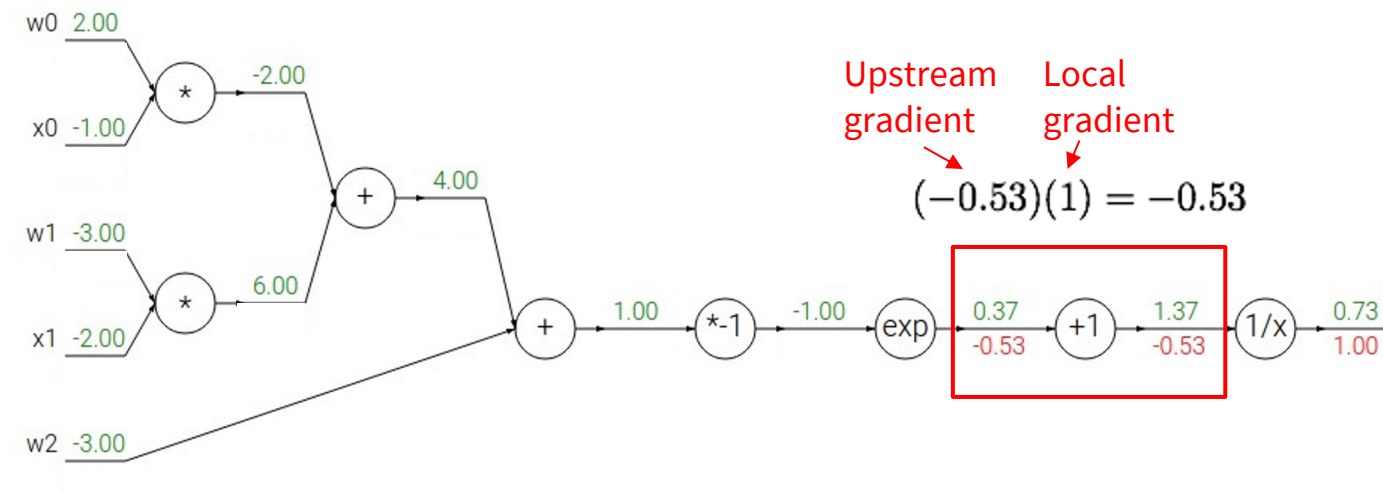


$f(x) = e^x$	\rightarrow	$\frac{df}{dx} = e^x$
$f_a(x) = ax$	\rightarrow	$\frac{df}{dx} = a$

$f(x) = \frac{1}{x}$	\rightarrow	$\frac{df}{dx} = -1/x^2$
$f_c(x) = c + x$	\rightarrow	$\frac{df}{dx} = 1$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

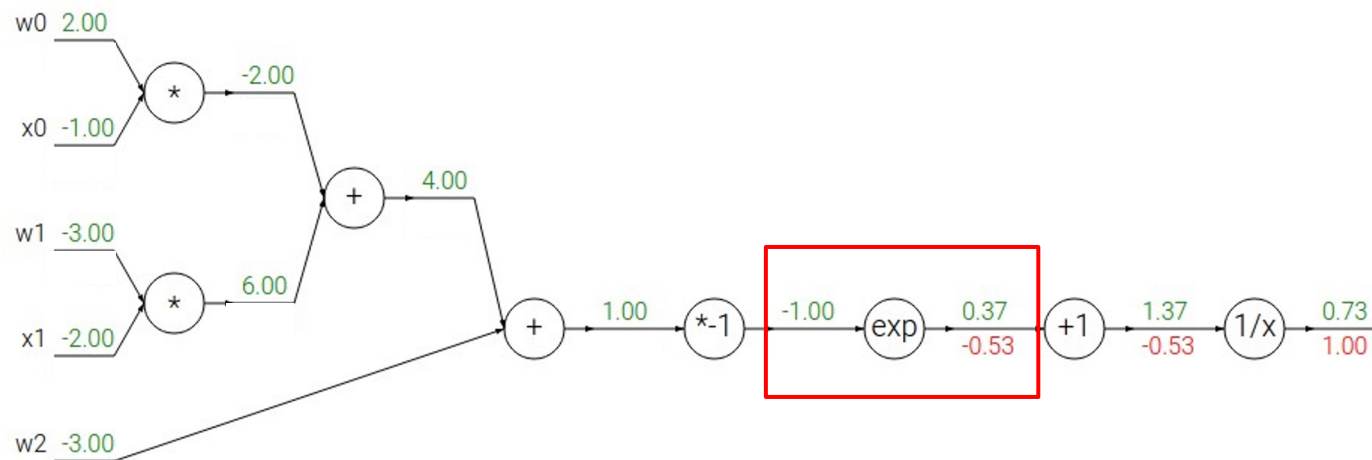

$$f(x) = e^x \quad \rightarrow \quad \frac{df}{dx} = e^x$$


$$f_a(x) = ax \quad \rightarrow \quad \frac{df}{dx} = a$$

$$f(x) = \frac{1}{x} \quad \rightarrow \quad \frac{df}{dx} = -1/x^2$$

$$f_c(x) = c + x \quad \rightarrow \quad \frac{df}{dx} = 1$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

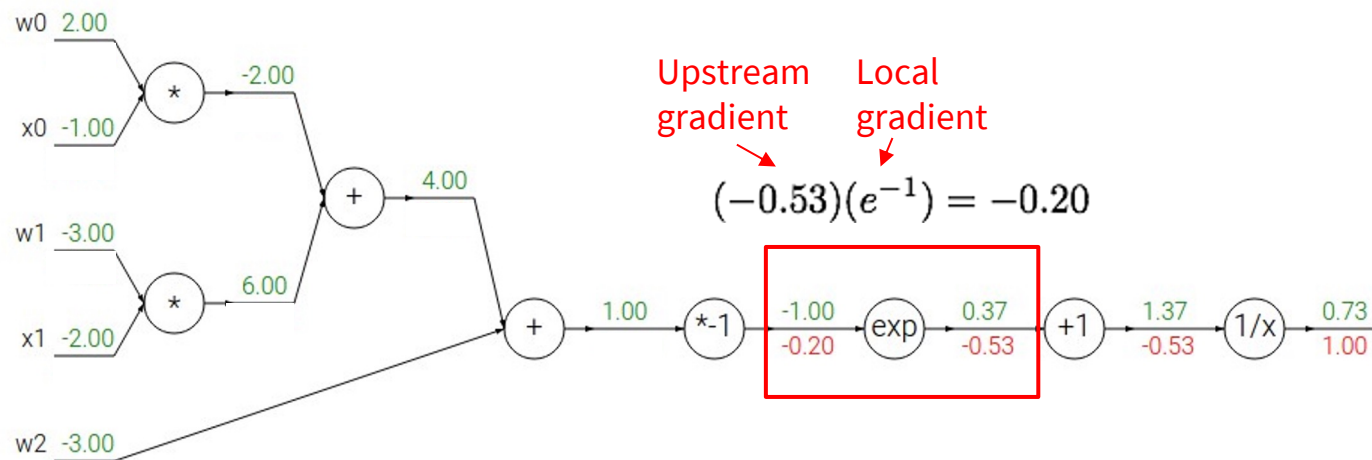

$$f(x) = e^x \quad \rightarrow \quad \frac{df}{dx} = e^x$$


$$f_a(x) = ax \quad \rightarrow \quad \frac{df}{dx} = a$$

$$f(x) = \frac{1}{x} \quad \rightarrow \quad \frac{df}{dx} = -1/x^2$$

$$f_c(x) = c + x \quad \rightarrow \quad \frac{df}{dx} = 1$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

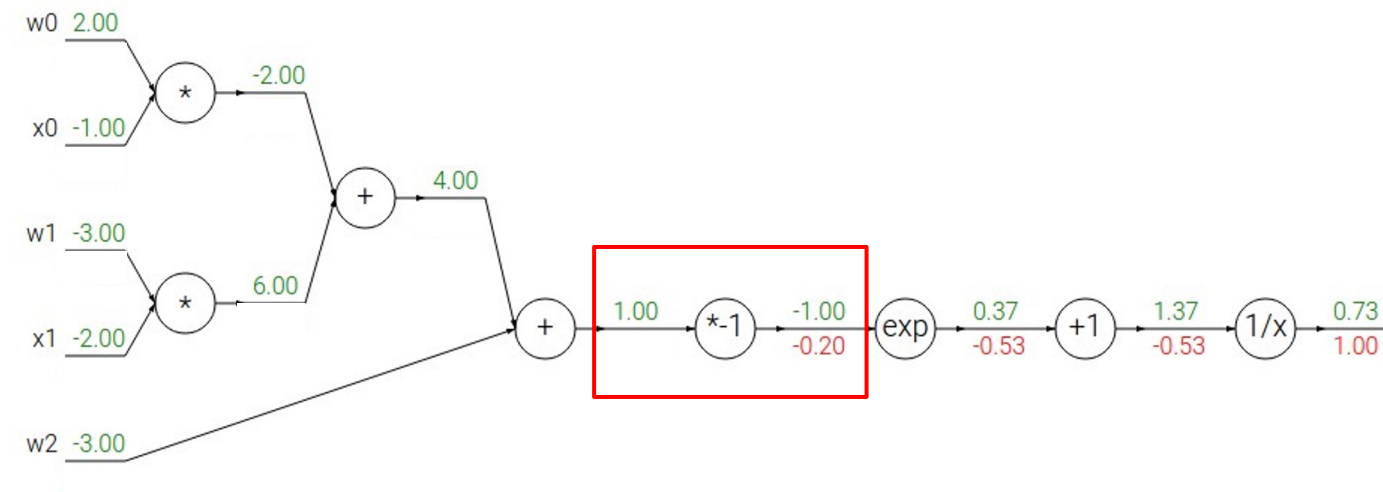

$$f(x) = e^x \quad \rightarrow \quad \frac{df}{dx} = e^x$$


$$f_a(x) = ax \quad \rightarrow \quad \frac{df}{dx} = a$$

$$f(x) = \frac{1}{x} \quad \rightarrow \quad \frac{df}{dx} = -1/x^2$$

$$f_c(x) = c + x \quad \rightarrow \quad \frac{df}{dx} = 1$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

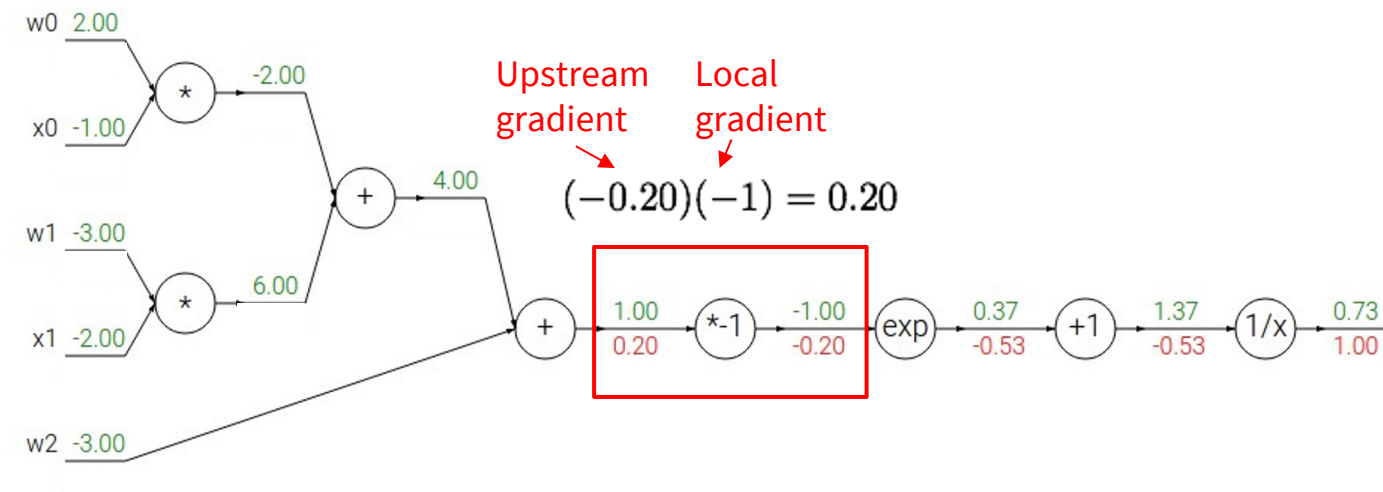

$$f(x) = e^x \quad \rightarrow \quad \frac{df}{dx} = e^x$$


$$f_a(x) = ax \quad \rightarrow \quad \frac{df}{dx} = a$$

$$f(x) = \frac{1}{x} \quad \rightarrow \quad \frac{df}{dx} = -1/x^2$$

$$f_c(x) = c + x \quad \rightarrow \quad \frac{df}{dx} = 1$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

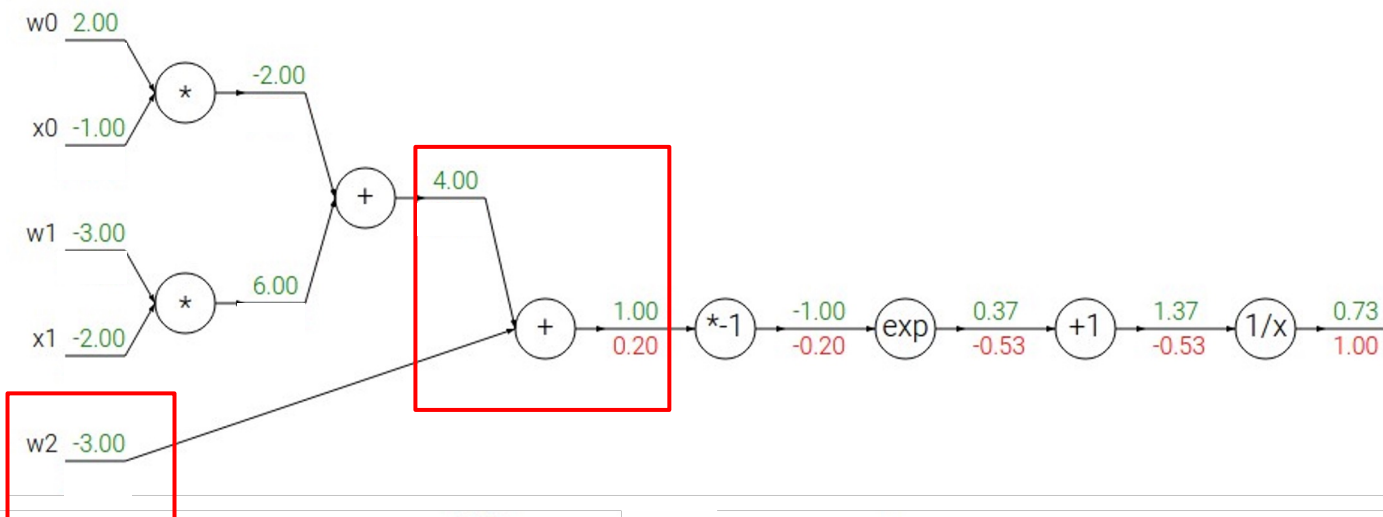

$$f(x) = e^x$$

→

$$\frac{df}{dx} = e^x$$

$$f_a(x) = ax$$

→

$$\frac{df}{dx} = a$$

$$f(x) = \frac{1}{x}$$

→

$$\frac{df}{dx} = -1/x^2$$


$$f_c(x) = c + x$$

→

$$\frac{df}{dx} = 1$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

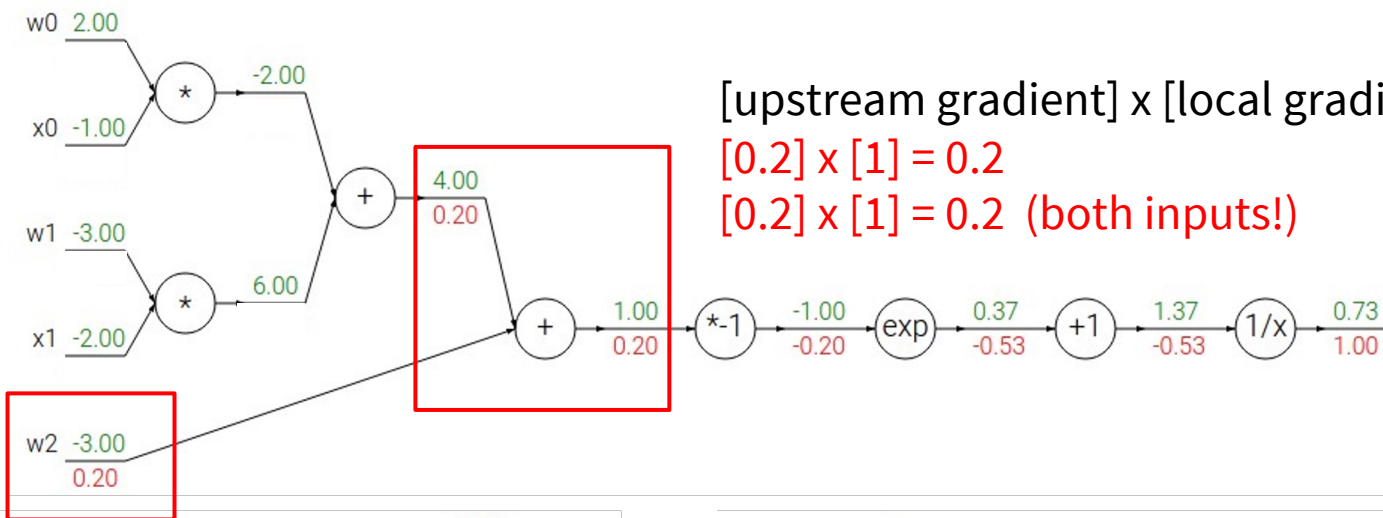

$$f(x) = e^x$$

→

$$\frac{df}{dx} = e^x$$

$$f_a(x) = ax$$

→

$$\frac{df}{dx} = a$$

$$f(x) = \frac{1}{x}$$

→

$$\frac{df}{dx} = -1/x^2$$


$$f_c(x) = c + x$$

→

$$\frac{df}{dx} = 1$$

Another example:


$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

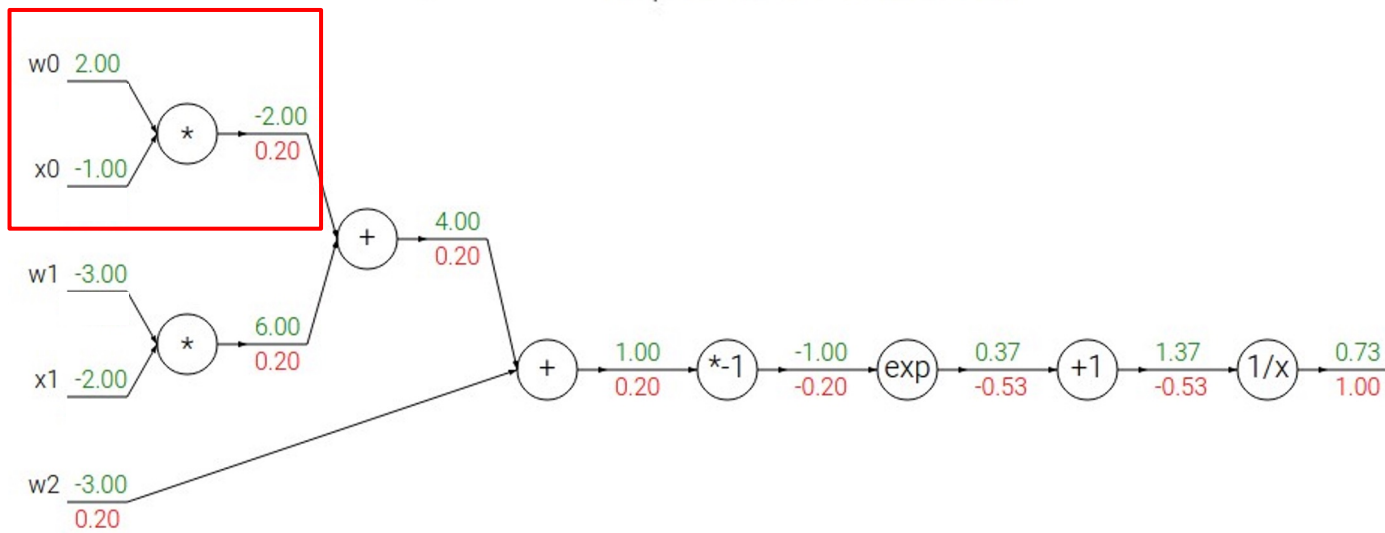

$f(x) = e^x$	\rightarrow	$\frac{df}{dx} = e^x$	 	$f(x) = \frac{1}{x}$	\rightarrow	$\frac{df}{dx} = -1/x^2$
$f_a(x) = ax$	\rightarrow	$\frac{df}{dx} = a$		$f_c(x) = c + x$	\rightarrow	$\frac{df}{dx} = 1$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

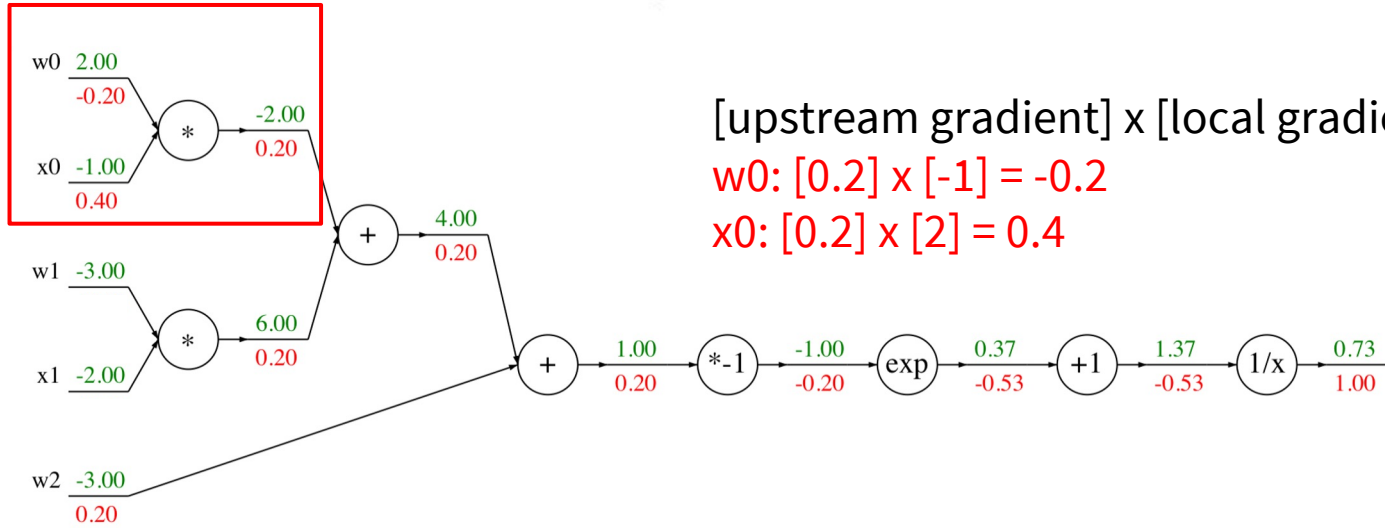

$$f(x) = e^x \rightarrow \frac{df}{dx} = e^x$$

$$f_a(x) = ax \rightarrow \frac{df}{dx} = a$$


$$f(x) = \frac{1}{x} \rightarrow \frac{df}{dx} = -1/x^2$$

$$f_c(x) = c + x \rightarrow \frac{df}{dx} = 1$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$


Computational graph representation may not be unique. Choose one where local gradients at each node can be easily expressed!

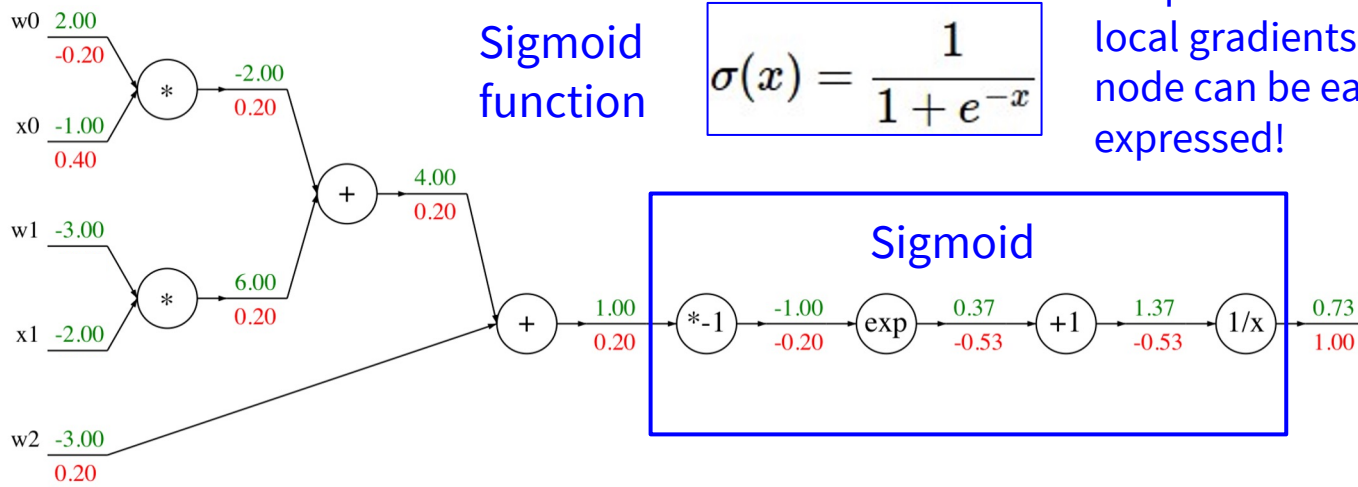

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

Computational graph representation may not be unique. Choose one where local gradients at each node can be easily expressed!

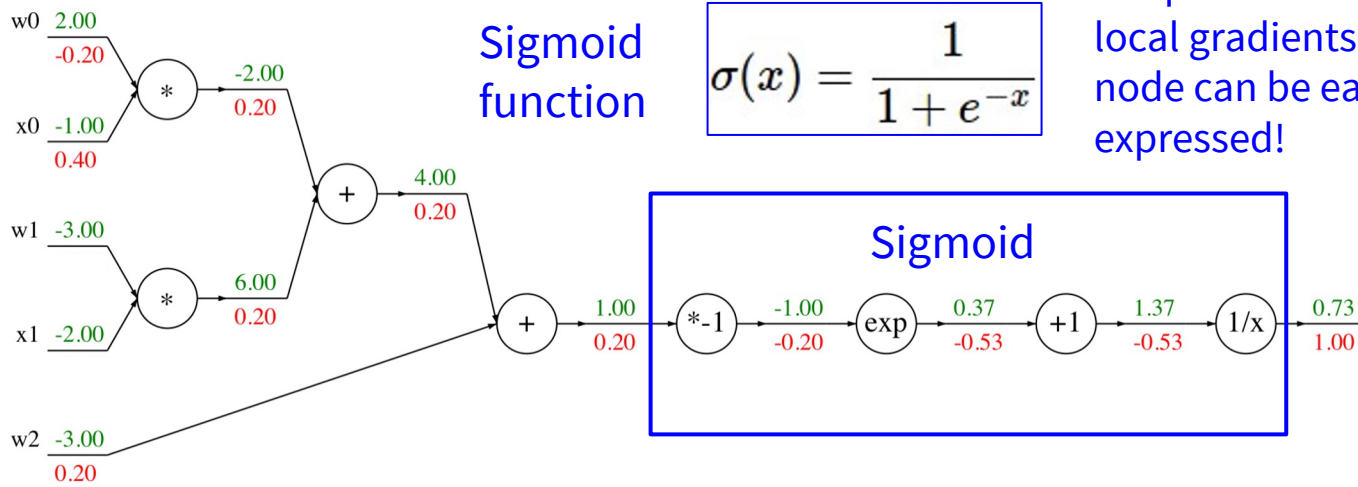


Sigmoid local gradient:

$$\frac{d\sigma(x)}{dx} = \frac{e^{-x}}{(1 + e^{-x})^2} = \left(\frac{1 + e^{-x} - 1}{1 + e^{-x}} \right) \left(\frac{1}{1 + e^{-x}} \right) = (1 - \sigma(x))\sigma(x)$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2)}}$$

Computational graph representation may not be unique. Choose one where local gradients at each node can be easily expressed!

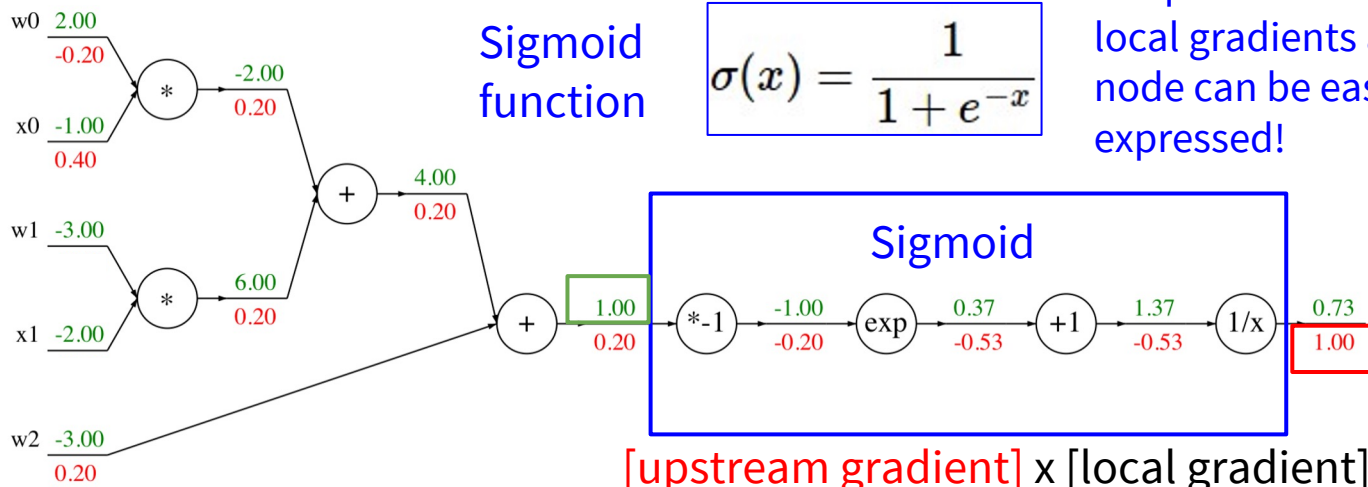

Sigmoid function

$$\sigma(x) = \frac{1}{1 + e^{-x}}$$

[upstream gradient] x [local gradient]
 [1.00] x [(1 - 1/(1+e⁻¹)) (1/(1+e⁻¹))] = 0.2


Sigmoid local gradient:

$$\frac{d\sigma(x)}{dx} = \frac{e^{-x}}{(1 + e^{-x})^2} = \left(\frac{1 + e^{-x} - 1}{1 + e^{-x}} \right) \left(\frac{1}{1 + e^{-x}} \right) = (1 - \sigma(x)) \sigma(x)$$

Another example:

$$f(w, x) = \frac{1}{1 + e^{-(w_0x_0 + w_1x_1 + w_2x_2)}}$$

Computational graph representation may not be unique. Choose one where local gradients at each node can be easily expressed!

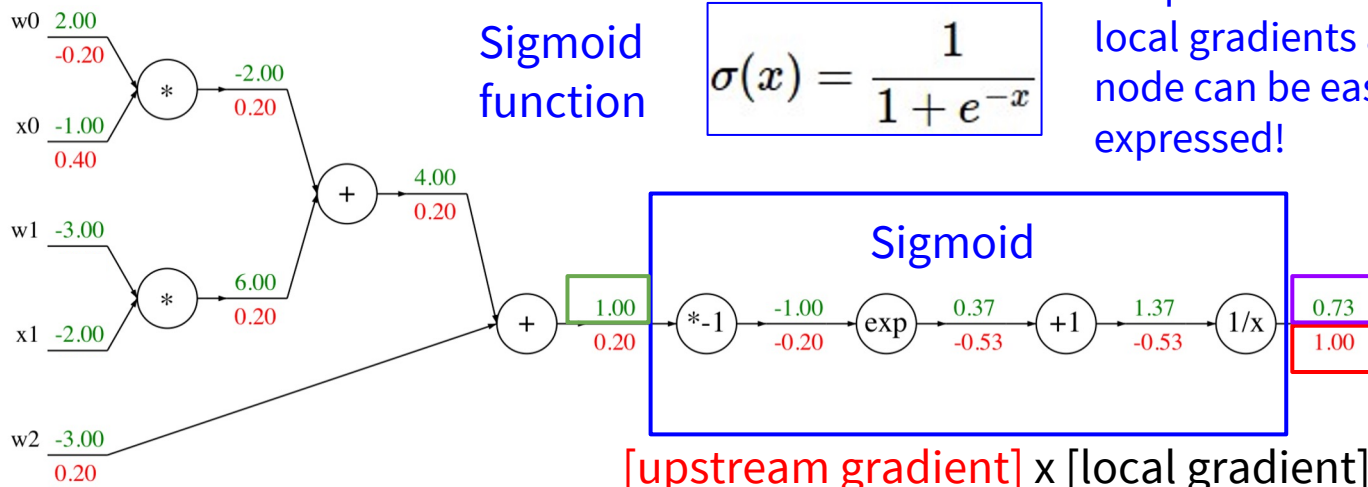


Sigmoid local gradient:

$$\frac{d\sigma(x)}{dx} = \frac{e^{-x}}{(1 + e^{-x})^2} = \left(\frac{1 + e^{-x} - 1}{1 + e^{-x}} \right) \left(\frac{1}{1 + e^{-x}} \right) = (1 - \sigma(x)) \sigma(x)$$


Patterns in gradient flow

add gate: gradient distributor

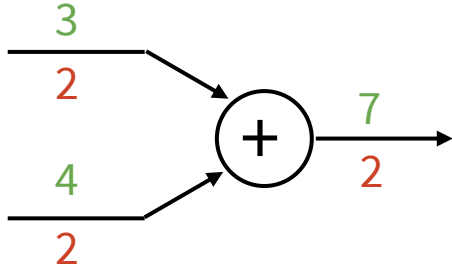


Patterns in gradient flow

add gate: gradient distributor

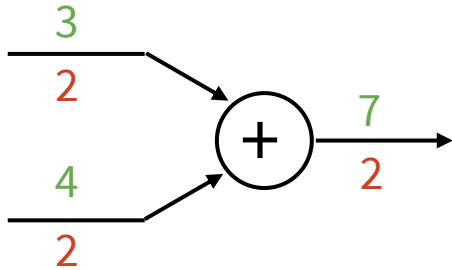


mul gate: “swap multiplier”

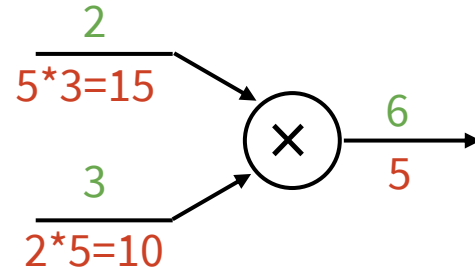


Patterns in gradient flow


add gate: gradient distributor

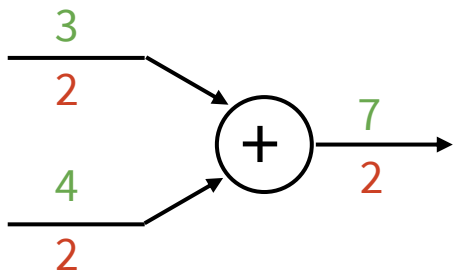

mul gate: “swap multiplier”

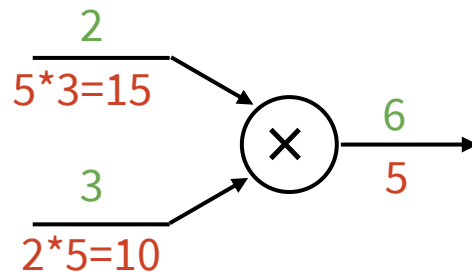


copy gate: gradient adder

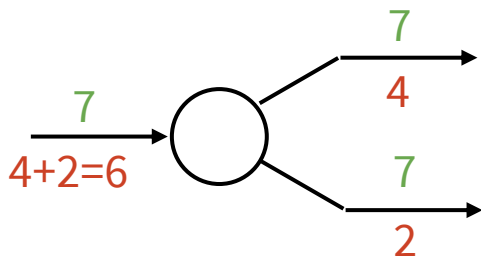


Patterns in gradient flow


add gate: gradient distributor

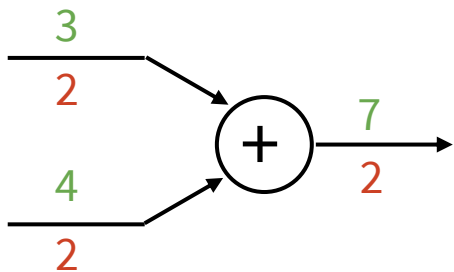


mul gate: “swap multiplier”

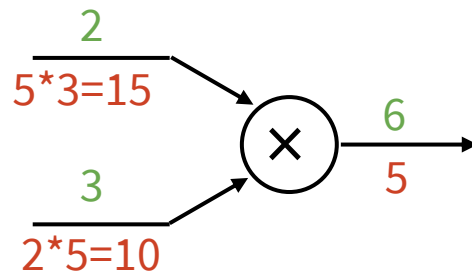


copy gate: gradient adder

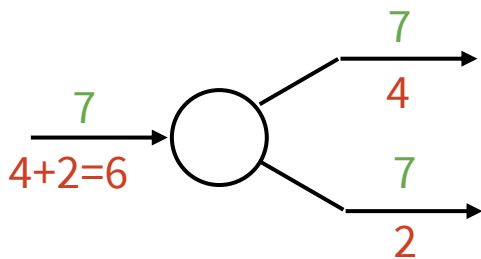

max gate: gradient router

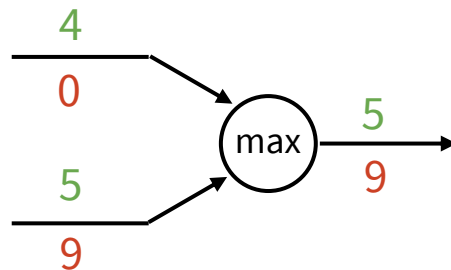

Backprop Implementation: “Flat” code

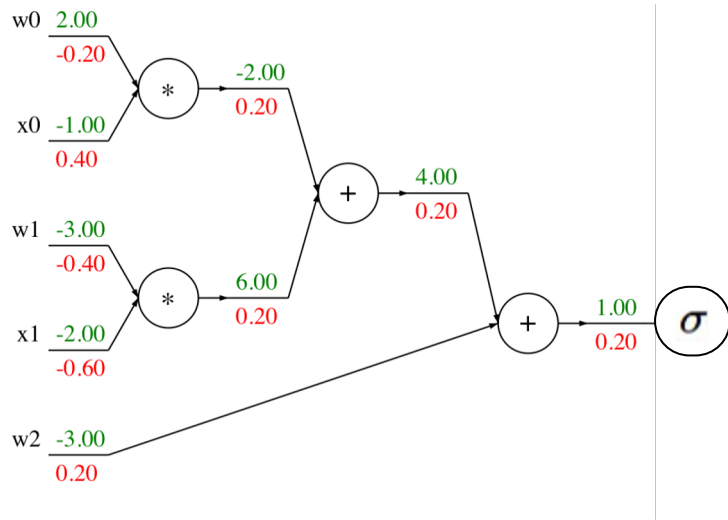

Forward pass:
Compute output


```
def f(w0, x0, w1, x1, w2):
```

```
s0 = w0 * x0  
s1 = w1 * x1  
s2 = s0 + s1  
s3 = s2 + w2  
L = sigmoid(s3)
```

Backward pass:
Compute grads

```
grad_L = 1.0  
grad_s3 = grad_L * (1 - L) * L  
grad_w2 = grad_s3  
grad_s2 = grad_s3  
grad_s0 = grad_s2  
grad_s1 = grad_s2  
grad_w1 = grad_s1 * x1  
grad_x1 = grad_s1 * w1  
grad_w0 = grad_s0 * x0  
grad_x0 = grad_s0 * w0
```

Backprop Implementation: “Flat” code

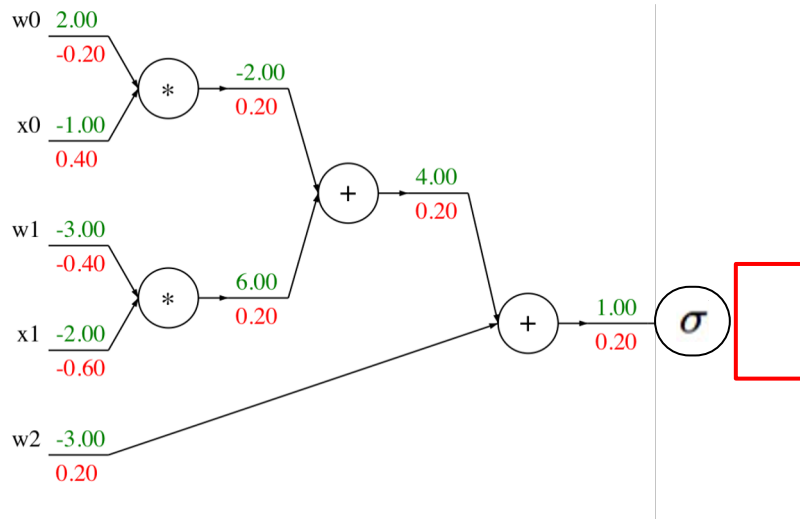

Forward pass:
Compute output


```
def f(w0, x0, w1, x1, w2):
```

```
    s0 = w0 * x0  
    s1 = w1 * x1  
    s2 = s0 + s1  
    s3 = s2 + w2  
    L = sigmoid(s3)
```

Base case

```
    grad_L = 1.0  
    grad_s3 = grad_L * (1 - L) * L  
    grad_w2 = grad_s3  
    grad_s2 = grad_s3  
    grad_s0 = grad_s2  
    grad_s1 = grad_s2  
    grad_w1 = grad_s1 * x1  
    grad_x1 = grad_s1 * w1  
    grad_w0 = grad_s0 * x0  
    grad_x0 = grad_s0 * w0
```

Backprop Implementation: “Flat” code

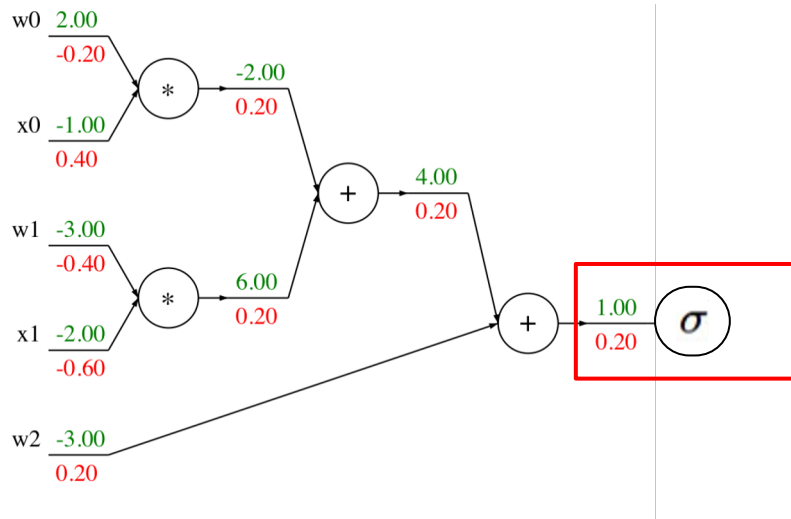

Forward pass:
Compute output

```
def f(w0, x0, w1, x1, w2):
```

```
s0 = w0 * x0
```

```
s1 = w1 * x1
```

```
s2 = s0 + s1
```

```
s3 = s2 + w2
```

```
L = sigmoid(s3)
```

Sigmoid

```
grad_L = 1.0
```

```
grad_s3 = grad_L * (1 - L) * L
```

```
grad_w2 = grad_s3
```

```
grad_s2 = grad_s3
```

```
grad_s0 = grad_s2
```

```
grad_s1 = grad_s2
```


```
grad_w1 = grad_s1 * x1
```

```
grad_x1 = grad_s1 * w1
```

```
grad_w0 = grad_s0 * x0
```

```
grad_x0 = grad_s0 * w0
```

Backprop Implementation: “Flat” code

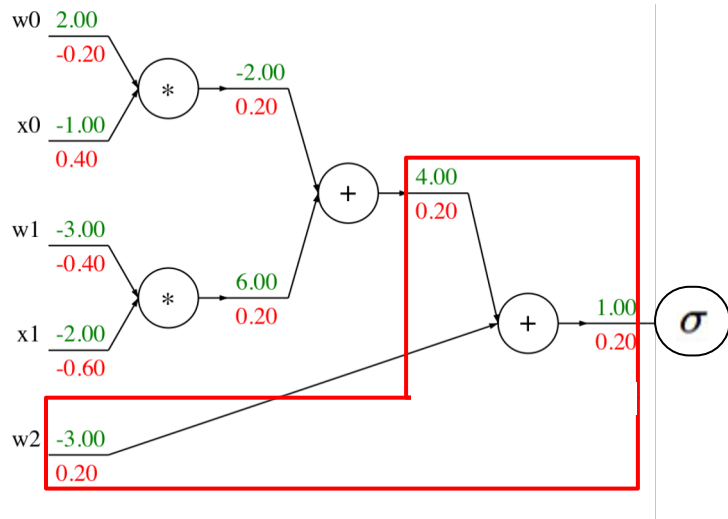

Forward pass:
Compute output


```
def f(w0, x0, w1, x1, w2):
```

```
s0 = w0 * x0  
s1 = w1 * x1  
s2 = s0 + s1  
s3 = s2 + w2  
L = sigmoid(s3)
```

Add gate

```
grad_L = 1.0  
grad_s3 = grad_L * (1 - L) * L  
grad_w2 = grad_s3  
grad_s2 = grad_s3  
grad_s0 = grad_s2  
grad_s1 = grad_s2  
grad_w1 = grad_s1 * x1  
grad_x1 = grad_s1 * w1  
grad_w0 = grad_s0 * x0  
grad_x0 = grad_s0 * w0
```

Backprop Implementation: “Flat” code

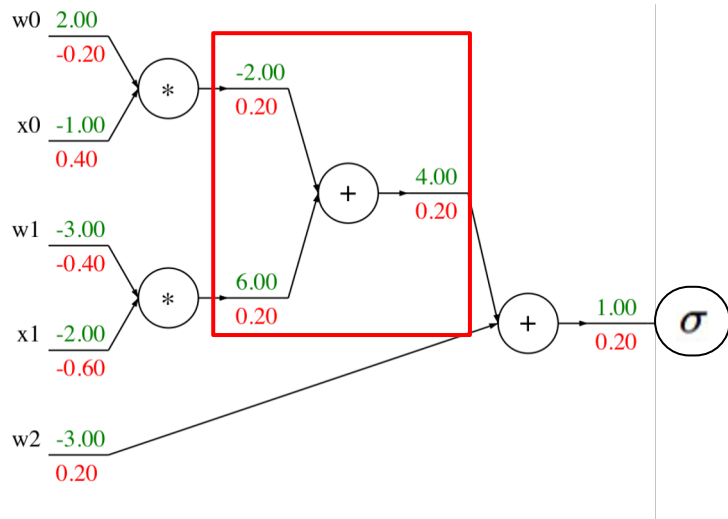

Forward pass:
Compute output


```
def f(w0, x0, w1, x1, w2):
```

```
    s0 = w0 * x0  
    s1 = w1 * x1  
    s2 = s0 + s1  
    s3 = s2 + w2  
    L = sigmoid(s3)
```

```
grad_L = 1.0  
grad_s3 = grad_L * (1 - L) * L  
grad_w2 = grad_s3  
grad_s2 = grad_s3  
grad_s0 = grad_s2  
grad_s1 = grad_s2  
grad_w1 = grad_s1 * x1  
grad_x1 = grad_s1 * w1  
grad_w0 = grad_s0 * x0  
grad_x0 = grad_s0 * w0
```

Add gate

Backprop Implementation: “Flat” code

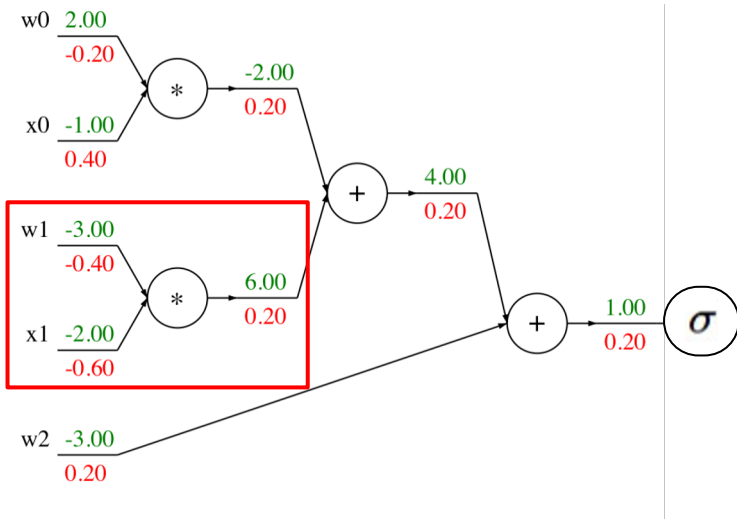

Forward pass:
Compute output

```
def f(w0, x0, w1, x1, w2):
```


```
s0 = w0 * x0  
s1 = w1 * x1  
s2 = s0 + s1  
s3 = s2 + w2  
L = sigmoid(s3)
```

```
grad_L = 1.0  
grad_s3 = grad_L * (1 - L) * L  
grad_w2 = grad_s3  
grad_s2 = grad_s3  
grad_s0 = grad_s2  
grad_s1 = grad_s2
```

Multiply gate

```
grad_w1 = grad_s1 * x1  
grad_x1 = grad_s1 * w1  
grad_w0 = grad_s0 * x0  
grad_x0 = grad_s0 * w0
```

Backprop Implementation: “Flat” code

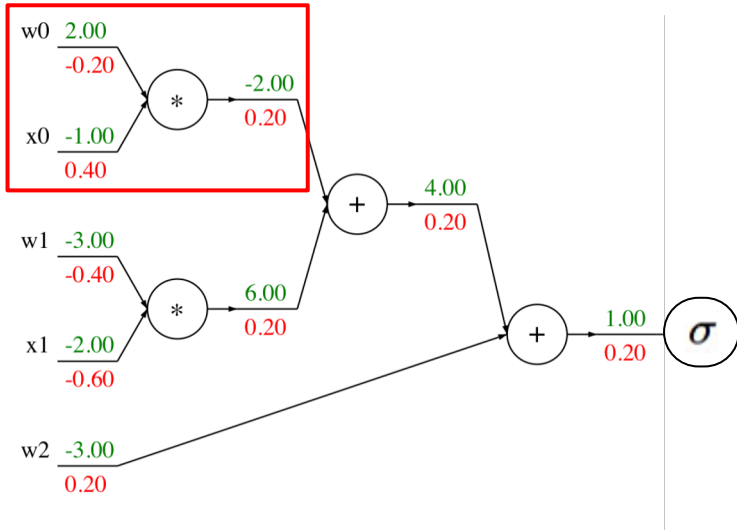

Forward pass:
Compute output

```
def f(w0, x0, w1, x1, w2):
```

```
s0 = w0 * x0
```

```
s1 = w1 * x1
```

```
s2 = s0 + s1
```

```
s3 = s2 + w2
```

```
L = sigmoid(s3)
```

```
grad_L = 1.0
```

```
grad_s3 = grad_L * (1 - L) * L
```

```
grad_w2 = grad_s3
```

```
grad_s2 = grad_s3
```

```
grad_s0 = grad_s2
```

```
grad_s1 = grad_s2
```

```
grad_w1 = grad_s1 * x1
```

```
grad_x1 = grad_s1 * w1
```

```
grad_w0 = grad_s0 * x0
```

```
grad_x0 = grad_s0 * w0
```


Multiply gate

“Flat” Backprop: Do this for assignment 1!

Stage your forward/backward computation!

E.g. for the SVM:

```
# receive W (weights), X (data)
# forward pass (we have 8 lines)
scores = #...
margins = #...
data_loss = #...
reg_loss = #...
loss = data_loss + reg_loss
# backward pass (we have 5 lines)
dmargins = # ... (optionally, we go direct to dscores)
dscores = #...
dW = #...
```

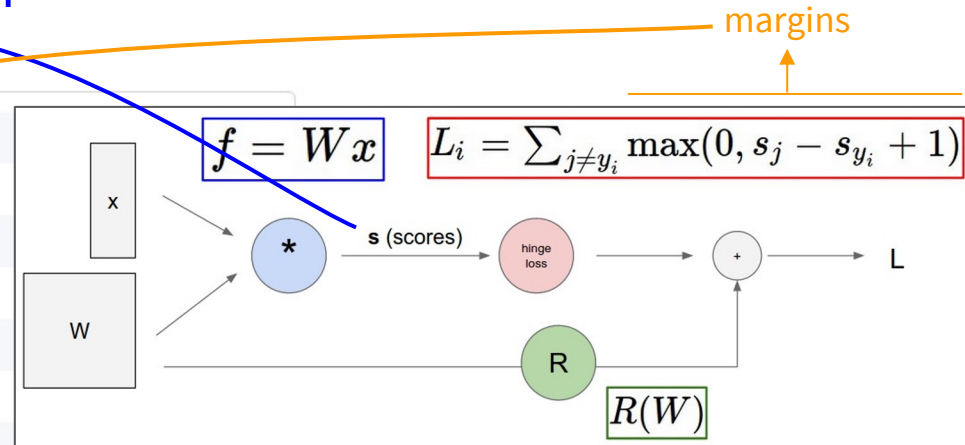


“Flat” Backprop: Do this for assignment 1!

E.g. for two-layer neural net:

```
# receive W1,W2,b1,b2 (weights/biases), X (data)
# forward pass:
h1 = #... function of X,W1,b1
scores = #... function of h1,W2,b2
loss = #... (several lines of code to evaluate Softmax loss)
# backward pass:
dscores = #...
dh1,dW2,db2 = #...
dW1,db1 = #...
```

Backprop Implementation: Modularized API


Graph (or Net) object (rough pseudo code)

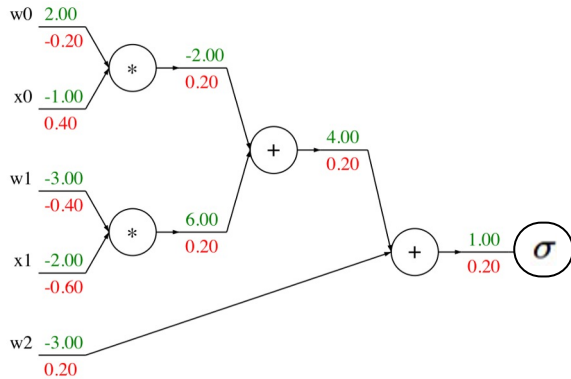

```
class ComputationalGraph(object):  
    #...  
    def forward(inputs):  
        # 1. [pass inputs to input gates...]  
        # 2. forward the computational graph:  
        for gate in self.graph.nodes_topologically_sorted():  
            gate.forward()  
        return loss # the final gate in the graph outputs the loss  
    def backward():  
        for gate in reversed(self.graph.nodes_topologically_sorted()):  
            gate.backward() # little piece of backprop (chain rule applied)  
        return inputs_gradients
```

Modularized implementation: forward / backward API

Gate / Node / Function object: Actual PyTorch code



(x,y,z are scalars)

```
class Multiply(torch.autograd.Function):  
    @staticmethod  
    def forward(ctx, x, y):  
        ctx.save_for_backward(x, y)  ←  
        z = x * y  
        return z  
    @staticmethod  
    def backward(ctx, grad_z):  ←  
        x, y = ctx.saved_tensors  
        grad_x = y * grad_z  # dz/dx * dL/dz  
        grad_y = x * grad_z  # dz/dy * dL/dz  
        return grad_x, grad_y
```

Need to cache some values for use in backward

Upstream gradient

Multiply upstream and local gradients

Example: PyTorch operators

pytorch / pytorch

Watch 1,221 Unstar 26,770 Fork 6,340

Code Issues 2,286 Pull requests 561 Projects 4 Wiki Insights

Tree: 517c7c9861 - pytorch / aten / src / THNN / generic /

Create new file Upload files Find file History

ezyang and facebook-github-bot Canonicalize all includes in PyTorch. (#14849) Latest commit 517c7c9 on Dec 8, 2018

...		
AbsCriterion.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
BCECriterion.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
ClassNLLCriterion.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
Col2im.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
ELU.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
FeatureLPPooling.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
GatedLinearUnit.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
HardTanh.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
Im2Col.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
IndexLinear.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
LeakyReLU.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
LogSigmoid.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
MSECriterion.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
MultiLabelMarginCriterion.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
MultiMarginCriterion.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
rReLU.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
Sigmoid.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SmoothL1Criterion.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SoftMarginCriterion.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SoftPlus.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SoftShrink.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SparseLinear.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SpatialAdaptiveAveragePooling.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SpatialAdaptiveMaxPooling.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SpatialAveragePooling.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago

SpatialClassNLLCriterion.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SpatialConvolutionMM.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SpatialDilatedConvolution.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SpatialDilatedMaxPooling.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SpatialFractionalMaxPooling.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SpatialFullDilatedConvolution.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SpatialMaxUnpooling.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SpatialReflectionPadding.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SpatialReplicationPadding.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SpatialUpsamplingBilinear.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
SpatialUpsamplingNearest.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
THNN.h	Canonicalize all includes in PyTorch. (#14849)	4 months ago
Tanh.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
TemporalReflectionPadding.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
TemporalReplicationPadding.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
TemporalRowConvolution.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
TemporalUpsamplingLinear.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
TemporalUpsamplingNearest.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
VolumetricAdaptiveAveragePoolin...	Canonicalize all includes in PyTorch. (#14849)	4 months ago
VolumetricAdaptiveMaxPooling.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
VolumetricAveragePooling.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
VolumetricConvolutionMM.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
VolumetricDilatedConvolution.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
VolumetricDilatedMaxPooling.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
VolumetricFractionalMaxPooling.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
VolumetricFullDilatedConvolution.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
VolumetricMaxUnpooling.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
VolumetricReplicationPadding.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
VolumetricUpsamplingNearest.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
VolumetricUpsamplingTrilinear.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago
linear_upsampling.h	Implement nn.functional.interpolate based on upsample. (#8591)	9 months ago
pooling_shape.h	Use integer math to compute output size of pooling operations (#14405)	4 months ago
unfold.c	Canonicalize all includes in PyTorch. (#14849)	4 months ago

PyTorch sigmoid layer

```
1 #ifndef TH_GENERIC_FILE
2 #define TH_GENERIC_FILE "THNN/generic/Sigmoid.c"
3 #else
4
5 void THNN_(Sigmoid_updateOutput)(
6     THNNState *state,
7     THTensor *input,
8     THTensor *output)
9 {
10     THTensor_(sigmoid)(output, input);
11 }
12
13 void THNN_(Sigmoid_updateGradInput)(
14     THNNState *state,
15     THTensor *gradOutput,
16     THTensor *gradInput,
17     THTensor *output)
18 {
19     THNN_CHECK_NELEMENT(output, gradOutput);
20     THTensor_(resizeAs)(gradInput, output);
21     TH_TENSOR_APPLY3(scalar_t, gradInput, scalar_t, gradOutput, scalar_t, output,
22         scalar_t z = *output_data;
23         *gradInput_data = *gradOutput_data * (1. - z) * z;
24     );
25 }
26
27 #endif
```

Forward

$$\sigma(x) = \frac{1}{1 + e^{-x}}$$



[Source](#)

PyTorch sigmoid layer

```

1 #ifndef TH_GENERIC_FILE
2 #define TH_GENERIC_FILE "THNN/generic/Sigmoid.c"
3 #else
4
5 void THNN_(Sigmoid_updateOutput)(
6     THNNState *state,
7     THTensor *input,
8     THTensor *output)
9 {
10     THTensor_(sigmoid)(output, input);
11 }
12
13 void THNN_(Sigmoid_updateGradInput)(
14     THNNState *state,
15     THTensor *gradOutput,
16     THTensor *gradInput,
17     THTensor *output)
18 {
19     THNN_CHECK_NELEMENT(output, gradOutput);
20     THTensor_(resizeAs)(gradInput, output);
21     TH_TENSOR_APPLY3(scalar_t, gradInput, scalar_t, gradOutput, scalar_t, output,
22         scalar_t z = *output_data;
23         *gradInput_data = *gradOutput_data * (1. - z) * z;
24     );
25 }
26
27 #endif

```

Forward

$$\sigma(x) = \frac{1}{1 + e^{-x}}$$

```

static void sigmoid_kernel(TensorIterator& iter) {
    AT_DISPATCH_FLOATING_TYPES(iter.dtype(), "sigmoid_cpu", [&]() {
        unary_kernel_vec(
            iter,
            [=](scalar_t a) -> scalar_t { return (1 / (1 + std::exp((-a))))}; },
            [=](Vec256<scalar_t> a) {
                a = Vec256<scalar_t>((scalar_t)(0)) - a;
                a = a.exp();
                a = Vec256<scalar_t>((scalar_t)(1)) + a;
                a = a.reciprocal();
                return a;
            });
    });
}

```

Forward actually defined elsewhere...

```
return (1 / (1 + std::exp((-a))));
```

[Source](#)

PyTorch sigmoid layer

```
1 #ifndef TH_GENERIC_FILE
2 #define TH_GENERIC_FILE "THNN/generic/Sigmoid.c"
3 #else
4
5 void THNN_(Sigmoid_updateOutput)(
6     THNNState *state,
7     THTensor *input,
8     THTensor *output)
9 {
10     THTensor_(sigmoid)(output, input);
11 }
12
13 void THNN_(Sigmoid_updateGradInput)(
14     THNNState *state,
15     THTensor *gradOutput,
16     THTensor *gradInput,
17     THTensor *output)
18 {
19     THNN_CHECK_NELEMENT(output, gradOutput);
20     THTensor_(resizeAs)(gradInput, output);
21     TH_TENSOR_APPLY3(scalar_t, gradInput, scalar_t, gradOutput, scalar_t, output,
22         scalar_t z = *output_data;
23         *gradInput_data = *gradOutput_data * (1. - z) * z;
24     );
25 }
26
27 #endif
```

Forward

$$\sigma(x) = \frac{1}{1 + e^{-x}}$$

```
static void sigmoid_kernel(TensorIterator& iter) {
    AT_DISPATCH_FLOATING_TYPES(iter.dtype(), "sigmoid_cpu", [&]() {
        unary_kernel_vec(
            iter,
            [=](scalar_t a) -> scalar_t { return (1 / (1 + std::exp((-a)))); },
            [=](Vec256<scalar_t> a) {
                a = Vec256<scalar_t>((scalar_t)(0)) - a;
                a = a.exp();
                a = Vec256<scalar_t>((scalar_t)(1)) + a;
                a = a.reciprocal();
                return a;
            });
    });
}
```

Forward actually defined elsewhere...

Backward

$$(1 - \sigma(x)) \sigma(x)$$

[Source](#)

So far: backprop with scalars

What about vector-valued functions?

Recap: Vector derivatives

Scalar to Scalar

$$x \in \mathbb{R}, y \in \mathbb{R}$$

Regular derivative:

$$\frac{\partial y}{\partial x} \in \mathbb{R}$$

If x changes by a small amount, how much will y change?

Recap: Vector derivatives

Scalar to Scalar

$$x \in \mathbb{R}, y \in \mathbb{R}$$

Regular derivative:

$$\frac{\partial y}{\partial x} \in \mathbb{R}$$

If x changes by a small amount, how much will y change?

Vector to Scalar

$$x \in \mathbb{R}^N, y \in \mathbb{R}$$

Derivative is Gradient:

$$\frac{\partial y}{\partial x} \in \mathbb{R}^N \quad \left(\frac{\partial y}{\partial x} \right)_n = \frac{\partial y}{\partial x_n}$$

For each element of x , if it changes by a small amount then how much will y change?

Recap: Vector derivatives

Scalar to Scalar

$$x \in \mathbb{R}, y \in \mathbb{R}$$

Regular derivative:

$$\frac{\partial y}{\partial x} \in \mathbb{R}$$

If x changes by a small amount, how much will y change?

Vector to Scalar

$$x \in \mathbb{R}^N, y \in \mathbb{R}$$

Derivative is Gradient:

$$\frac{\partial y}{\partial x} \in \mathbb{R}^N \quad \left(\frac{\partial y}{\partial x} \right)_n = \frac{\partial y}{\partial x_n}$$

For each element of x , if it changes by a small amount then how much will y change?

Vector to Vector


$$x \in \mathbb{R}^N, y \in \mathbb{R}^M$$

Derivative is Jacobian:


$$\frac{\partial y}{\partial x} \in \mathbb{R}^{N \times M} \quad \left(\frac{\partial y}{\partial x} \right)_{n,m} = \frac{\partial y_m}{\partial x_n}$$

For each element of x , if it changes by a small amount then how much will each element of y change?


Backprop with Vectors

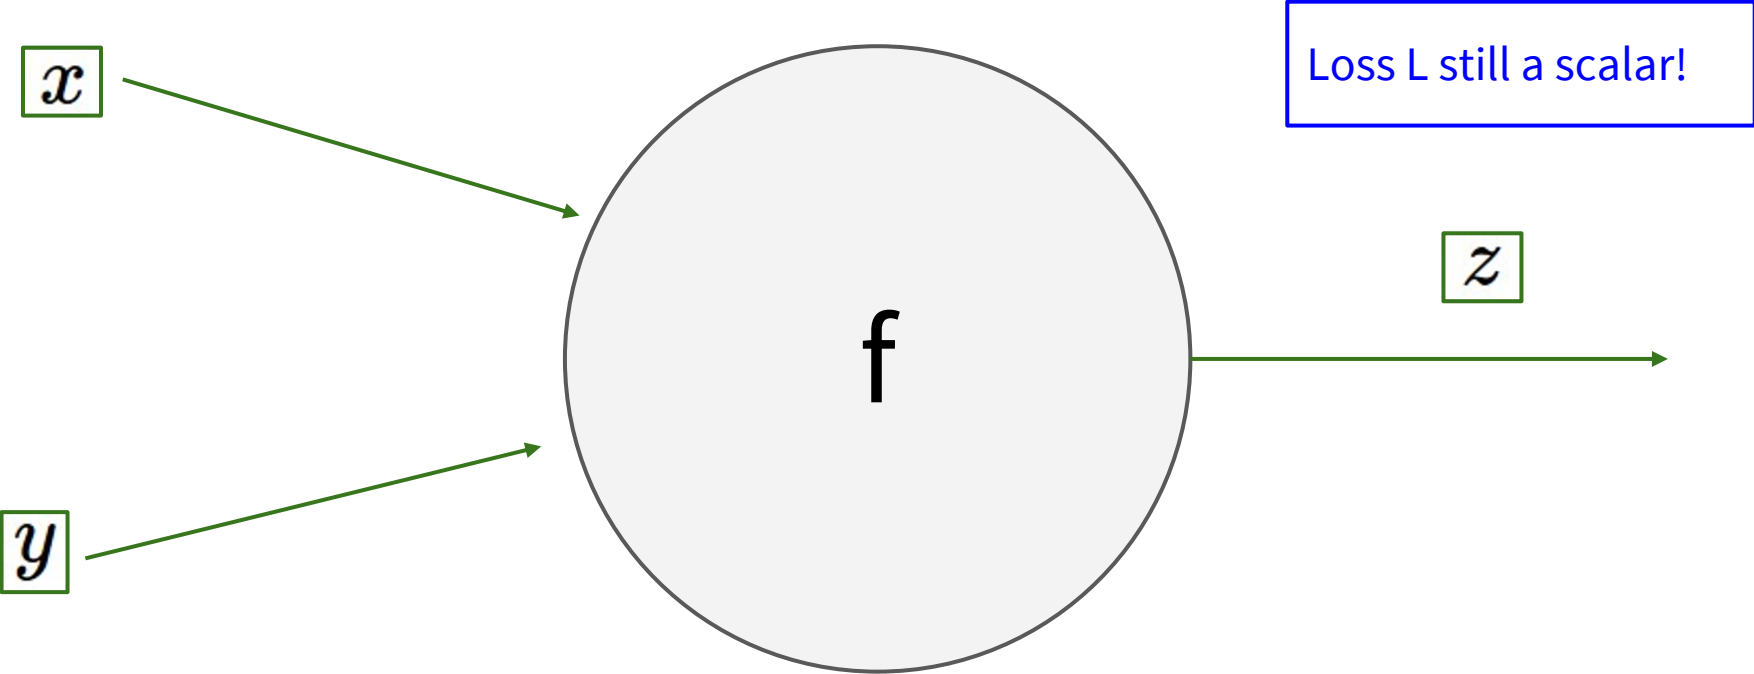


Backprop with Vectors

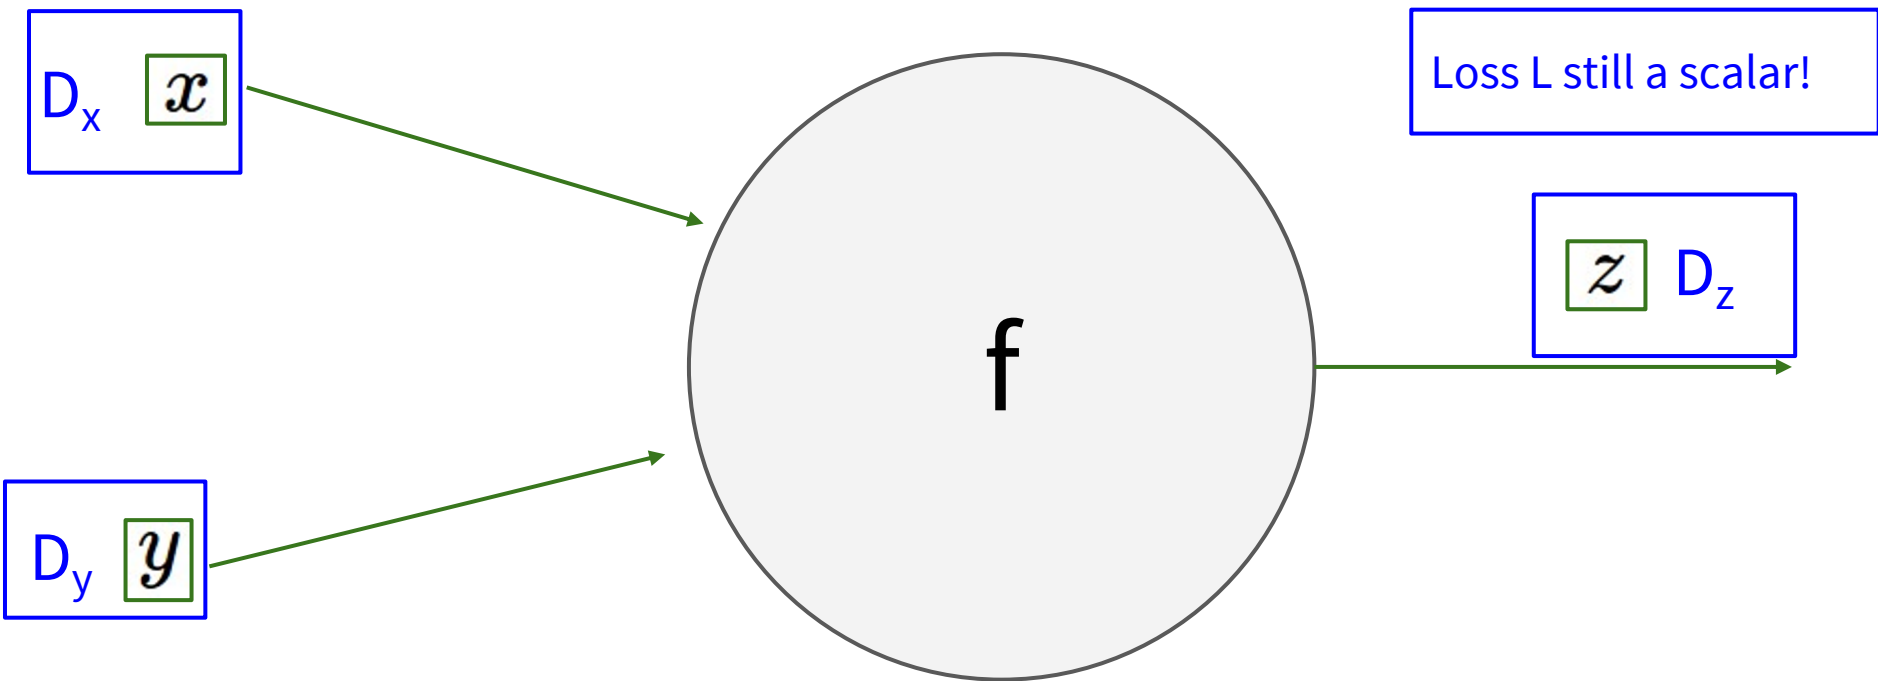

Backprop with Vectors

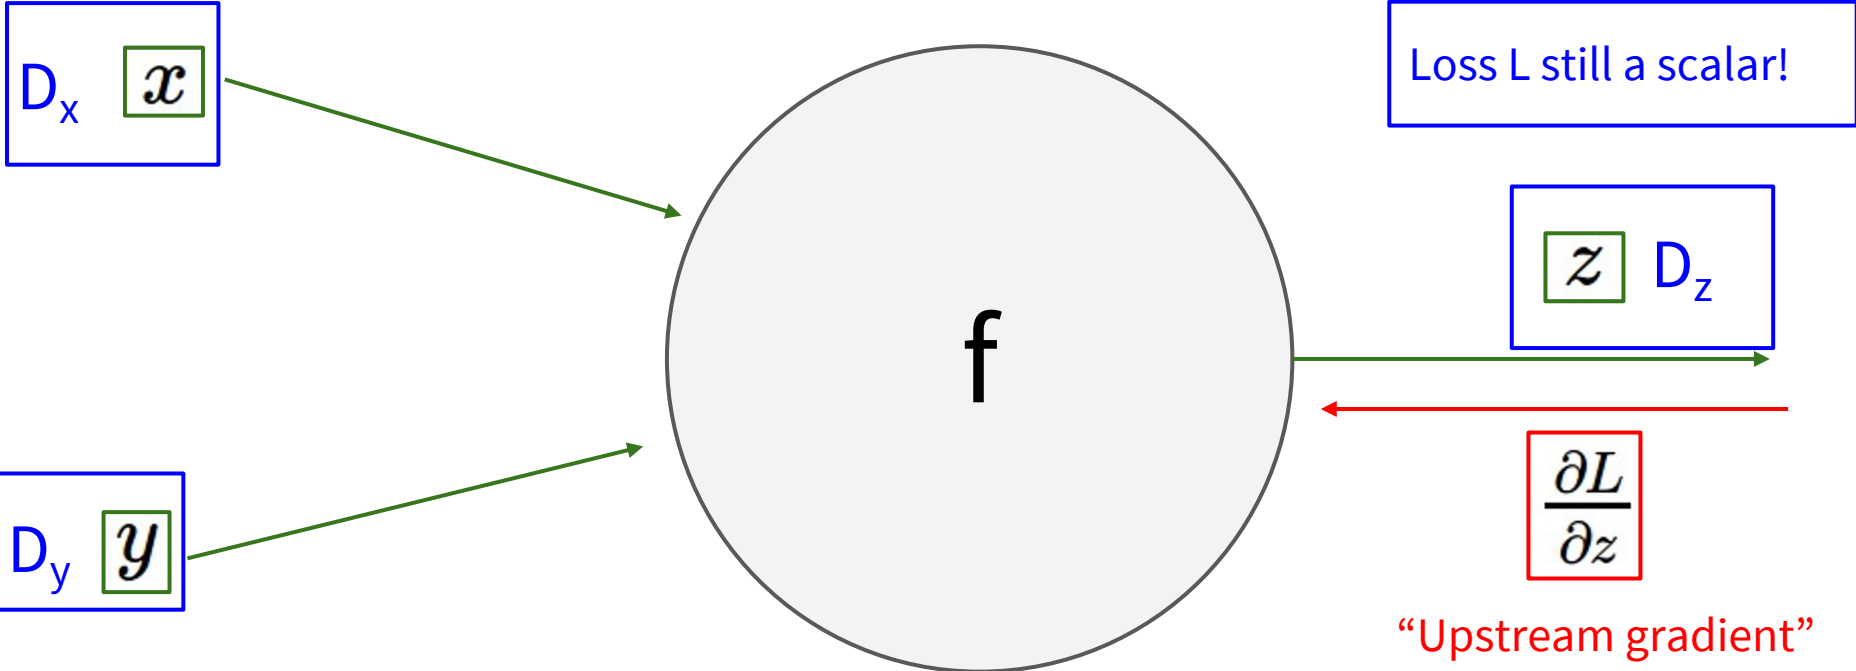

Backprop with Vectors

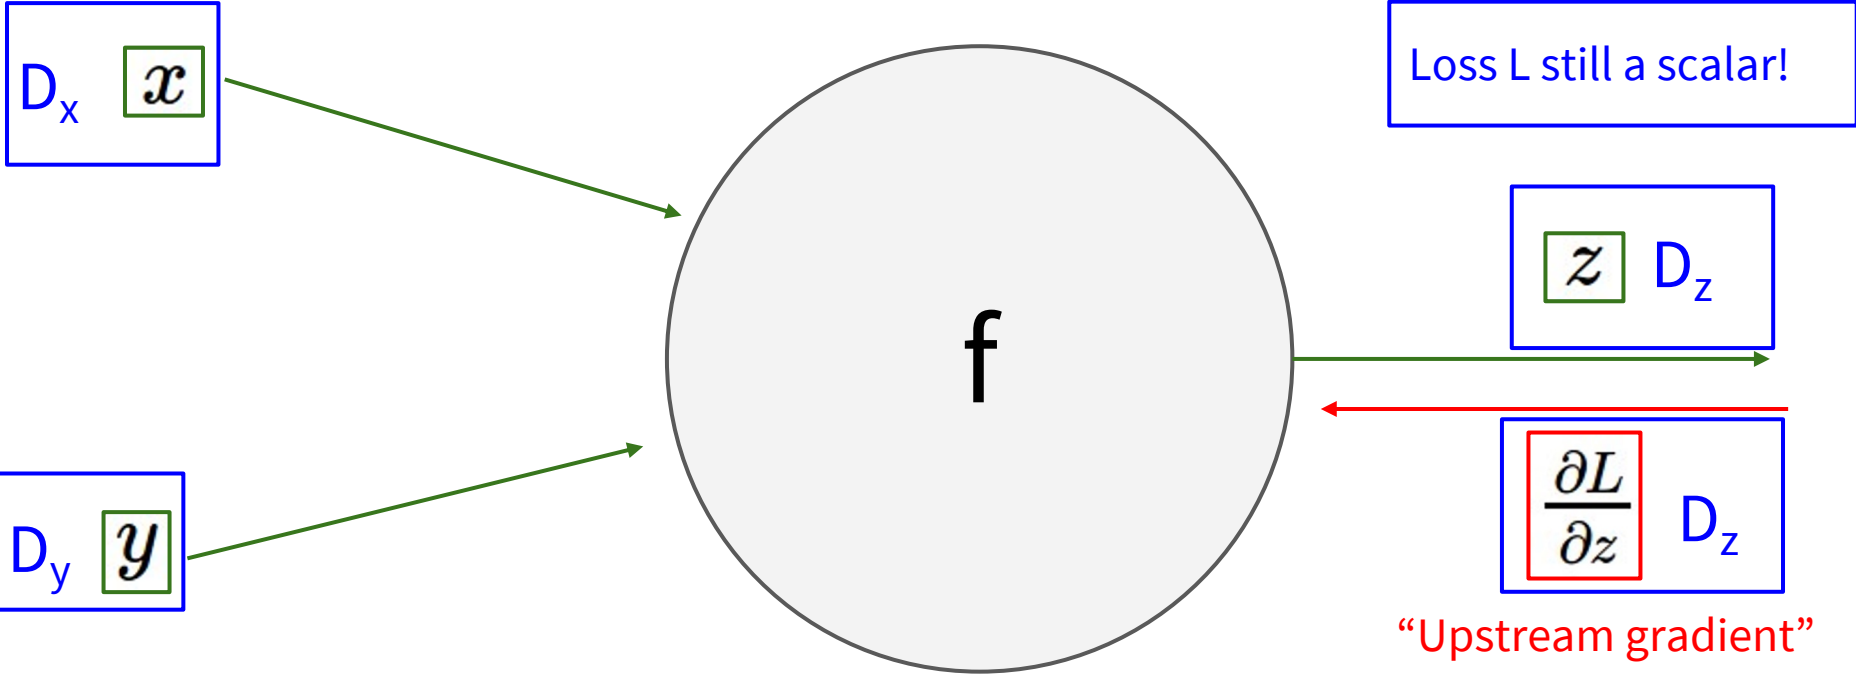

Loss L still a scalar!


z D_z

$\frac{\partial L}{\partial z}$ D_z


“Upstream gradient”

For each element of z , how much does it influence L?


Backprop with Vectors

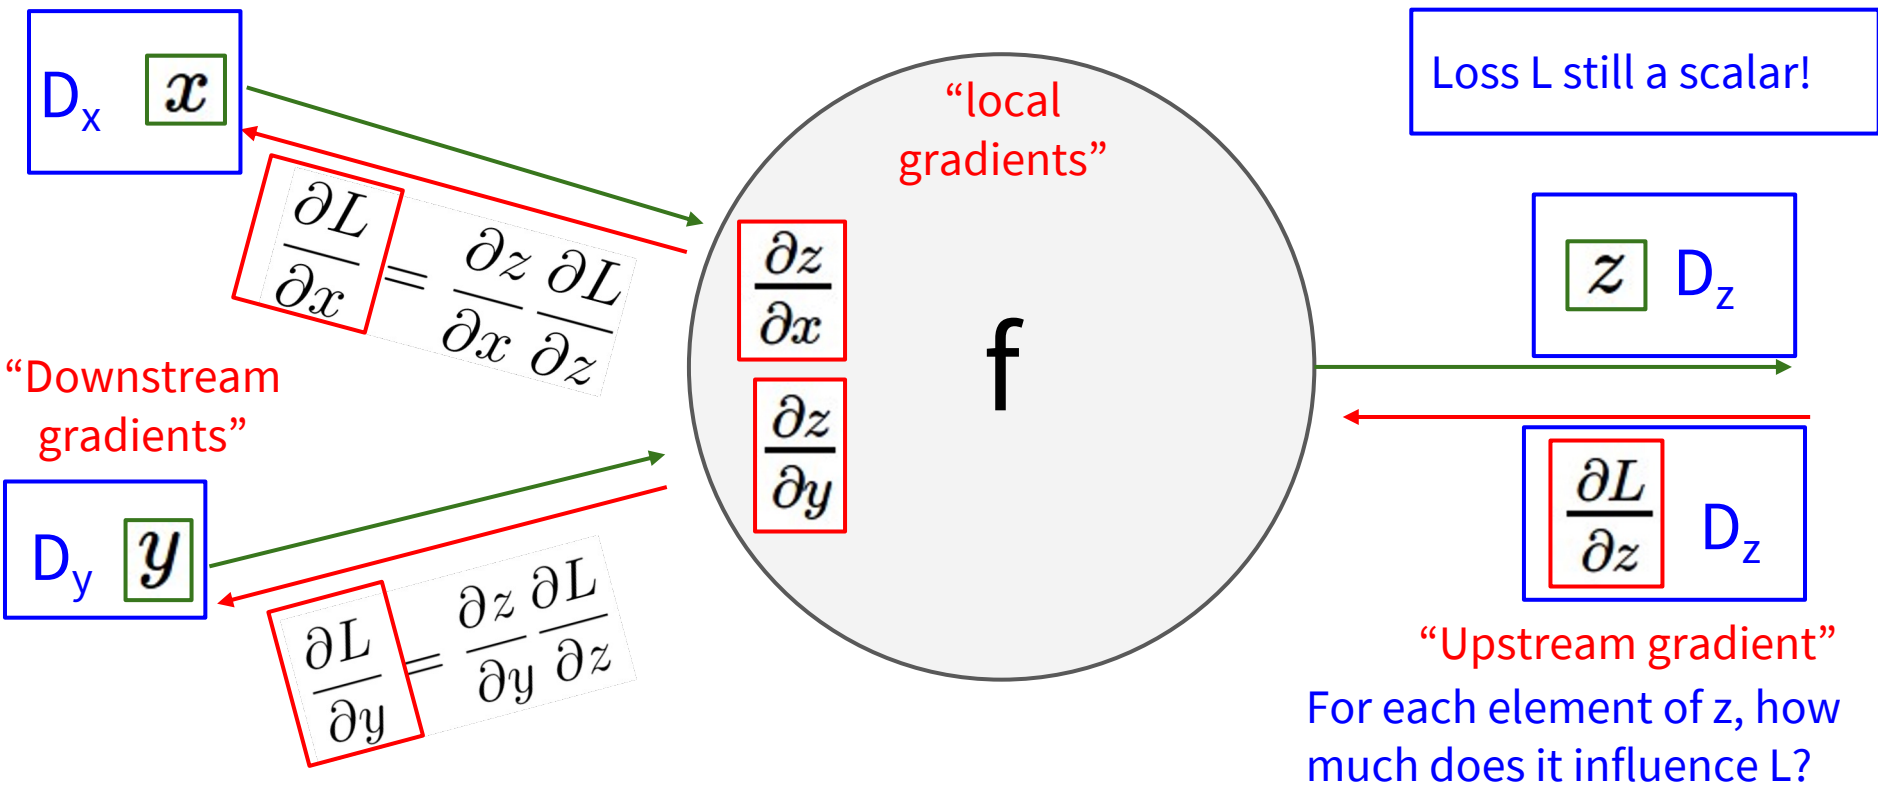


Backprop with Vectors

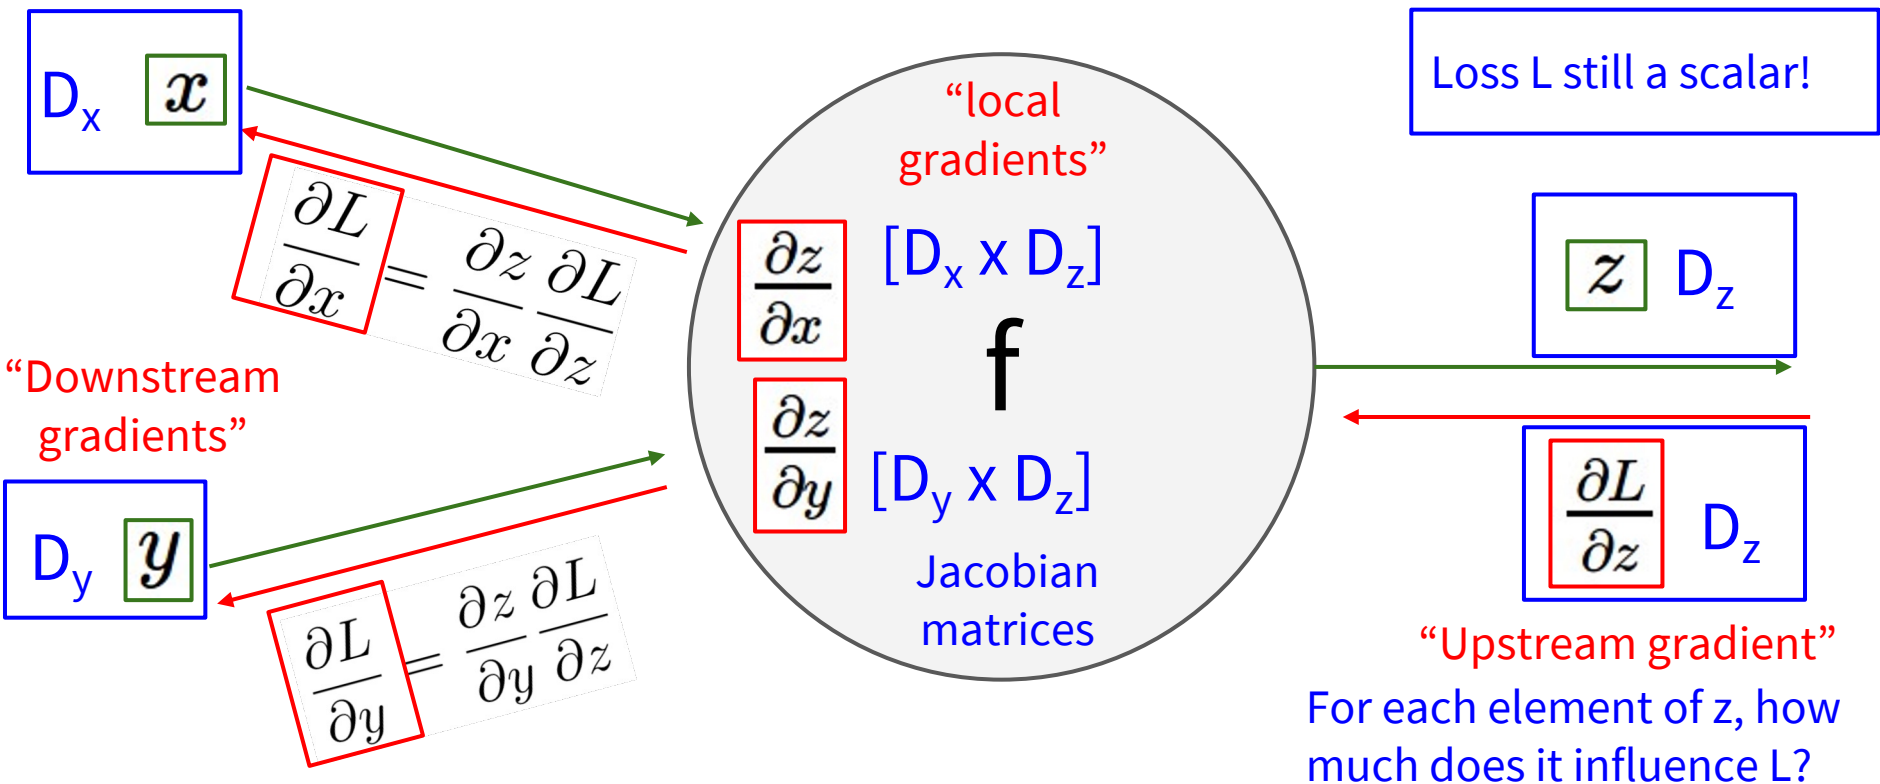


Backprop with Vectors

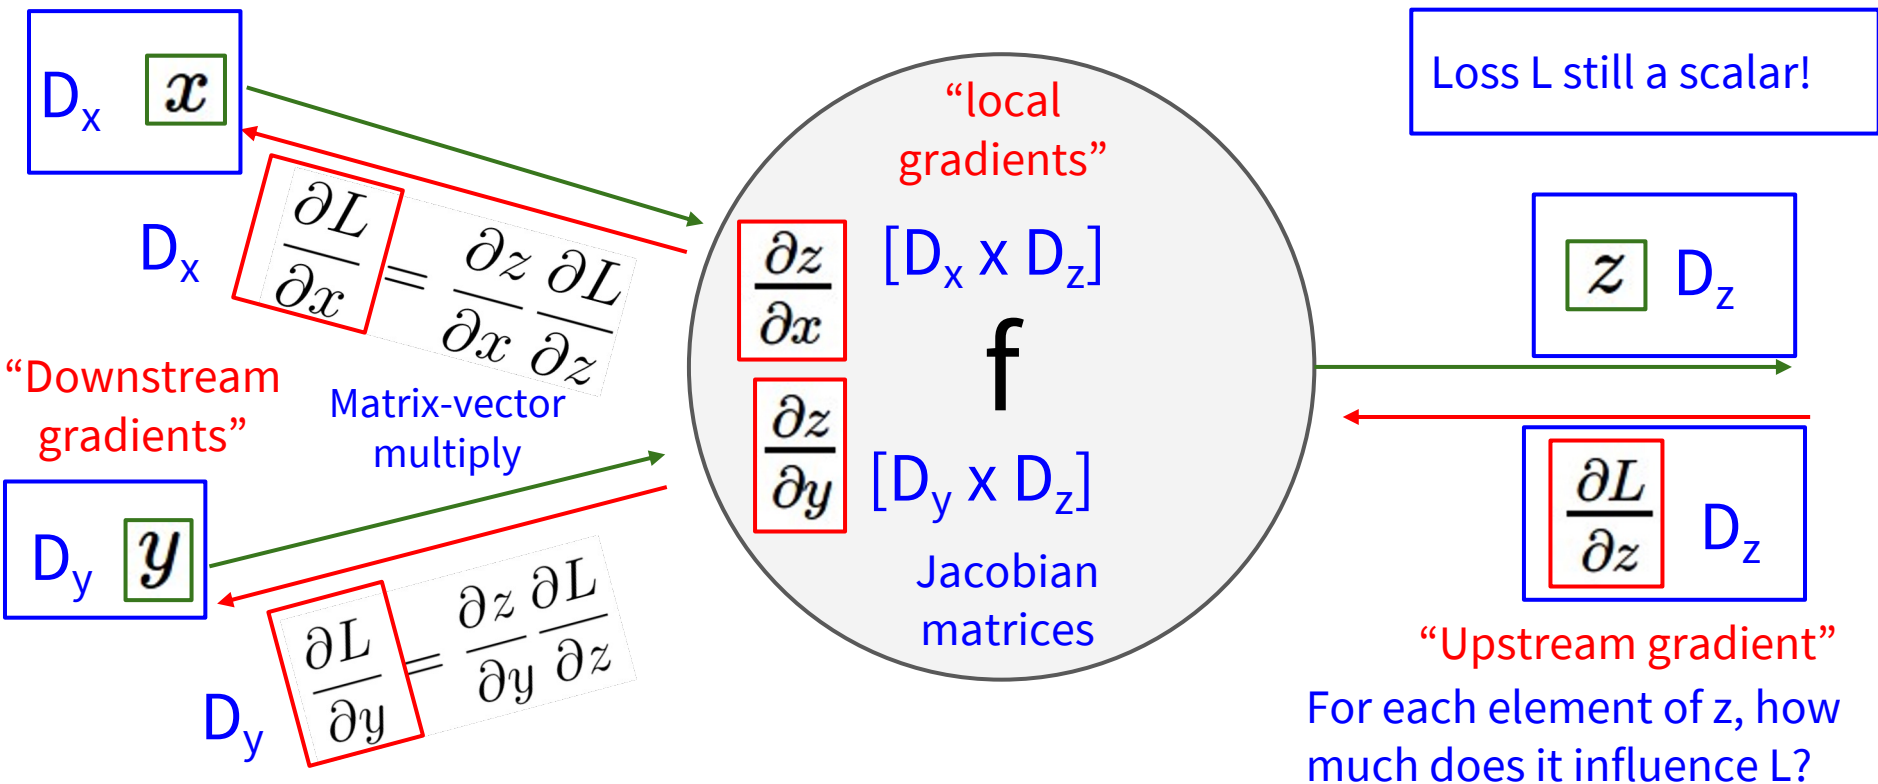

Gradients of variables wrt loss have same dims as the original variable

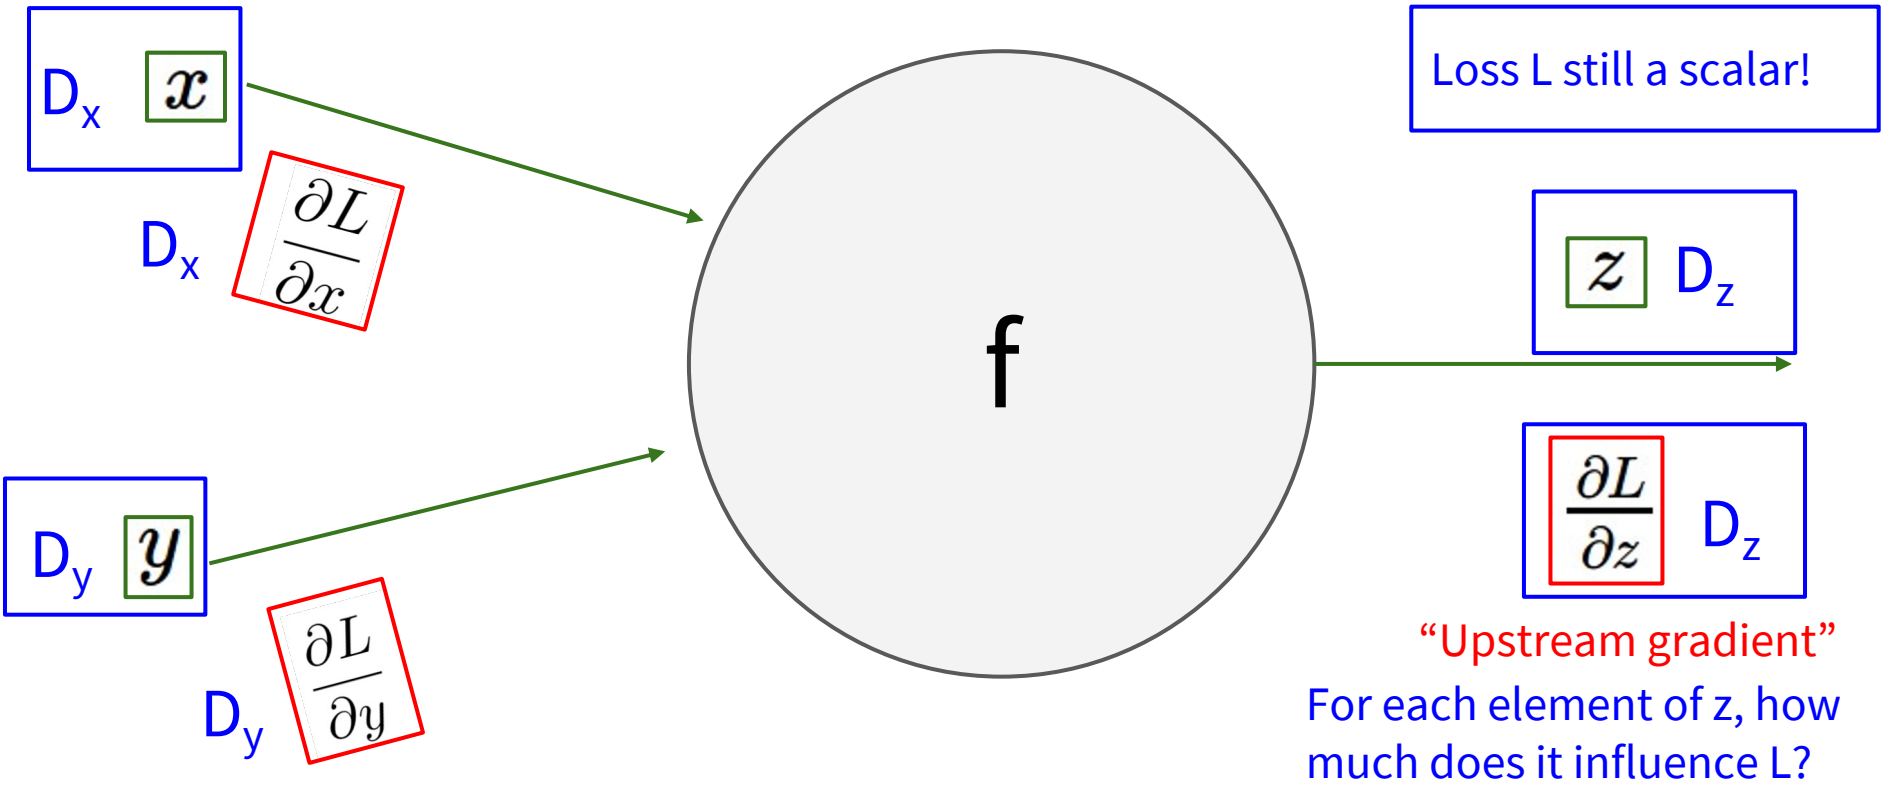


Backprop with Vectors

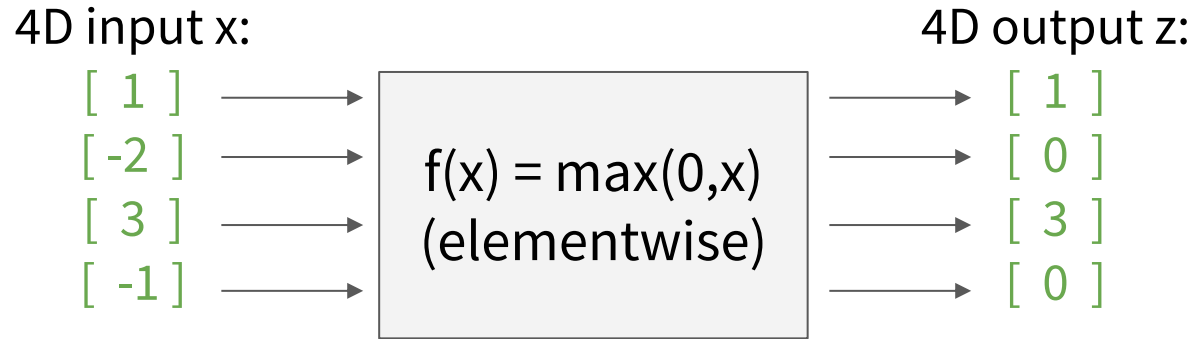

Backprop with Vectors

4D input x:

$\begin{bmatrix} 1 \\ -2 \\ 3 \\ -1 \end{bmatrix}$

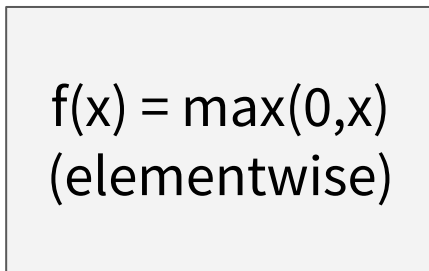

4D output z:

$\begin{bmatrix} 1 \\ 0 \\ 3 \\ 0 \end{bmatrix}$

4D dL/dz:


$\begin{bmatrix} 4 \\ -1 \\ 5 \\ 9 \end{bmatrix}$

Upstream
gradient

Backprop with Vectors

4D input x:

$\begin{bmatrix} 1 \\ -2 \\ 3 \\ -1 \end{bmatrix}$

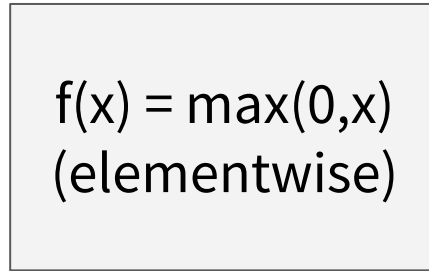

4D output z:

$\begin{bmatrix} 1 \\ 0 \\ 3 \\ 0 \end{bmatrix}$

Jacobian dz/dx

$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}$

4D dL/dz :


$\begin{bmatrix} 4 \\ -1 \\ 5 \\ 9 \end{bmatrix}$

Upstream
gradient

Backprop with Vectors

4D input x:

$\begin{bmatrix} 1 \\ -2 \\ 3 \\ -1 \end{bmatrix}$

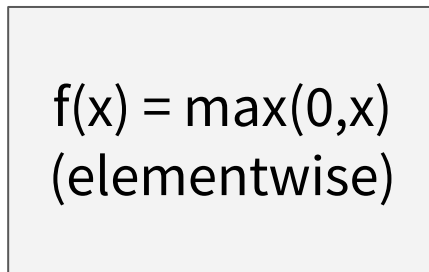

4D output z:

$\begin{bmatrix} 1 \\ 0 \\ 3 \\ 0 \end{bmatrix}$

$[dz/dx] [dL/dz]$

$\begin{bmatrix} 1 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} 4 \end{bmatrix}$

$\begin{bmatrix} 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} -1 \end{bmatrix}$

$\begin{bmatrix} 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} 5 \end{bmatrix}$

$\begin{bmatrix} 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} 9 \end{bmatrix}$

4D dL/dz:

$\begin{bmatrix} 4 \end{bmatrix}$

$\begin{bmatrix} -1 \end{bmatrix}$

$\begin{bmatrix} 5 \end{bmatrix}$


$\begin{bmatrix} 9 \end{bmatrix}$

Upstream
gradient

Backprop with Vectors

4D input x:

$\begin{bmatrix} 1 \\ -2 \\ 3 \\ -1 \end{bmatrix}$

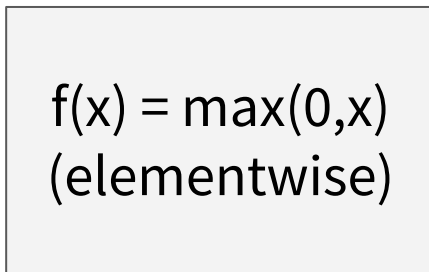

4D output z:

$\begin{bmatrix} 1 \\ 0 \\ 3 \\ 0 \end{bmatrix}$

4D dL/dx :

$\begin{bmatrix} 4 \\ 0 \\ 5 \\ 0 \end{bmatrix}$

$[dz/dx] [dL/dz]$

$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} 4 \\ -1 \\ 5 \\ 9 \end{bmatrix}$

4D dL/dz :


$\begin{bmatrix} 4 \\ -1 \\ 5 \\ 9 \end{bmatrix}$

Upstream
gradient

Backprop with Vectors

4D input x:

$\begin{bmatrix} 1 \\ -2 \\ 3 \\ -1 \end{bmatrix}$

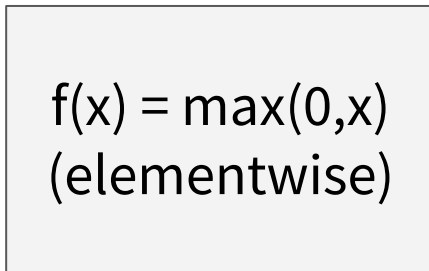

4D output z:

$\begin{bmatrix} 1 \\ 0 \\ 3 \\ 0 \end{bmatrix}$

Jacobian is sparse:
 off-diagonal entries
 always zero! Never
 explicitly form
 Jacobian -- instead
 use implicit
 multiplication

4D dL/dx :

$\begin{bmatrix} 4 \\ 0 \\ 5 \\ 0 \end{bmatrix}$

$[dz/dx] [dL/dz]$

$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} 4 \\ -1 \\ 5 \\ 9 \end{bmatrix}$

4D dL/dz :


$\begin{bmatrix} 4 \\ -1 \\ 5 \\ 9 \end{bmatrix}$

Upstream
 gradient

Backprop with Vectors

4D input x:

$\begin{bmatrix} 1 \\ -2 \\ 3 \\ -1 \end{bmatrix}$

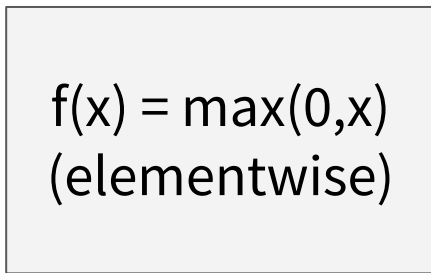

4D output z:

$\begin{bmatrix} 1 \\ 0 \\ 3 \\ 0 \end{bmatrix}$

Jacobian is sparse:
 off-diagonal entries
 always zero! Never
 explicitly form
 Jacobian -- instead
 use implicit
 multiplication

4D dL/dx :

$\begin{bmatrix} 4 \\ 0 \\ 5 \\ 0 \end{bmatrix}$

$[dz/dx] [dL/dz]$

$$\left(\frac{\partial L}{\partial x}\right)_i = \begin{cases} \left(\frac{\partial L}{\partial z}\right)_i & \text{if } x_i > 0 \\ 0 & \text{otherwise} \end{cases}$$

4D dL/dz :

$\begin{bmatrix} 4 \\ -1 \\ 5 \\ 9 \end{bmatrix}$

Upstream
 gradient

Backprop with Matrices (or Tensors)

Loss L still a scalar!

dL/dx always has the same shape as x !


$[D_x \times M_x]$

x

Matrix-vector multiply

$[D_y \times M_y]$

y

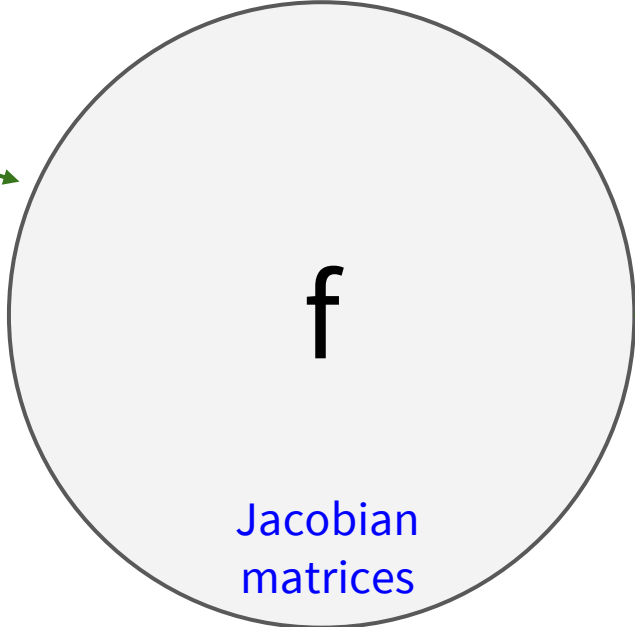


z

$[D_z \times M_z]$

Backprop with Matrices (or Tensors)

Loss L still a scalar!


dL/dx always has the same shape as x !

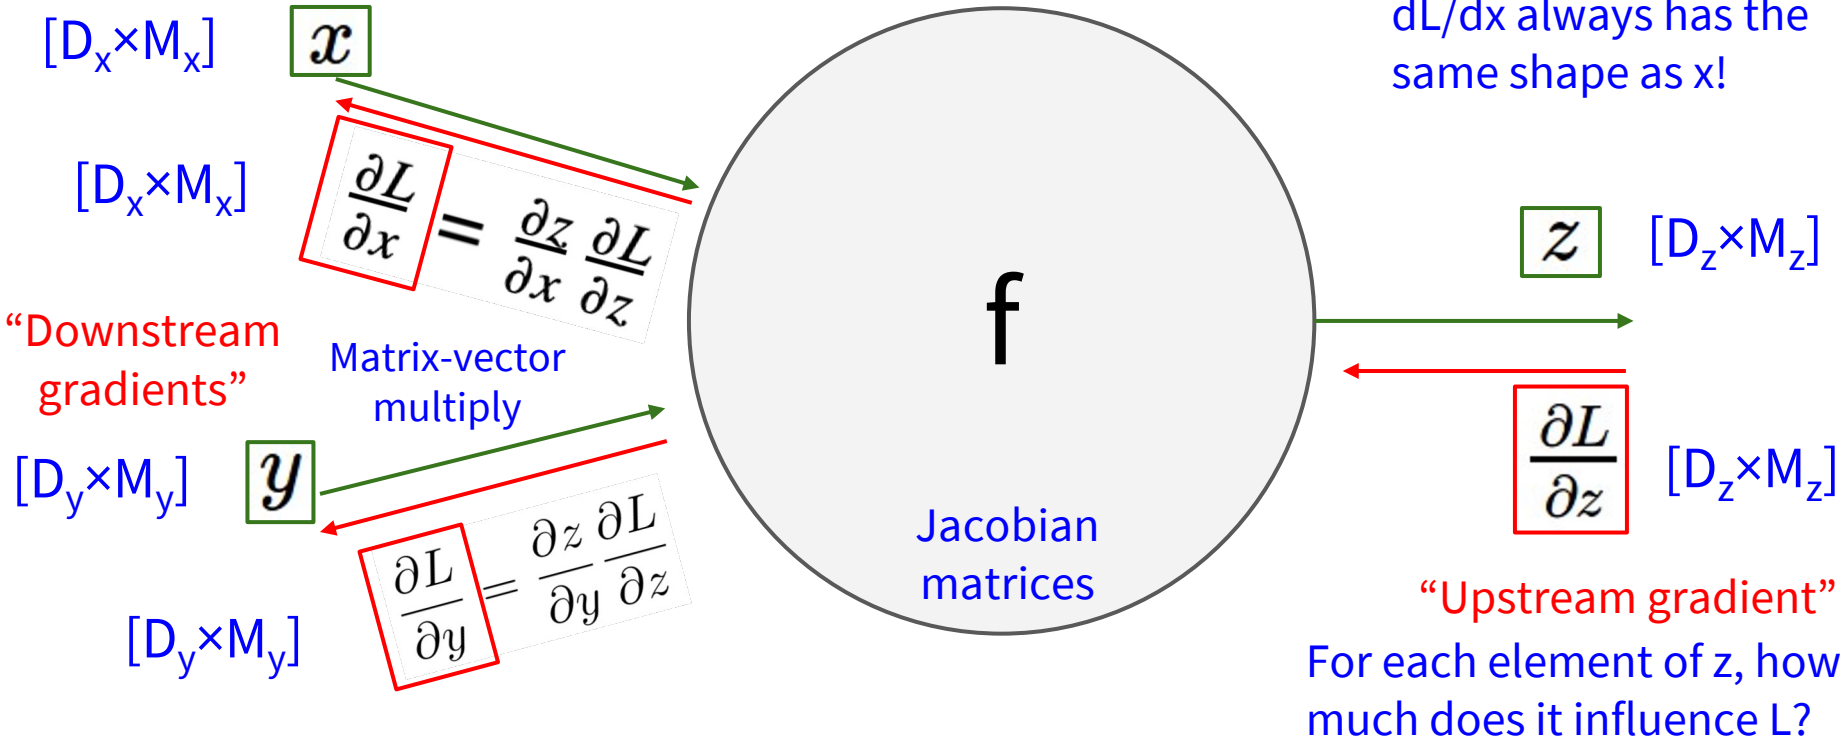

Backprop with Matrices (or Tensors)

Loss L still a scalar!


dL/dx always has the same shape as x !

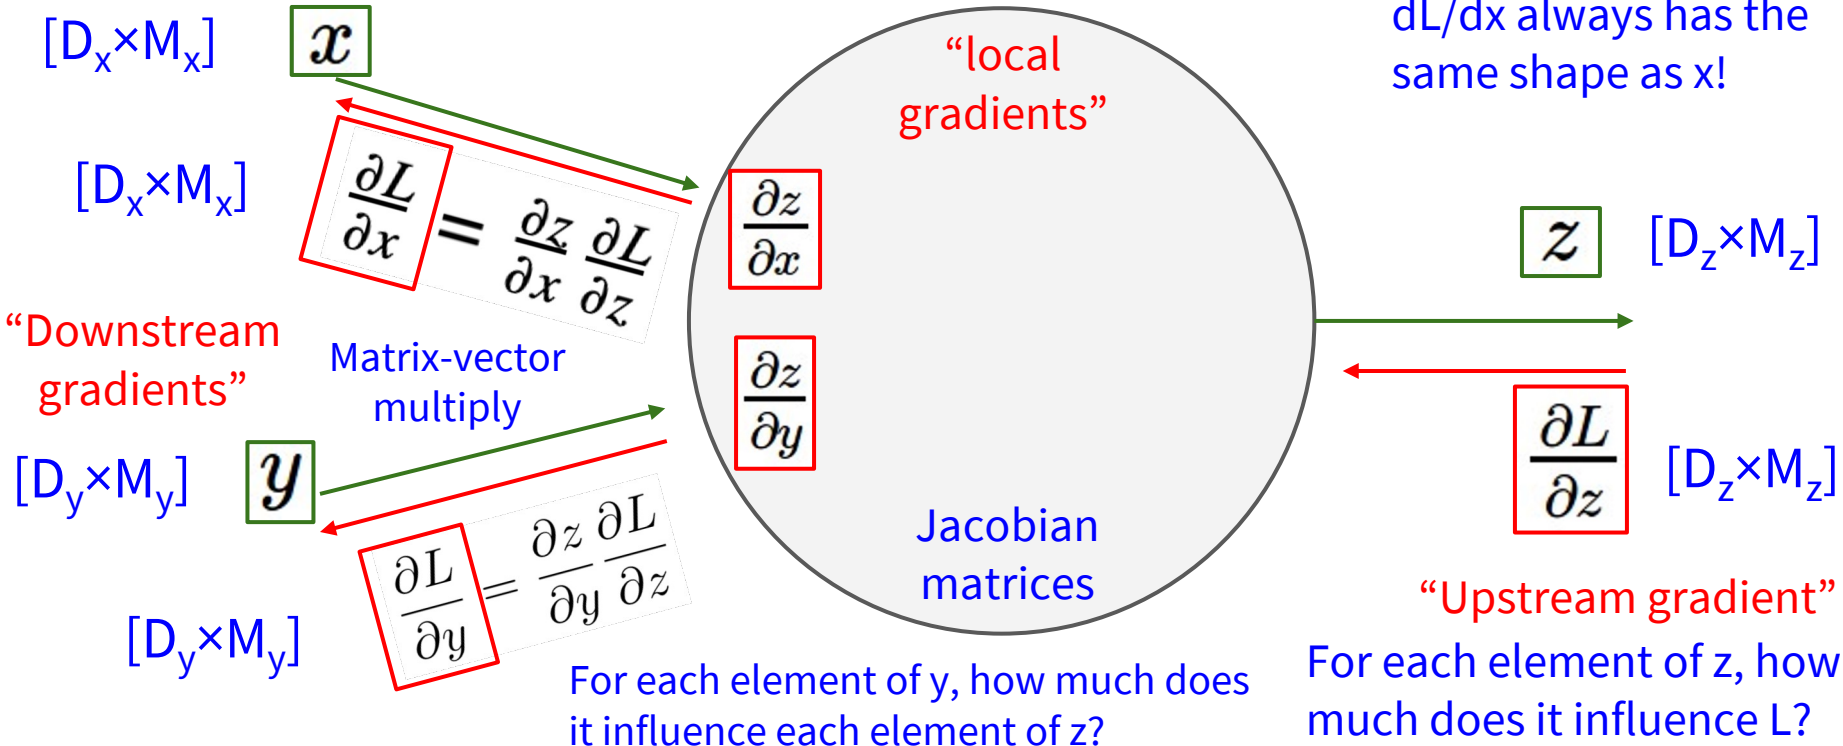

Backprop with Matrices (or Tensors)

Loss L still a scalar!

dL/dx always has the same shape as x !

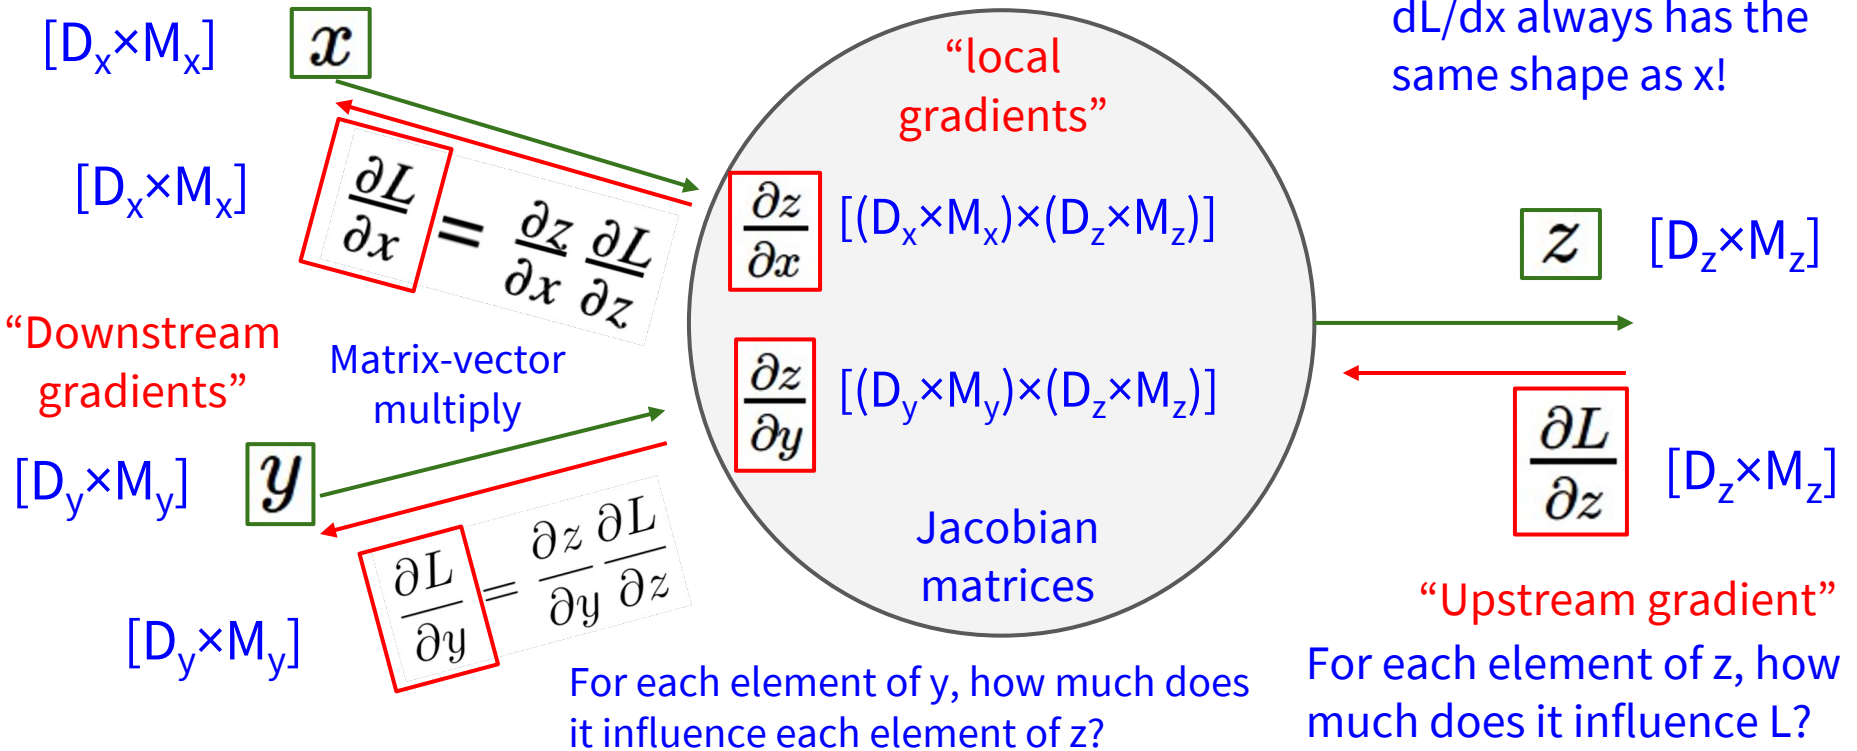

Backprop with Matrices

x: [N×D]

[2 1 -3]


[-3 4 2]

w: [D×M]

[3 2 1 -1]

[2 1 3 2]

[3 2 1 -2]

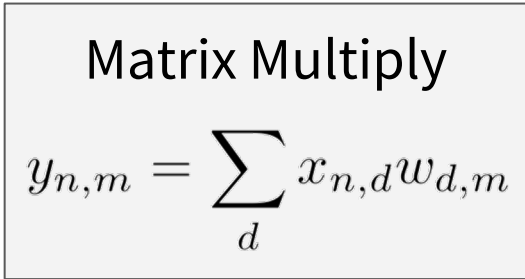

y: [N×M]

[13 9 -2 -6]

[5 2 17 1]

dL/dy: [N×M]

[2 3 -3 9]

[-8 1 4 6]



Also see derivation in the course notes:

<http://cs231n.stanford.edu/handouts/linear-backprop.pdf>

Backprop with Matrices

x: [N×D]

[2 1 -3]

[-3 4 2]

w: [D×M]

[3 2 1 -1]

[2 1 3 2]

[3 2 1 -2]



Matrix Multiply

$$y_{n,m} = \sum_d x_{n,d} w_{d,m}$$



y: [N×M]

[13 9 -2 -6]

[5 2 17 1]

dL/dy: [N×M]

[2 3 -3 9]

[-8 1 4 6]



Jacobians:

dy/dx: [(N×D)×(N×M)]

dy/dw: [(D×M)×(N×M)]

For a neural net we may have

N=64, D=M=4096

Each Jacobian takes ~256 GB of memory!

Must work with them implicitly!

Backprop with Matrices

$x: [N \times D]$

$\begin{bmatrix} 2 & 1 & 3 \\ -3 & 4 & 2 \end{bmatrix}$

$w: [D \times M]$

$\begin{bmatrix} 3 & 2 & 1 & -1 \\ 2 & 1 & 3 & 2 \\ 3 & 2 & 1 & -2 \end{bmatrix}$



Matrix Multiply

$$y_{n,m} = \sum_d x_{n,d} w_{d,m}$$


$y: [N \times M]$
 $\begin{bmatrix} 13 & 9 & -2 & -6 \\ 5 & 2 & 17 & 1 \end{bmatrix}$

$dL/dy: [N \times M]$
 $\begin{bmatrix} 2 & 3 & -3 & 9 \\ -8 & 1 & 4 & 6 \end{bmatrix}$



Q: What parts of y are affected by one element of x ?

Backprop with Matrices

x: [N×D]

[2 1 3]
[-3 4 2]

w: [D×M]

[3 2 1 -1]
[2 1 3 2]
[3 2 1 -2]



Matrix Multiply

$$y_{n,m} = \sum_d x_{n,d} w_{d,m}$$



y: [N×M]
[13 9 -2 -6]
[5 2 17 1]



dL/dy: [N×M]
[2 3 -3 9]
[-8 1 4 6]

Q: What parts of y are affected by one element of x?

A: $x_{n,d}$ affects the whole row $y_{n,\cdot}$

$$\frac{\partial L}{\partial x_{n,d}} = \sum_m \frac{\partial L}{\partial y_{n,m}} \frac{\partial y_{n,m}}{\partial x_{n,d}}$$


Backprop with Matrices

x: [N×D]

[2 1 3]
[-3 4 2]

w: [D×M]

[3 2 1 -1]
[2 1 3 2]
[3 2 1 -2]

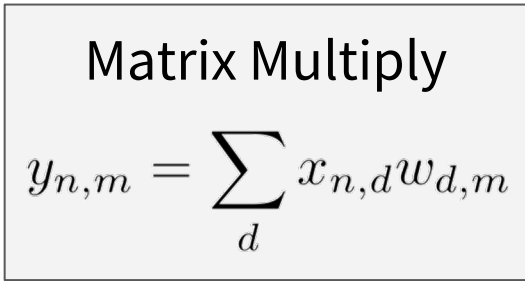

y: [N×M]
[13 9 -2 -6]
[5 2 17 1]

dL/dy: [N×M]



[2 3 -3 9]
[-8 1 4 6]

Q: What parts of y are affected by one element of x?


A: $x_{n,d}$ affects the whole row $y_{n,\cdot}$.

Q: How much does $x_{n,d}$ affect $y_{n,m}$?

$$\frac{\partial L}{\partial x_{n,d}} = \sum_m \frac{\partial L}{\partial y_{n,m}} \frac{\partial y_{n,m}}{\partial x_{n,d}}$$

Backprop with Matrices

$x: [N \times D]$
 $\begin{bmatrix} 2 & 1 & 3 \\ -3 & 4 & 2 \end{bmatrix}$
 $w: [D \times M]$
 $\begin{bmatrix} 3 & 2 & 1 & -1 \\ 2 & 1 & 3 & 2 \\ 3 & 2 & 1 & -2 \end{bmatrix}$



Matrix Multiply

$$y_{n,m} = \sum_d x_{n,d} w_{d,m}$$




$y: [N \times M]$
 $\begin{bmatrix} 13 & 9 & -2 & -6 \\ 5 & 2 & 17 & 1 \end{bmatrix}$

$dL/dy: [N \times M]$
 $\begin{bmatrix} 2 & 3 & -3 & 9 \\ -8 & 1 & 4 & 6 \end{bmatrix}$

Q: What parts of y are affected by one element of x ?
 A: $x_{n,d}$ affects the whole row $y_{n,\cdot}$

Q: How much does $x_{n,d}$ affect $y_{n,m}$?
 A: $w_{d,m}$

$$\frac{\partial L}{\partial x_{n,d}} = \sum_m \frac{\partial L}{\partial y_{n,m}} \frac{\partial y_{n,m}}{\partial x_{n,d}} = \sum_m \frac{\partial L}{\partial y_{n,m}} w_{d,m}$$



Backprop with Matrices

x: [N×D]

$\begin{bmatrix} 2 & 1 & 3 \\ -3 & 4 & 2 \end{bmatrix}$

w: [D×M]

$\begin{bmatrix} 3 & 2 & 1 & -1 \\ 2 & 1 & 3 & 2 \\ 3 & 2 & 1 & -2 \end{bmatrix}$

[N×D] [N×M] [M×D]

$$\frac{\partial L}{\partial x} = \left(\frac{\partial L}{\partial y} \right) w^T$$



Matrix Multiply

$$y_{n,m} = \sum_d x_{n,d} w_{d,m}$$



y: [N×M]
 $\begin{bmatrix} 13 & 9 & -2 & -6 \\ 5 & 2 & 17 & 1 \end{bmatrix}$

dL/dy: [N×M]
 $\begin{bmatrix} 2 & 3 & -3 & 9 \\ -8 & 1 & 4 & 6 \end{bmatrix}$



Q: What parts of y are affected by one element of x?

A: $x_{n,d}$ affects the whole row $y_{n,\cdot}$.

Q: How much does $x_{n,d}$ affect $y_{n,m}$?

A: $w_{d,m}$

$$\frac{\partial L}{\partial x_{n,d}} = \sum_m \frac{\partial L}{\partial y_{n,m}} \frac{\partial y_{n,m}}{\partial x_{n,d}} = \sum_m \frac{\partial L}{\partial y_{n,m}} w_{d,m}$$

Backprop with Matrices

x: [N×D]

[2 1 3]
[-3 4 2]

w: [D×M]

[3 2 1 -1]
[2 1 3 2]
[3 2 1 -2]



Matrix Multiply

$$y_{n,m} = \sum_d x_{n,d} w_{d,m}$$



y: [N×M]
[13 9 -2 -6]
[5 2 17 1]

dL/dy: [N×M]



[2 3 -3 9]
[-8 1 4 6]

By similar logic:

[N×D] [N×M] [M×D]

$$\frac{\partial L}{\partial x} = \left(\frac{\partial L}{\partial y} \right) w^T$$

[D×M] [D×N] [N×M]

$$\frac{\partial L}{\partial w} = x^T \left(\frac{\partial L}{\partial y} \right)$$

These formulas are easy to remember: they are the only way to make shapes match up!

Summary for today:

- (Fully-connected) Neural Networks are stacks of linear functions and nonlinear activation functions; they have much more representational power than linear classifiers
- backpropagation = recursive application of the chain rule along a computational graph to compute the gradients of all inputs/parameters/intermediates
- implementations maintain a graph structure, where the nodes implement the forward() / backward() API
- forward: compute result of an operation and save any intermediates needed for gradient computation in memory
- backward: apply the chain rule to compute the gradient of the loss function with respect to the inputs

